


ASSEMBLY INSTRUCTION

Raphael Oak Bedside Table

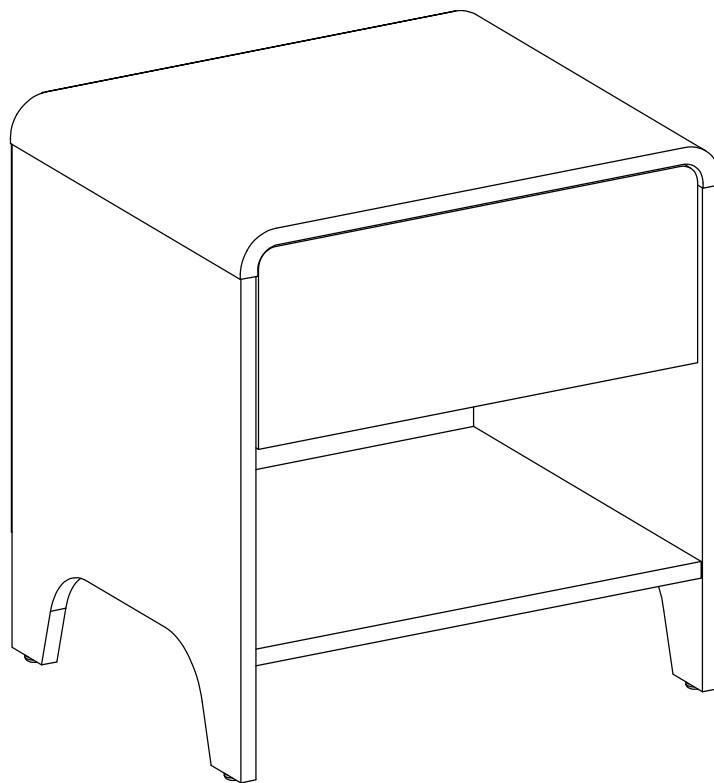

Two people required

www.templeandwebster.com.au

Keep these instructions for future reference

Assemble the furniture on a soft level surface to avoid damaging the furniture or your floor.

Parts of the assembly will be easier with 2 people.

We recommend furniture be assembled near where they will be placed, to avoid moving the product unnecessarily once assembled.

If there is a need to move the furniture, please remove all loose items and have extra hands to help lift the furniture to the desired location. Dragging the furniture will damage both the furniture and the floor.


Regularly check and re-tighten (if necessary) all bolts on furniture that you have assembled yourself.

Warning: In order to prevent overturning, this product must be used with the wall attachment device provided.


Care and Maintenance of your Furniture

Wipe clean with a damp cloth. Use only water or a gentle detergent.
Wipe dry with a clean cloth.


Tools Required




DO NOT USE



Mallet




Flat head Screwdriver



Cross Screwdriver

Time Required




30 min


Part List

- | | | | |
|---|--------------|----|---------------|
| 1 | Top Panel | 6 | Front Drawer |
| 2 | Bottom Panel | 7 | Left Drawer |
| 3 | Left Panel | 8 | Right Drawer |
| 4 | Right Panel | 9 | Back Drawer |
| 5 | Back Panel | 10 | Bottom Drawer |

people Required

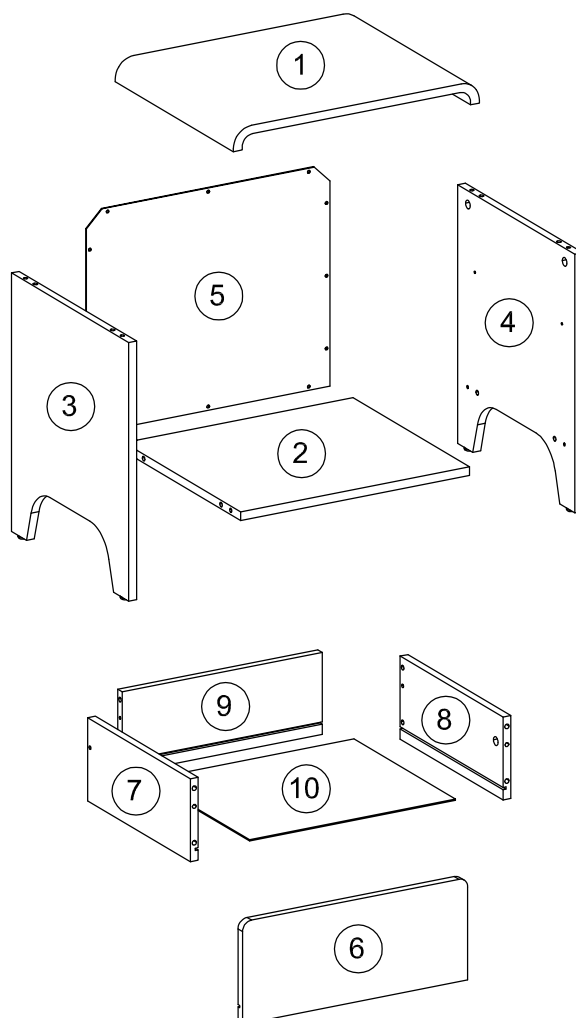


Hardware/Fittings



Ø15x12 mm Cam Lock x 10

A



Ø7.5x32 mm Cam Bolt x 10

B




Ø20 mm Cam Sticker x 6

C



Ø8x32 mm Plastic Dowel x 16

D




Ø10x33.5 mm Screw x 2

E



Ø6x8 mm Screw x 4

F



Ø6x13 mm Screw x 4

G




Ø3x12 mm Screw x 12

H



Ø4x19 mm Screw x 4

I



350 mm Drawer Runner x 1

J



Anti-tip Bracket x 1




K



Backply Stopper x 4



L

1

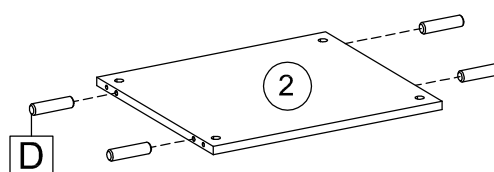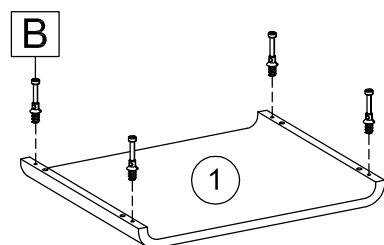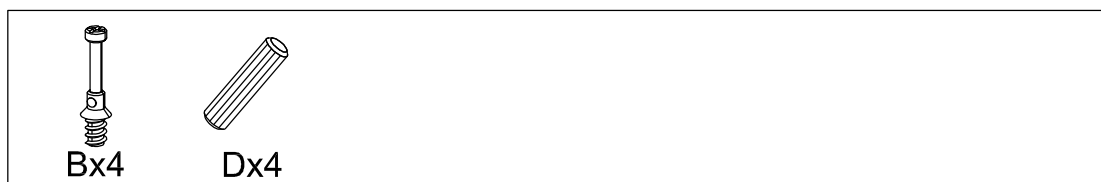



Screw 4 x Cam Bolts (B) into Top Panel (1).
Insert 4 x Plastic Dowel (D) into Bottom Panel (2).
If necessary, gently tap the Plastic dowels with a mallet.

2

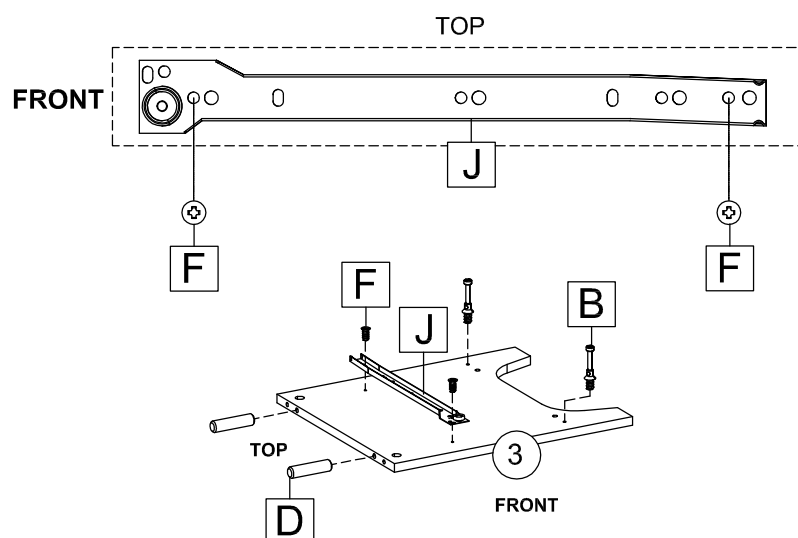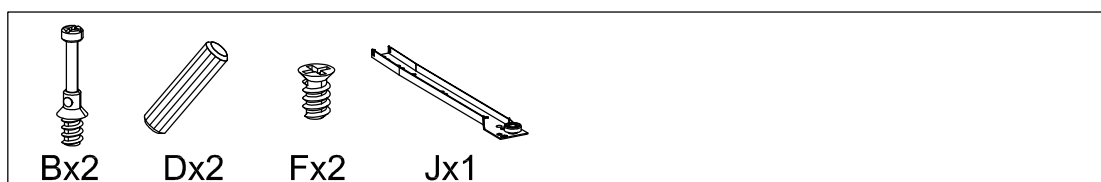


Screw 2 x Cam Bolts (B), then Insert 2 x Plastic Dowels (D) into Left Panel (3).
If necessary, gently tap the Plastic dowels with a mallet.
Position Drawer Runner (J) to the front edge of the Left Panel (3).
Fix the Drawer Runners (J) to the Sides through holes shown using 2 x Screws (F).

3

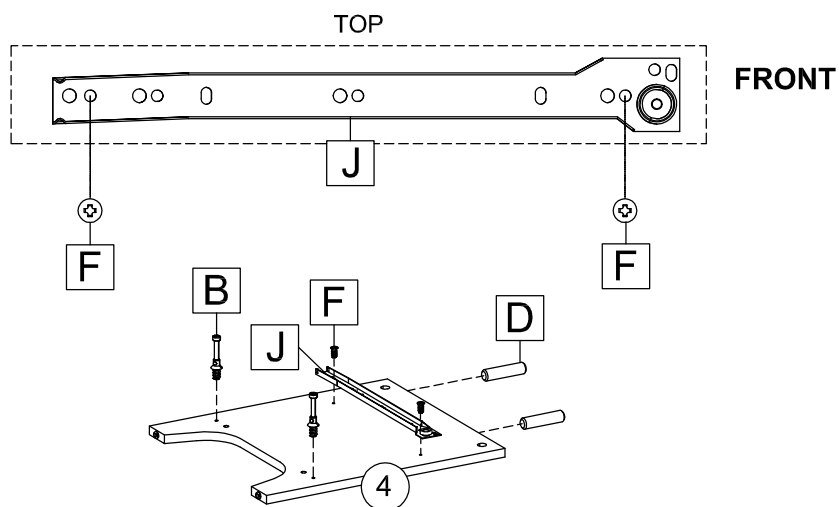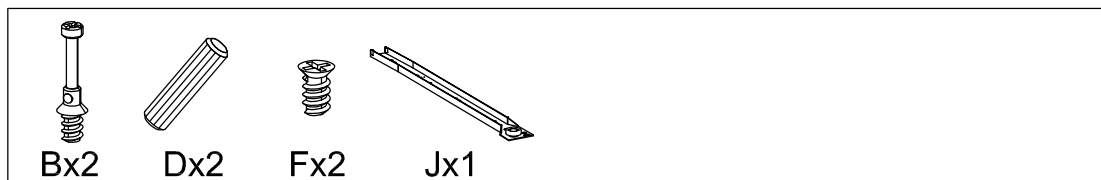

Screw 2 x Cam Bolts (B), then Insert 2 x Plastic Dowels (D) into Right Panel (4),
 If necessary, gently tap the Plastic dowels with a mallet.
 Position Drawer Runner (J) to the front edge of the Right Panel (4),
 Fix the Drawer Runners (J) to the Sides through holes shown using 2 x Screws (F).

4

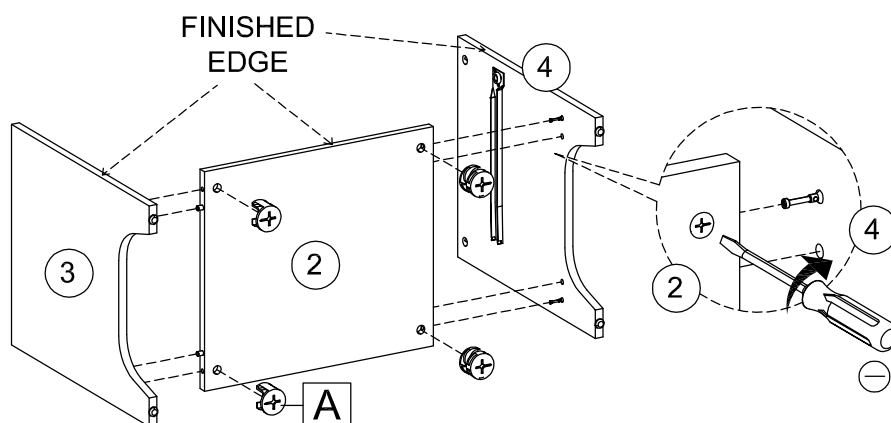


Attach Left Panel (3) and Right Panel (4) to Bottom Panel (2) using 4 x Cam lock (A),
 Use a screwdriver to turn the Cam lock clockwise to lock.

6


5



Ax4



Cx4

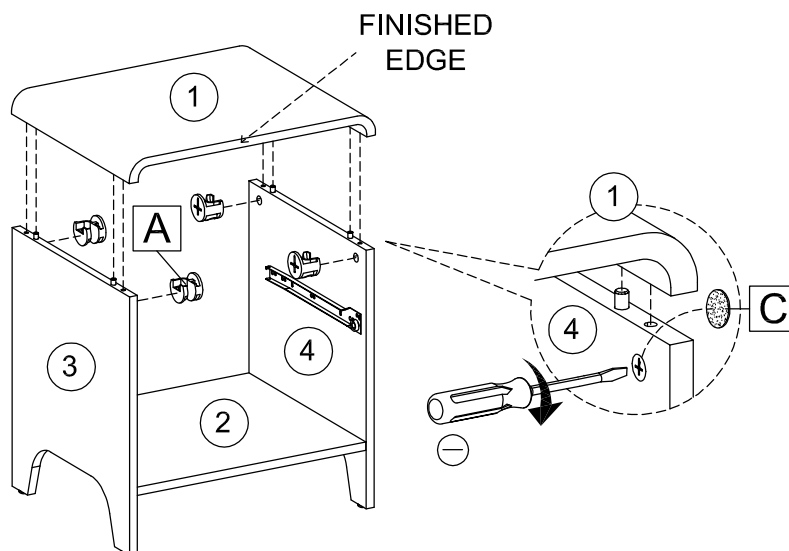

Attach Top Panel (1) to Assembly using 4 x Cam lock (A),
Use a screwdriver to turn the Cam lock clockwise to lock.
Paste 4 x Cam Sticker (C) as shown.


6



Hx12








Kx1

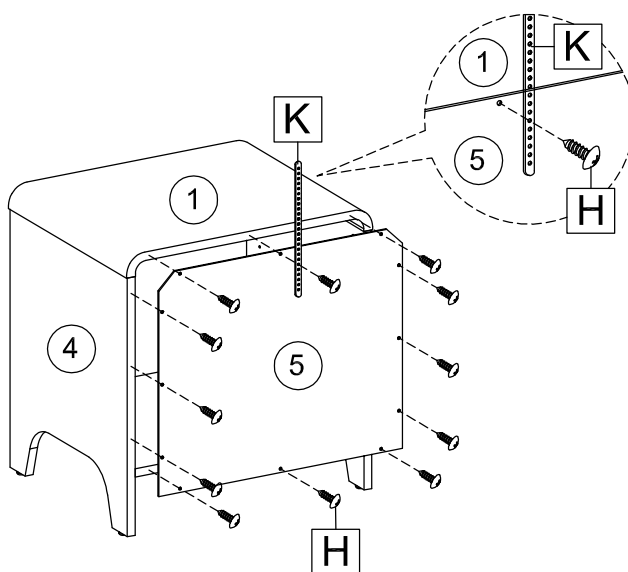

Attach Back Panel (5) to Assembly using 11 x Screws (H).
Attach 1 x Anti-tip Bracket (K) to Back Panel (5) using 1 x Screw (H).


7

7

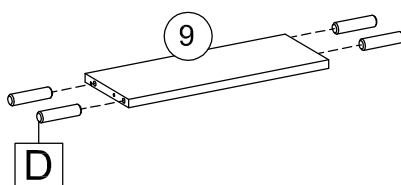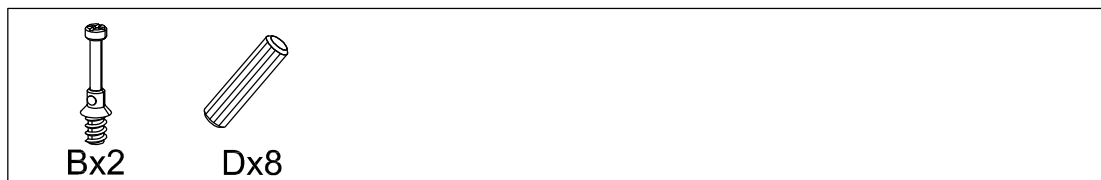

Screw 2 x Cam Bolts (B) into Front Drawer (6).
 Insert 8 x Plastic Dowel (D) into Left Drawer (7), Right Drawer (8) and Back Drawer (9).
 If necessary, gently tap the Plastic dowels with a mallet.



8

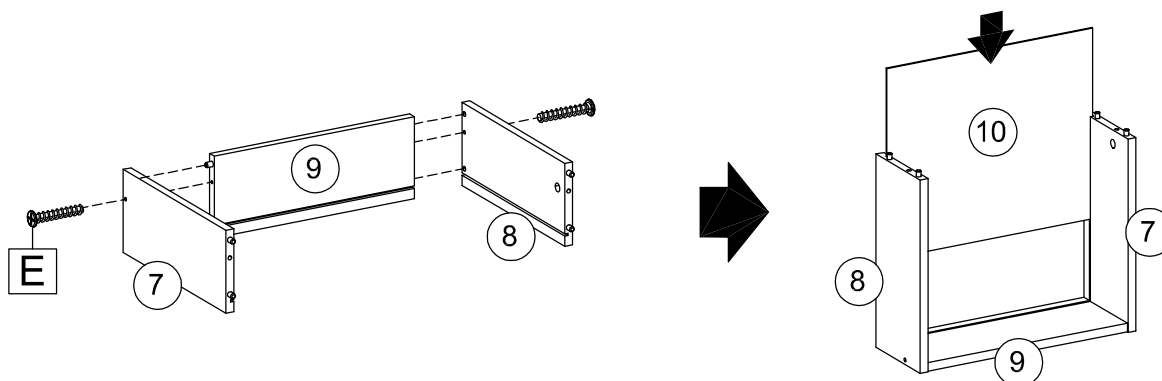

Attach Right Drawer (8) and Left Drawer (7) to Back Drawer (9) using 2 x Screws (E).
 Insert Bottom Drawer (10) into Assembly Drawer.



8

9

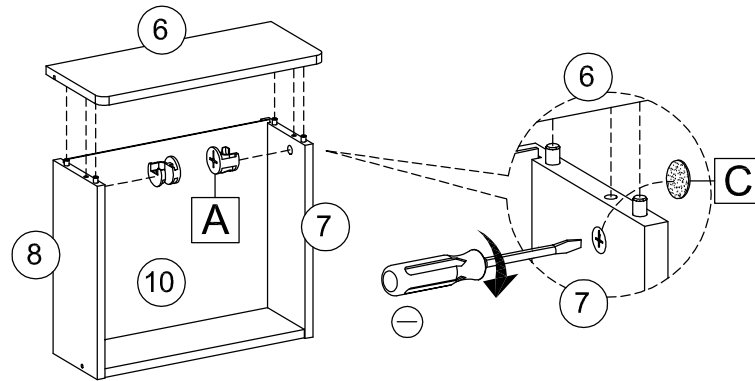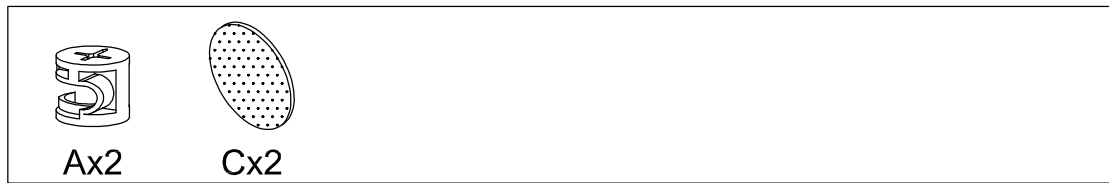


Attach Front Drawer (6) to Assembly using 2 x Cam lock (A),
Use a screwdriver to turn the Cam lock clockwise to lock.
Paste 2 x Cam Sticker (C) as shown.

10

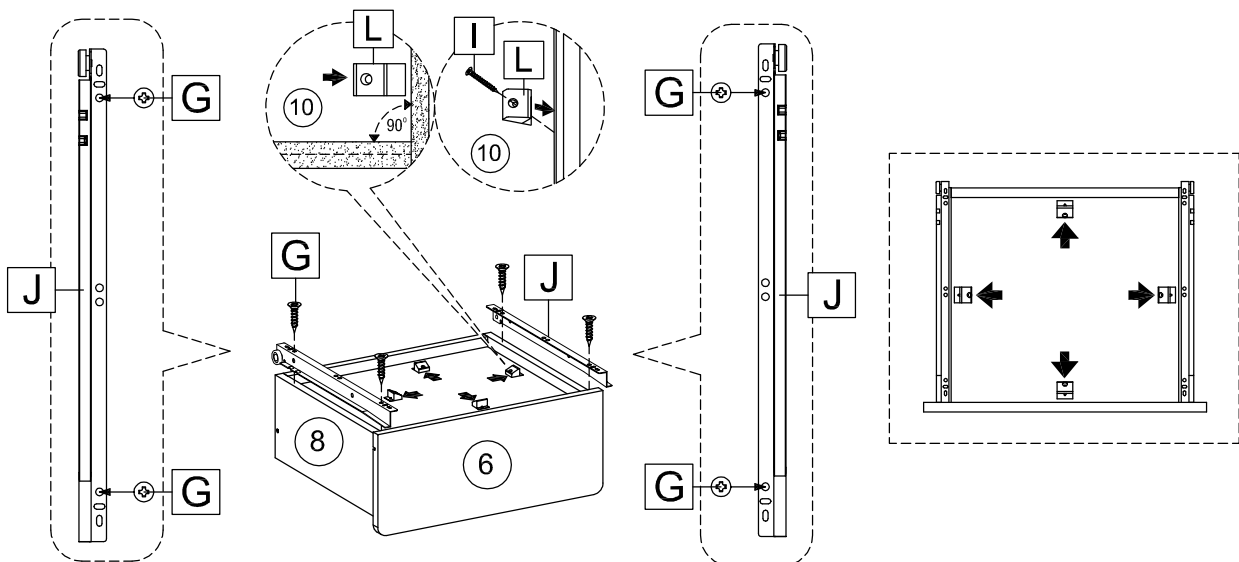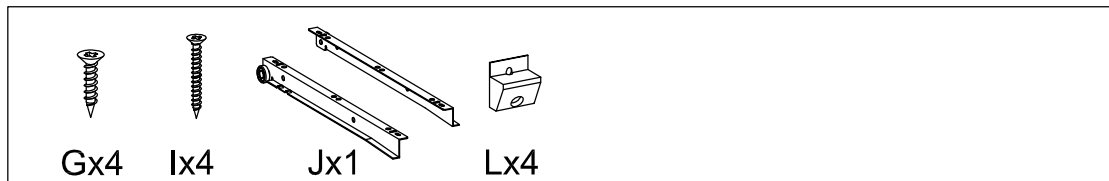


Attach 4 x Backply Stopper (L) to Drawer using 4 x Screw (I).
Attach 1 x Drawer Runner (J) to Drawer using 4 x Screw (G).

11

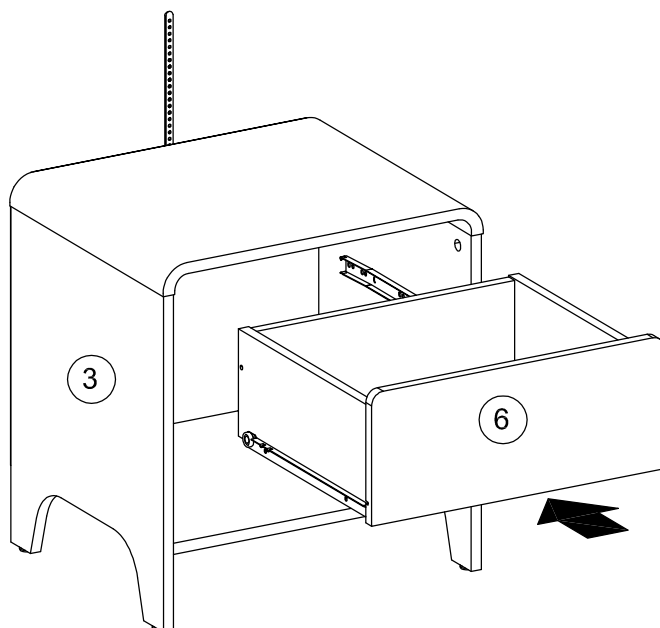

Insert Drawer into Assembly.

12

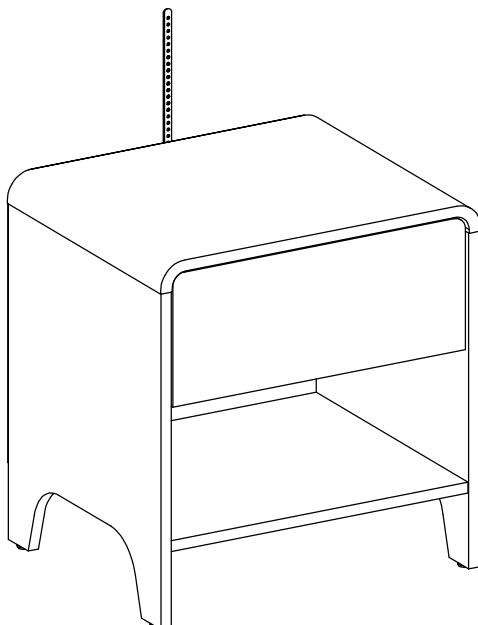

Assembly is complete.

Please dispose of all
packaging thoughtfully.