

SATURN Series Installation Guide

We strongly recommend that you read this manual carefully before installation.
Installation MUST carry out by a qualified and licensed electrician.






Replacement
Warranty

Models Parameters:-

MXFSR20W 25W Exhaust Fan Round Matt White

Technical Specification

Air Extraction m ³ /hr	180m ³ /hr
Power Wattage	25W
Voltage	220-240V 50Hz
Capacity (L/S)	≤89L/S
Materials / Housing	Plastics with ABS Fascia
IP Rating	IPX4
Cutout Size	Dia 240mm
Noise Level (dB)	<45dB
Minimum Height	220mm clearance height above the unit
Ducting Size	100mm
Accessories Included	900mm cable with 3 pin plug



Installation Location


NB: This product is for indoor installation only.

- Unit must be installed into a horizontal location, not suitable for wall mount or raked ceilings
- Check ceiling cavity for hidden beams, structures and concealed electrical cabling prior to installation
- Unit should not be installed directly above shower or bath cubicles or in any location where splashed water can contact the unit, or the switch can be reached and turned on by someone within a bath or shower
- Position fan in a central location to maximise ventilation to all areas
- Ensure air is ventilated to an outside location (not into roof cavities) via the use of a duct/grill assembly which is not supplied
- Do not install the exhaust fan within 1m distance from a ceiling or wall mounted heat source

CAPACITY DISCLAIMER

All capacity figures and technical data quoted is provided by the manufacturer, Capacity figures are based on the unit free flowing (not connected to ducting). If you are ducting this unit it is advisable to keep the duct run as short, straight and tight as possible.

Wiring Diagram

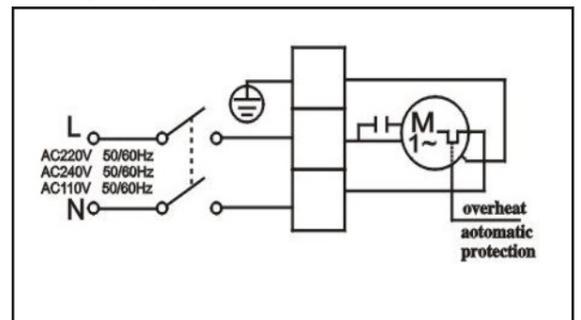

WARNING Installation **MUST** carry out by a qualified and licensed electrician.

Installation Instructions

NB: Installation MUST carry out by a qualified and licensed electrician.

- Turn OFF mains power
- Ensure Location Instructions (see front page) are followed
- Mark and cut a Ø240mm hole into the ceiling using proper tools such as plaster saw, jig saw or hole saw

NB: Highly recommended to wear safety glasses to avoid fell from the ceiling into the eyes

- If ducting is required for ventilation. Install a 100mm duct pipe to the exhaust fan and lay the ducting across the ceiling and onto a suitable 100mm exhaust vent (see figure 1)
- Plug the cable into the power point socket in the ceiling (see figure 2)
- Position fan in hole, rotate mounting screws with a screwdriver until slip blocks firmly secure fan onto ceiling plaster. Do not over-tighten (see figure 3)
- Replace external cover over fan blades by locating spring hole slots and allowing springs to pull the cover plate up over the fan and onto the ceiling surface

NB: Please ensure yellow label "Tear this seal before using or installing!" is removed from the unit

- Turn ON mains power

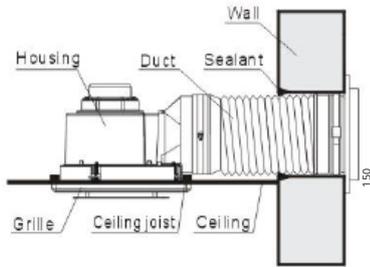


Figure 1: Installing ducting (sold separately)




Figure 2: Connect the power

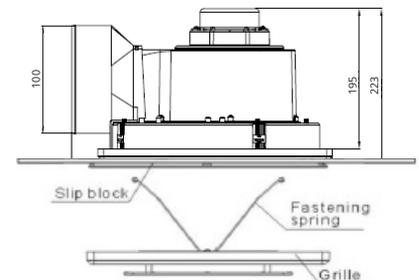


Figure 3: Fix the fan in place and install cover

Accessories

4 x Internal plastic mounting dust covers (Remove grill as far as safety wire will allow and then fit the dust covers over the 4 internal ceiling mounting points).

2 Year Replacement Warranty

Visit our website for details <https://www.martecaustralia.com.au/warranty-statement/>

WARNING

- Installation of bathroom heater and exhaust fan **MUST** follow SAA standards and meet local authority regulations.
- Installation **MUST** be carried out by a qualified and licensed electrician.
- Bathroom heater and exhaust fan **MUST NOT** be installed under any electrical outlet.
- Bathroom heater and exhaust fan **MUST NOT** be installed near curtains or other combustible materials.
- Joists, beams and rafters **MUST NOT** be cut or notched to install the product.
- **DO NOT** attempt to open and repair the product.
- The warranty is **VOID** if product is not installed according to this installation guide.

CARE & MAINTENANCE

- The product must be turned OFF and cool before cleaning.
- To clean the fascia simply use a dampened cloth.