

ASSEMBLY INSTRUCTIONS

















PAGE: 1/4



MODEL : ELEORA SIDEBORD BUFFET

Before you begin, please follow assembly instructions carefully, then follow them step by step.

Read instruction carefully . See Furniture Parts list and Hardware List for guidance . Be sure you have all parts before you start assembling .
Place and assemble furniture on a clean flat soft surface , such as carpet or rug to prevent being scratched .

PART LIST		QTY
1	TOP PANEL	1 PC
2	BOTTOM PANEL	1 PC
3	SIDE PANEL (L)	1 PC
4	SIDE PANEL (R)	1 PC
5	CENTER PANEL	1 PC
6	SHELF PANEL (L)	1 PC
7	SHELF PANEL (R)	1 PC
8	BACK PANEL	1 PC
9A	DOOR PANEL (SIDE)	1 PC
9B	DOOR PANEL (CENTER)	1 PC
10A	DOOR PANEL (CENTER)	1 PC
10B	DOOR PANEL (SIDE)	1 PC
11	METAL FRAME	2 PCS
12	METAL BONE	2 PCS

HARDWARE				
A	MINI FIX	A1 	6 SETS	A3  4 PCS
		A2 		A4  2 PCS
B	M8 X 30MM WOOD DOWEL			12 PCS
C	M6 X 50MM CSK CAP WOOD SCREW			6 PCS
D	ALLEN KEY M4			1 PC
E	5/8 NAIL			31 PCS
F	M3.5 X 16MM C.B SCREW			60 PCS
G	JCBC SCREW M6 X 30MM			12 PCS
H	JCBC SCREW M6 X 40MM			4 PCS
I	HANDLE 4020 L BAR-200MM			4 PCS
J	METAL SHELF SUPPORT			8 PCS
K	SOFT CLOSING 5/8 HINGES			4 PCS
L	SOFT CLOSING 7/8 HINGES			4 PCS
M	METAL LEG 50 x 50 x H140MM (CENTER)			1 PC

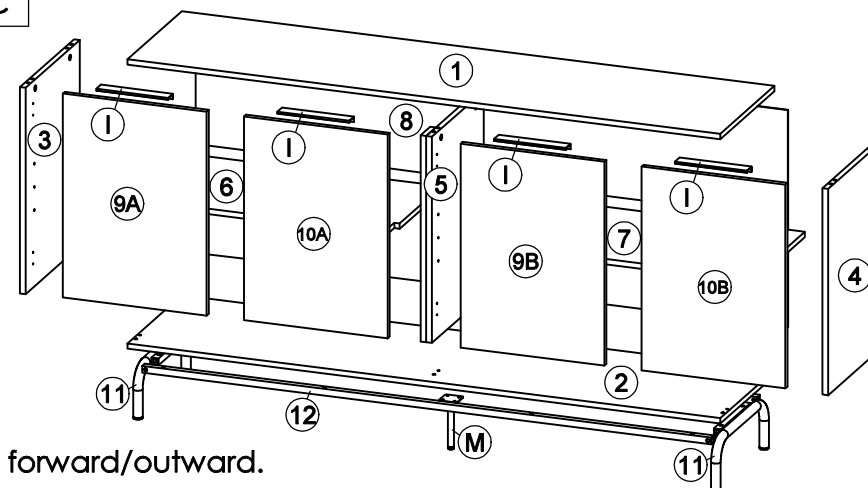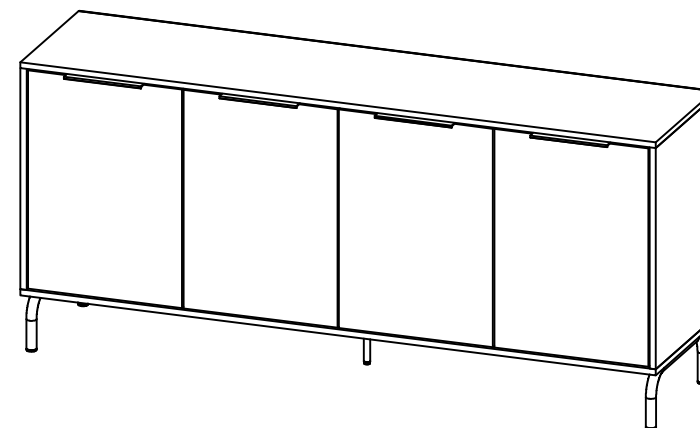

SELF-PREPARED TOOLS: Tools below are NOT included in package.



SCREWDRIVER



HAMMER

Reminder:


Please ensure that all surfaces and edges with colours/laminations are facing forward/outward.

ASSEMBLY INSTRUCTIONS

PAGE: 2/4

STEP 1


- Insert hardware **A1** onto panel (3), (4) and (5).
(Repeat 6 times.)
- Insert hardware **A2** onto panel (1).
(Repeat 6 times.)
- Insert hardware **B** onto panel (3), (4) and (5).
(Repeat 12 times.)

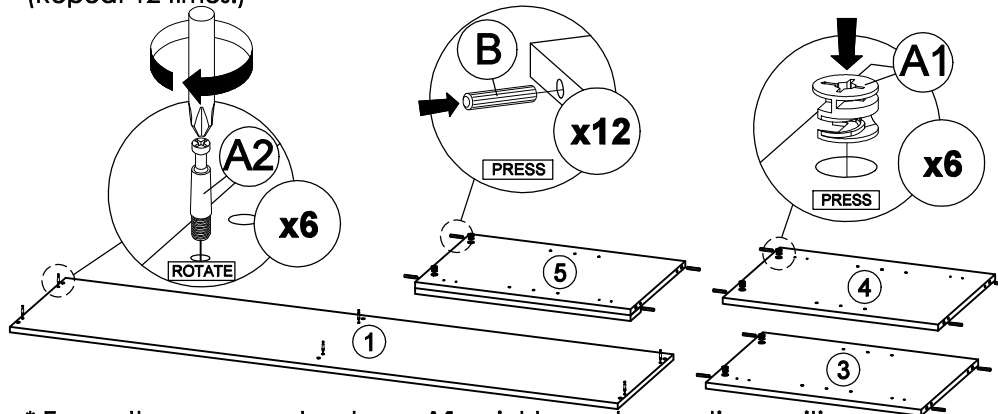

* Ensure the arrows on hardware **A1** point towards mounting positions.

STEP 3

- Connect panel (2) to panel (3), (4) and (5) by using hardware **C** and **D**.
(Repeat 6 times.)

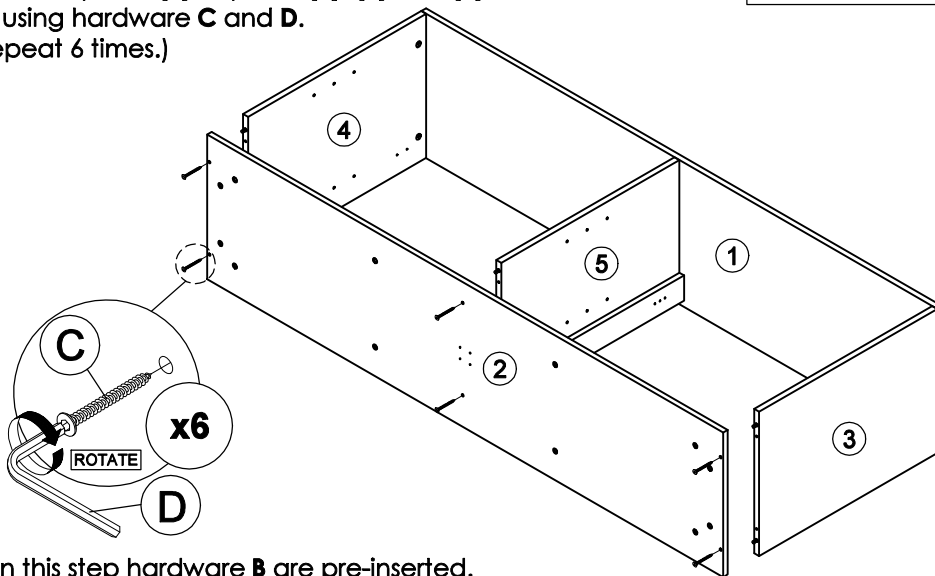

* In this step hardware **B** are pre-inserted.


MODEL : ELEORA SIDEBORD BUFFET

STEP 2

- Attach panel (1) to panel (3), (4) and (5).
- Insert all hardware **A2** into **A1**.
- Rotate all **A1** until tight.
- Apply **A3** and **A4** onto all **A1**.
(Repeat 6 times.)




OR

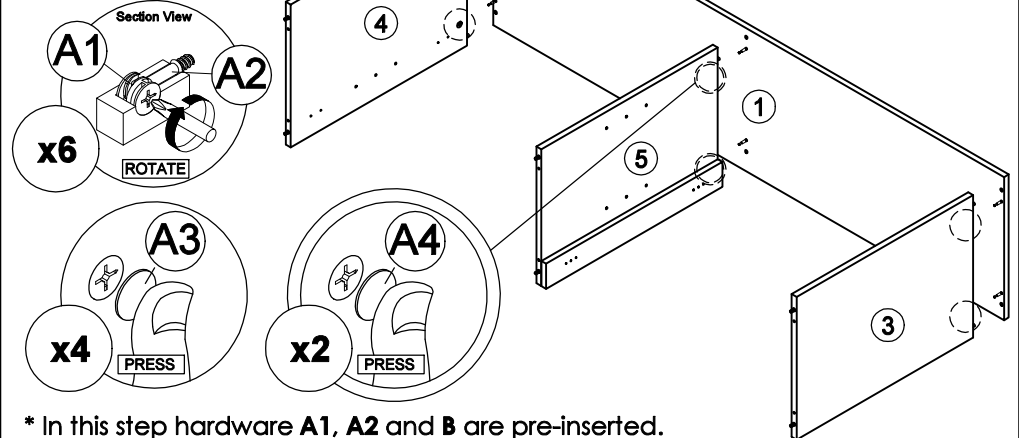

* In this step hardware **A1**, **A2** and **B** are pre-inserted.

STEP 4

- Connect Metal Bone (12) to Metal Frame (11) by using hardware **D** and **H**.
(Repeat 4 times.)

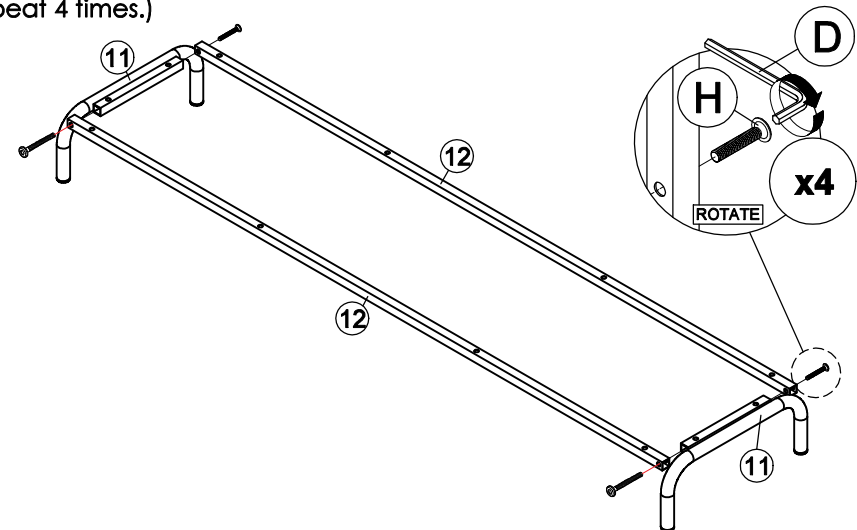


ASSEMBLY INSTRUCTIONS

PAGE: 3/4

MODEL : ELEORA SIDEBORD BUFFET

STEP 5

Connect Metal Frame (11) and Metal bone (12) to panel (2) by using hardware D and G.
(Repeat 12 times.)

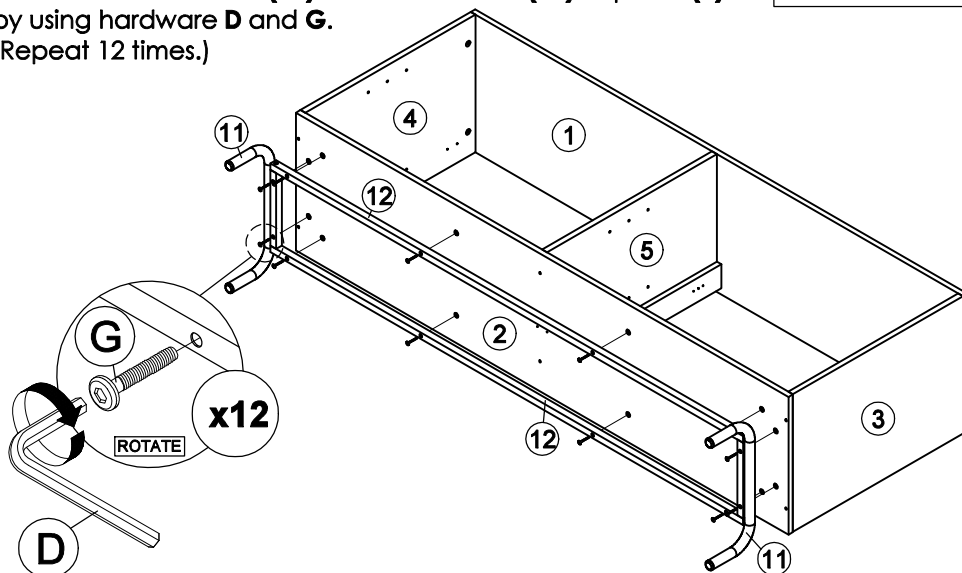


STEP 6

Assemble hardware M onto panel (2) by using hardware F.
(Repeat 4 times.)




Please note that the hardware N has a **Plastic adjuster** at the bottom to unscrew and adjust the height of hardware N if necessary.

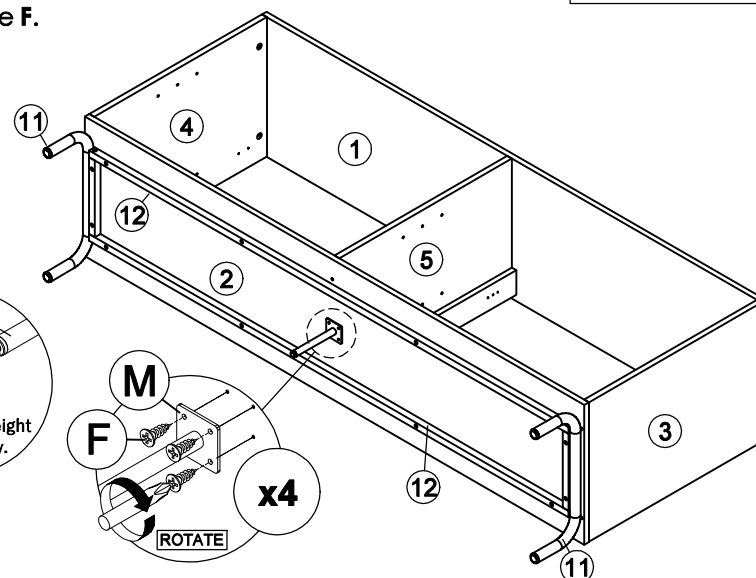


STEP 7

Assemble panel (8) to entire body with hardware E.
(Repeat 31 times.)

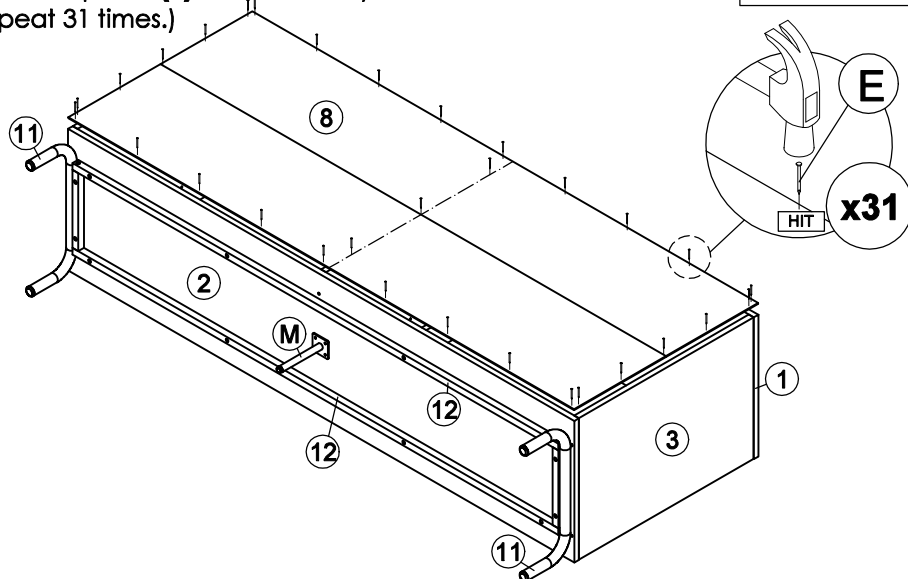

STEP 8

- Insert hardware J into mounting positions on panel (3), (4) and (5) by hand.
(Repeat 8 times.)
- Assemble panel (6) and (7) into between panel (3), (4) and (5).
(Repeat 2 times.)

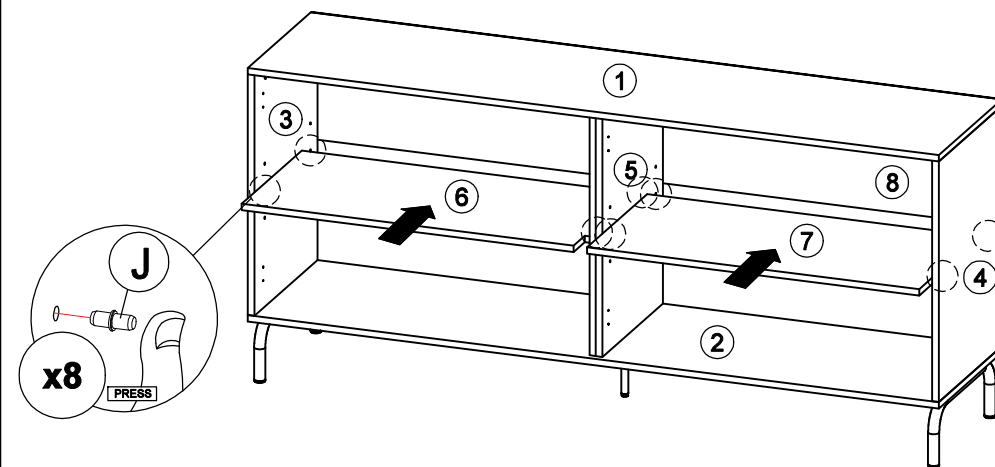


ASSEMBLY INSTRUCTIONS

PAGE: 4/4


STEP 9

Fix hardware **I** onto panel **(9A)**, **(9B)**, **(10A)** and **(10B)** by using hardware **F**.
(Repeat 2 times for each hardware.)

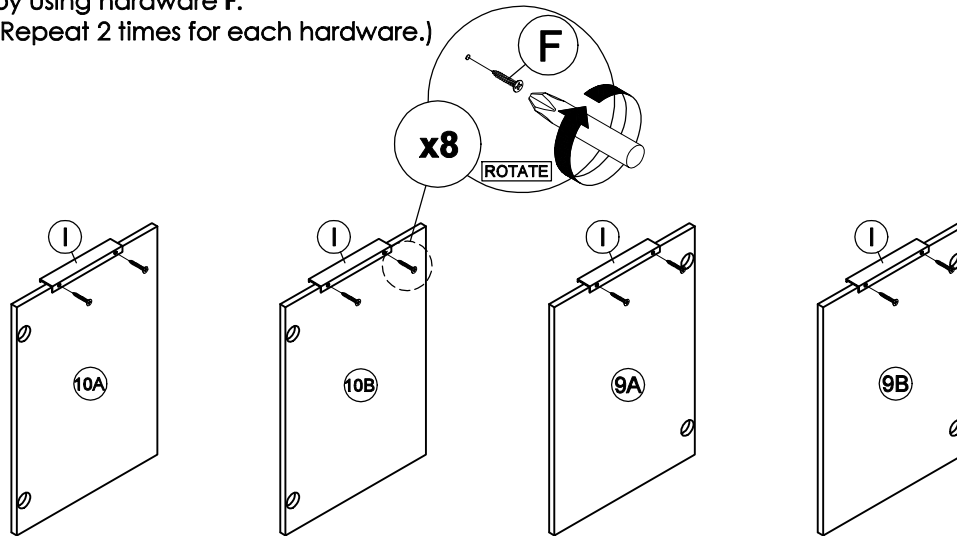

STEP 11

- Fix hardware **K** into panel **(5)** by using hardware **F**.
(Repeat 4 times for each hardware.)
- Tighten or loosen the screw to adjust position of panel **(9B)** and **(10A)**.
(Do only when needed.)

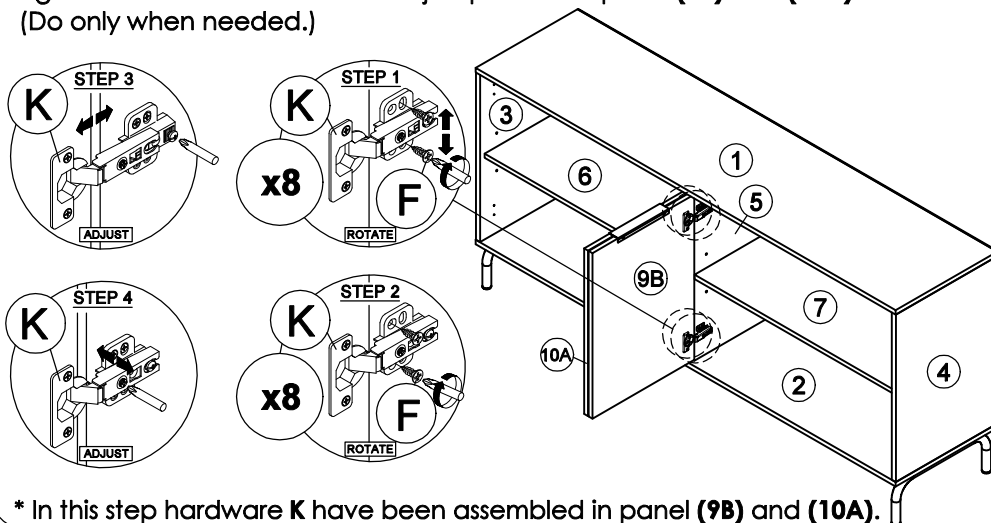


* In this step hardware **K** have been assembled in panel **(9B)** and **(10A)**.

MODEL : ELEORA SIDEBORD BUFFET


STEP 10

- Fix hardware **K** onto panel **(9B)** and **(10A)** by using hardware **F**.
(Repeat 2 times for each hardware.)
- Fix hardware **L** onto panel **(9A)** and **(10B)** by using hardware **F**.
(Repeat 2 times for each hardware.)

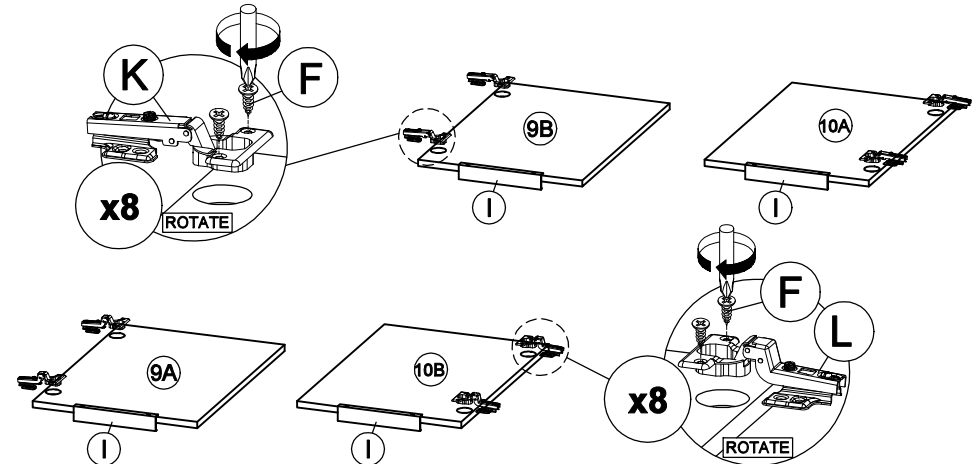

STEP 12

- Fix hardware **L** into panel **(3)** and **(4)** by using hardware **F**.
(Repeat 4 times for each hardware.)
- Tighten or loosen the screw to adjust position of panel **(9A)** and **(10B)**.
(Do only when needed.)

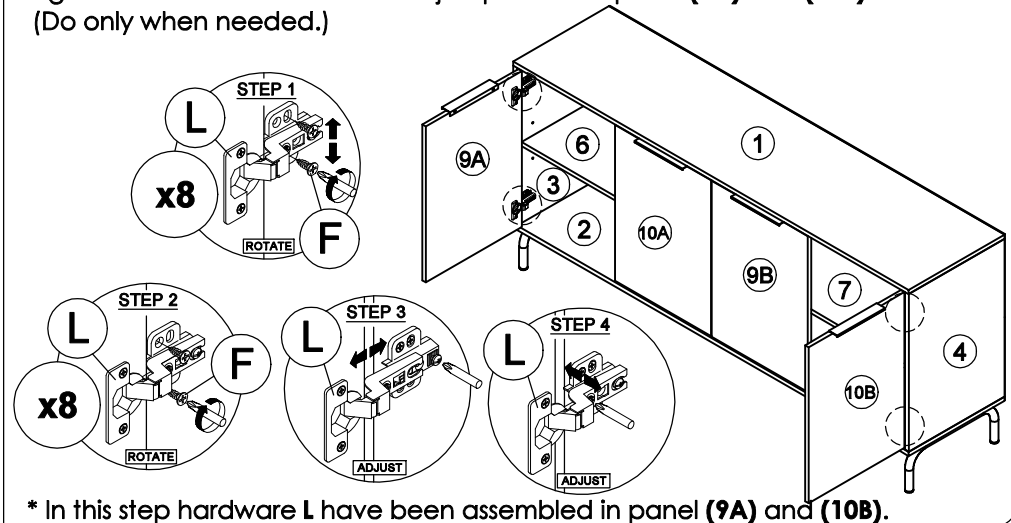

* In this step hardware **L** have been assembled in panel **(9A)** and **(10B)**.