
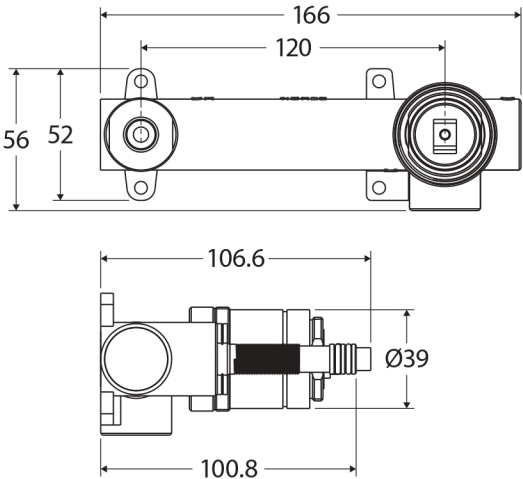


Features

- Adjustable set out for flexibility during installation
- Protective caps to prevent damage during wall construction
- Use with high quality front-of-wall dress kit finishes from Kaya, Tono, Sansa & Axle ranges
- High quality European cartridge (35 mm)
- Made from eco-friendly lead free brass

\*Defined as containing less than 0.25% lead.

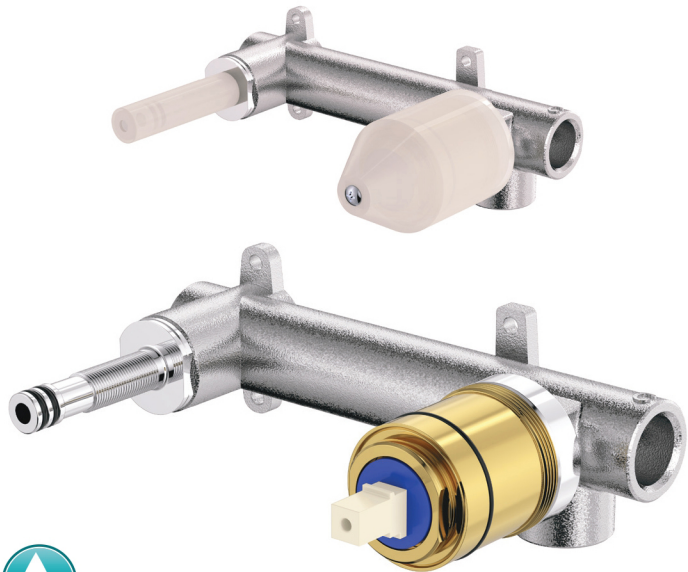

Available in



Body Only  
230011



Specifications

|                          |                                                                              |
|--------------------------|------------------------------------------------------------------------------|
| Mixer Type               | 35 mm cartridge                                                              |
| Operating Pressure       | Min: 150 kPa / 1.5 bar<br>Max: 500 kPa / 5 bar<br>Optimum: 350 kPa / 3.5 bar |
| Operating Temperature    | Hot: Max 80°C<br>Cold: Min. 5°C                                              |
| Inlet Connections        | ½" BSPP                                                                      |
| Suitable Hot Water Units | Storage tank and continuous flow only. Not suitable for gravity feed.        |



While we aim to ensure specifications are correct at the time of publication, Fienza reserves the right to make modifications without prior notice. Physical colour may vary from image shown. All measurements are shown in millimetres. Always use physical product measurements for mark-ups and roughing-in as the technical drawing may differ from actual product received.