



XL-LED Performance Medium Circular Ceiling Lights



XLLED116M / XLLED116MD

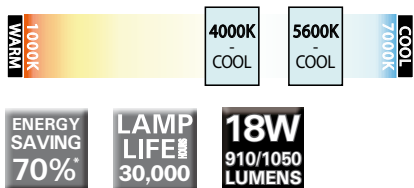

PRODUCT SPECIFICATIONS

ELECTRICAL

Supply Voltage	230-240V AC
Supply Frequency	50-60Hz
Supply Current	100mA
Power Factor	0.92
Total Input Power	18W
Secondary Output Voltage	200V DC
Secondary Output Current	80mA
Lamp Power	18W

MATERIALS

Base	Metal
Diffuser	Acrylic
Diffuser Clips	Plastic
Lens	Polycarbonate
Controller Base & Cover	Thermoplastic

THERMAL

Ambient Temperature Rating	25°C
Maximum Surface Temp	65°C
Ingress Protection Rating	IP44

OPTICAL / PHOTOMETRIC

	4000K	5600K
Luminous Flux	910 lumens	1050 lumens
CRI	>70	>70
Beam Angle	120°	120°

WEIGHT / LIFE

Weight	1.4Kg
LED Lamp Life	30,000HR

PRODUCT FEATURES

XL-LED Performance 240V Circular LED Ceiling Light

- 18W 4000K/5600K LED ceiling light
- White painted metal base
- Opal acrylic diffuser with 3 twist lock clips
- Inbuilt integral driver
- Weather resistant IP44

* Compared to a standard T8 circular fluorescent lamp



REFERENCE	COLOUR	CODE
XLLED116M	Opal	26561
XLLED116MD	Opal	27205

Panel & Oysters

XL-LED PERFORMANCE