

Davis Fabric Executive Office Chair

30MIN

APPROXIMATE ASSEMBLY TIME

1 PERSON ASSEMBLY



FLOOR AREA
1M x 1M



REQUIRED ASSEMBLY SPACE

ASSEMBLED DIMENSIONS



Davis Fabric Executive Office Chair

Tips before you start:


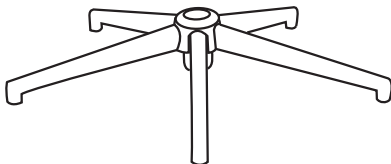

1. Please check that all parts are present before you start the assembly of your furniture.
2. For ease and speed of assembly, we recommend that before you commence each step of the assembly, that you identify all the parts required for that step.
3. For larger items, please ensure that you have sufficient space and people (as indicated on page 1) to assemble your product safely.
4. We recommend that, where possible, all items are assembled near to the area in which they will be placed in use, to avoid moving the product unnecessarily once assembled.
5. For the protection of your furniture, we recommend that the product is placed on a protected surface during assembly to prevent any damage.
6. During assembly please take care not to over-tighten any fittings, as this may damage the product.
7. Always place the product on a flat, steady and stable surface.
8. Do not stand on the product. Do not use the product as a stepladder.
9. This product is intended for indoor, household use only as it is non industrial product.

Care and Maintenance of your Furniture

- ☒ Please periodically check all fittings and re-tighten as necessary.
- ☒ To clean your item, please use a damp cloth and wipe clean.
- ☒ Protect your furniture from spills and stains—spray them with scotch gard to repel liquids and stains


Davis Fabric Executive Office Chair

HARDWARE & PARTS LISTS

(1)	1PC	(2)	1PC	(3)	1PC
					
SEAT-BACK CUSION		MECHANISM		GAS SPRING	
(4)	1PC	(5)	5PCS	(6)	4PCS
					
FIVE-STAR BASE		CASTORS		SCREW	
(7)	4PCS	(8)	1PC		
					
SHIM		ALLEN KEY			
3/4					


Davis Fabric Executive Office Chair

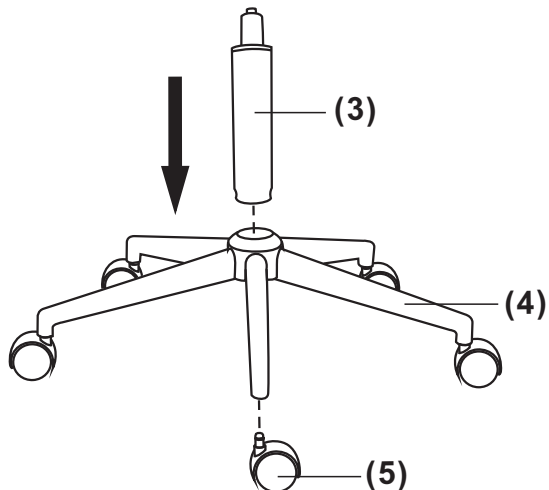STEP 1



Put the castors and gas spring in the holes of five-star base.

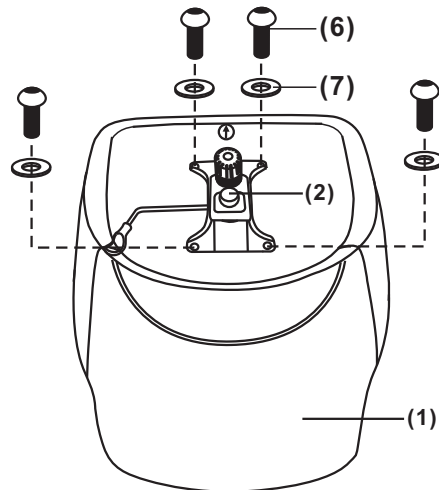STEP 2



Put the mechanism on the back of seat, make sure the tension control on the front of seat, then put screws in the holes with the gaskets between screws and holes, tight the screws.

STEP 3



Install the seat-back cushion on the Gas spring.

STEP 4



Your chair is ready for use.