

BEDSIDE TABLE

ASSEMBLY INSTRUCTIONS



TIPS BEFORE YOU START


- Please check that all parts are present before you start the assembly of your furniture. 1.
- For ease and speed of assembly, we recommend that before you commen ce each step of the 2. assembly, that you identify all the parts required for that step.
- 3. For larger items, please ensure that you have sufficient space and people to assemble your product safely.
- We recommend that, where possible, all items are assembled near to the area in which they will be 4. placed in use, to avoid moving the product unnecessarily once assembled.
- 5. For the protection of your furniture, we recommend that the product is placed on a protected surface during assembly to prevent any damage.
- 6. During assembly please take care not to over-tighten any fittings, as this may damage the product. Do not use power tools.
- 7. Always place the product on a flat, steady and stable surface.
- Do not stand on the product. Do not use the product as a stepladder. 8.
- This product is intended for indoor, household use only as it is a non-industrial product. 9.
- Please use caution and care when lifting the product to avoid personal injury and/or product 10. damage.


CARE AND MAINTENANCE OF YOUR FURNITURE

- ◩ Please periodically check all fittings and re-tighten as necessary.
- To clean your item, please use a damp cloth and wipe clean. V
- To clean glass, please use glass cleaner. M
- Never allow any kind of liquid to remain on your furniture. Absorption can cause wood to warp or V finishes to de-laminate.
- Please do not place hot items (eg. hot drinks) directly on to the surface. Ø
- Please do not drag and pull your furniture. Ø

ASSEMBLY REQUIREMENTS

- \square Equipment: phillips head screwdriver, flat head screwdriver, hammer
- \square 2 x adults required
- 2m x 2m assembly space required Ø
- 1 hour assembly time approx. V






USING CAM LOCK AND QUICKFIT


QUICKFIT

Tighten quickfit until shoulder is flush with panel. Do not overtighten or undertighten.

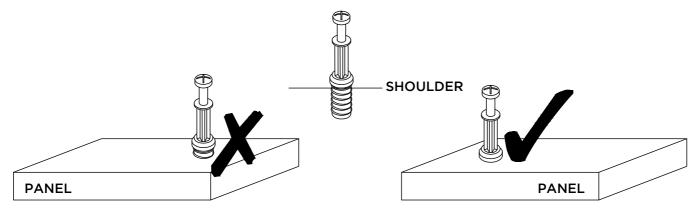


CAM LOCK


When fitting cam lock, ensure starting position is correct before you insert connecting quickfit.

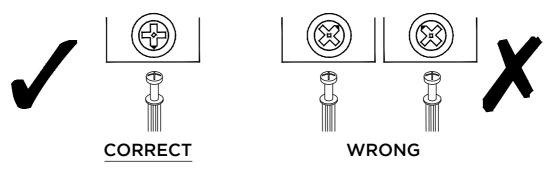

Quickfit head should be in the centre of the cam lock when the two panels are joined. Cam lock should be inserted before quickfit.




Turn cam lock clockwise to tighten.




DRAWER SLIDE GUIDE

Your pack will contain one sets of Metal Drawer Slides. These are bundled together with adhesive tape. The set comprises of 2 components. Undo the tape on one set at a time and separate the parts.

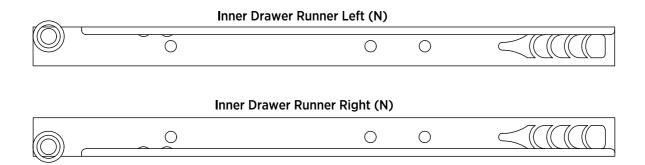

The Drawer Slide components shown above are attached to the **drawer**. They have the letters **NL** or NR stamped on them to indicate left hand or right hand components. Put these parts aside for attaching to the drawer later.

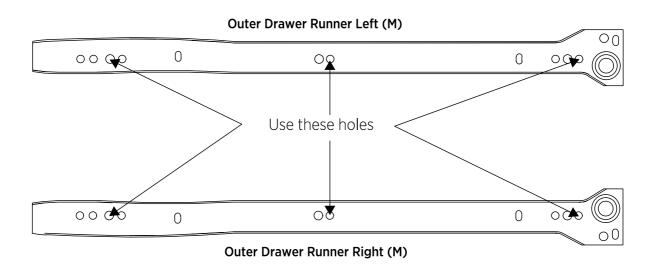


The Drawer Slide components shown above are attached to the **bedside**. They have the letters **ML** or MR stamped on them to indicate left hand or right hand components. You will need these for step 2 and 11.

4 of 19

HARDWARE LIST



PARTS LIST

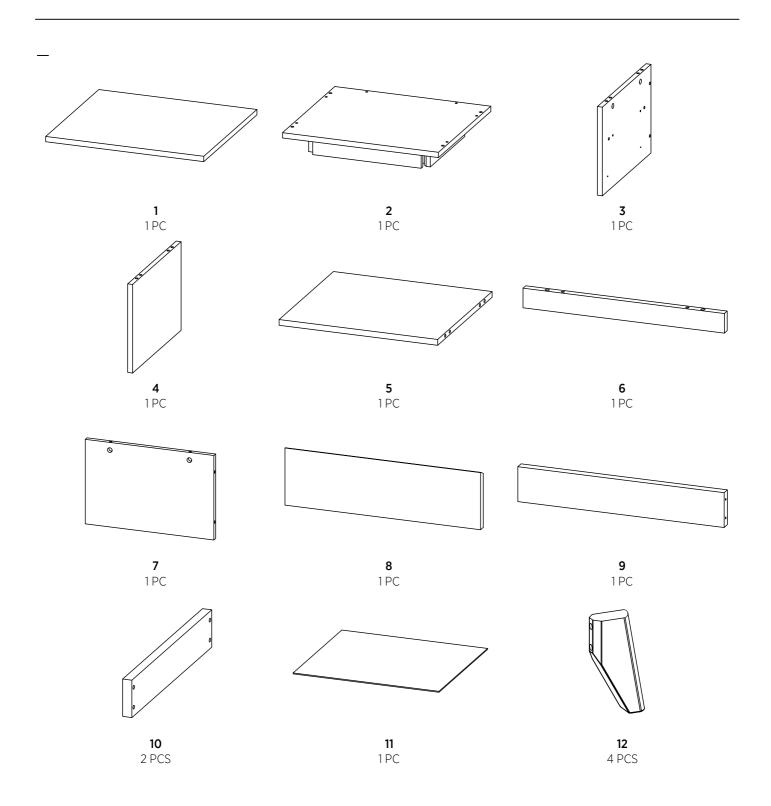

STEP 1


Insert cam locks (A) to part 5 and 7.


and wooden dowels (D) to part 5, 6 and 7.


Insert quickfit screws (B) to parts 1, as shown.









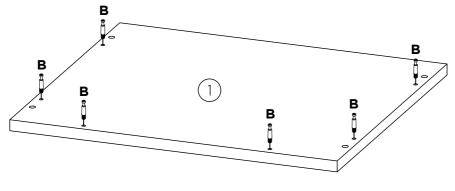

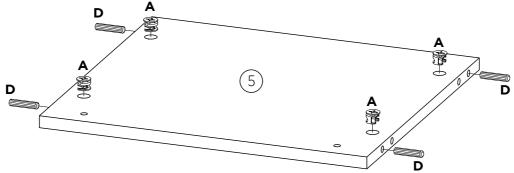

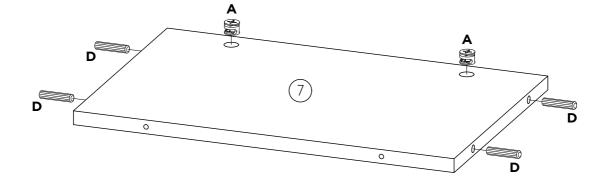

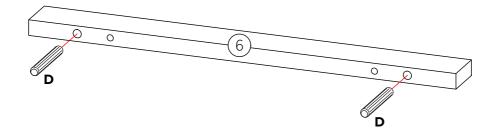

STEP 2


Fix outer drawer runners (M) to parts 3 and 4 using screws (H), as shown.

H x 6

WARNING

The most common cause of drawers being misaligned is at the drawer assembly and runner installation stage. Please ensure all instructions and screw hole positions are followed as indicated to avoid misaligned drawers.



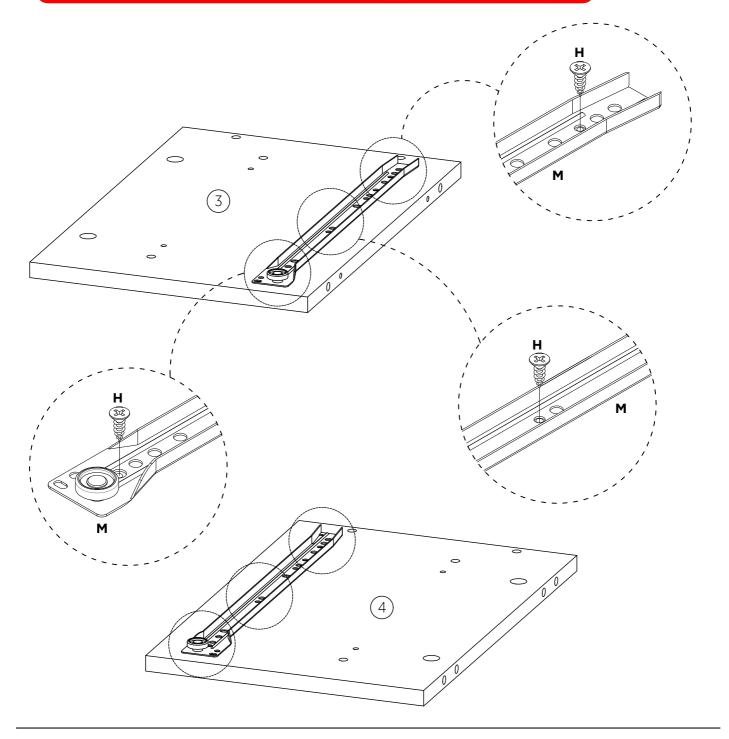

STEP 3


Insert cam locks (A) and wooden dowels (D) to parts 3 and 4.


Insert quickfit screws (B) to parts 3 and 4, as shown.








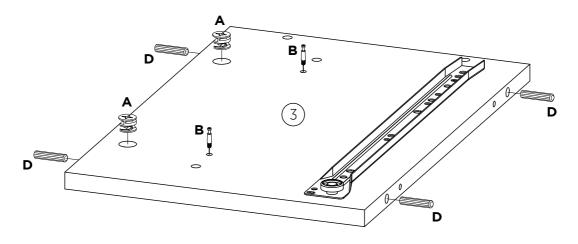


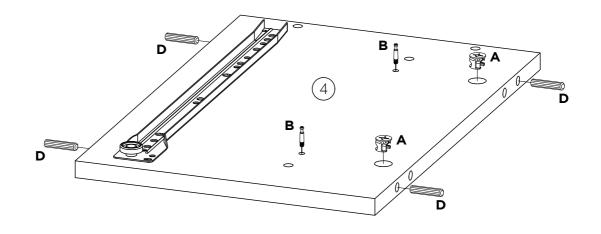


STEP 4

Fix parts 6 to parts 5 using screws (G), as shown.



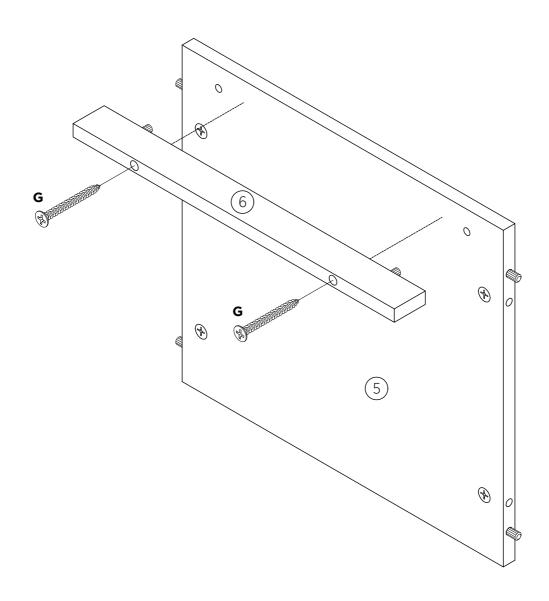

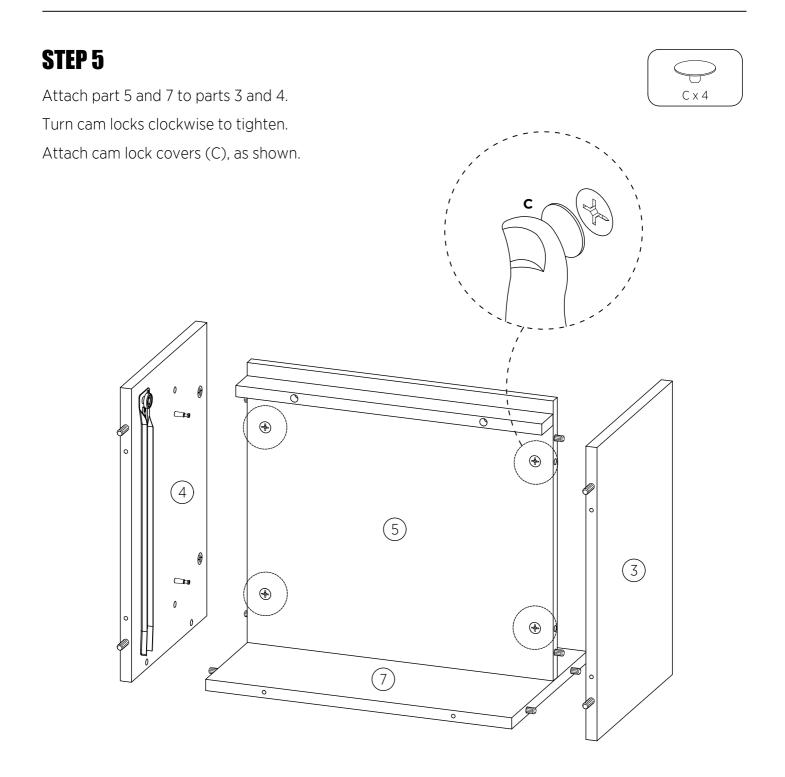



STEP 6

Attach part 1 to parts 3, 4 and 7.

Turn cam locks clockwise to tighten.


Attach cam lock covers (C), as shown.




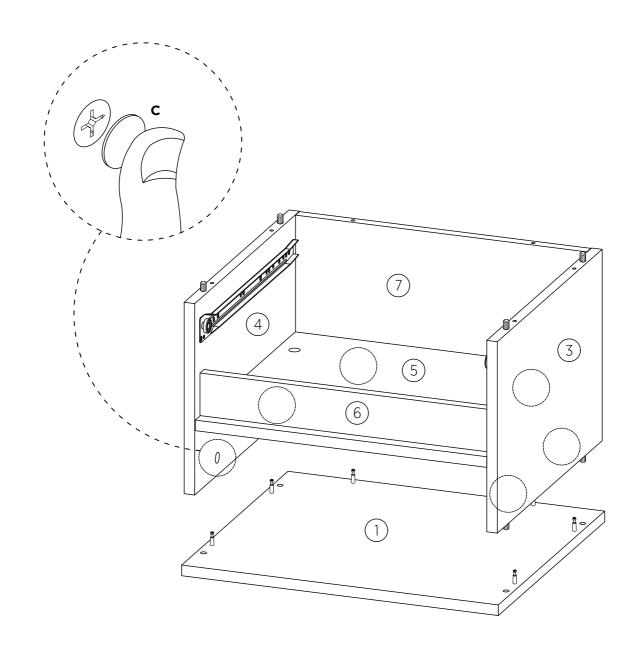


STEP 7

Fix part 2 to parts 3, 4 and 7 using screws (E) and allen key (F), as shown.



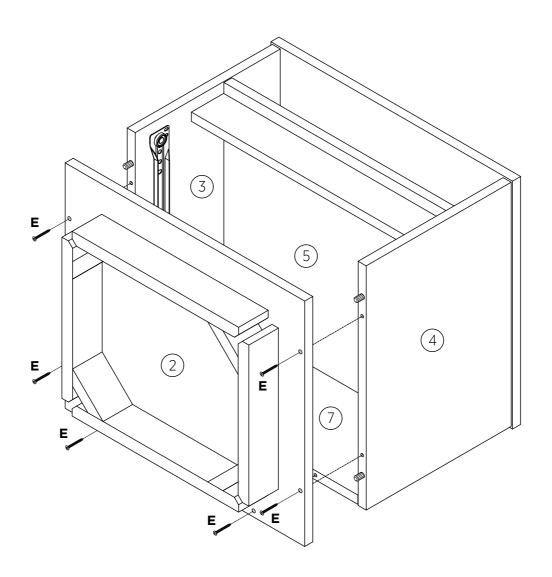


13 of 19

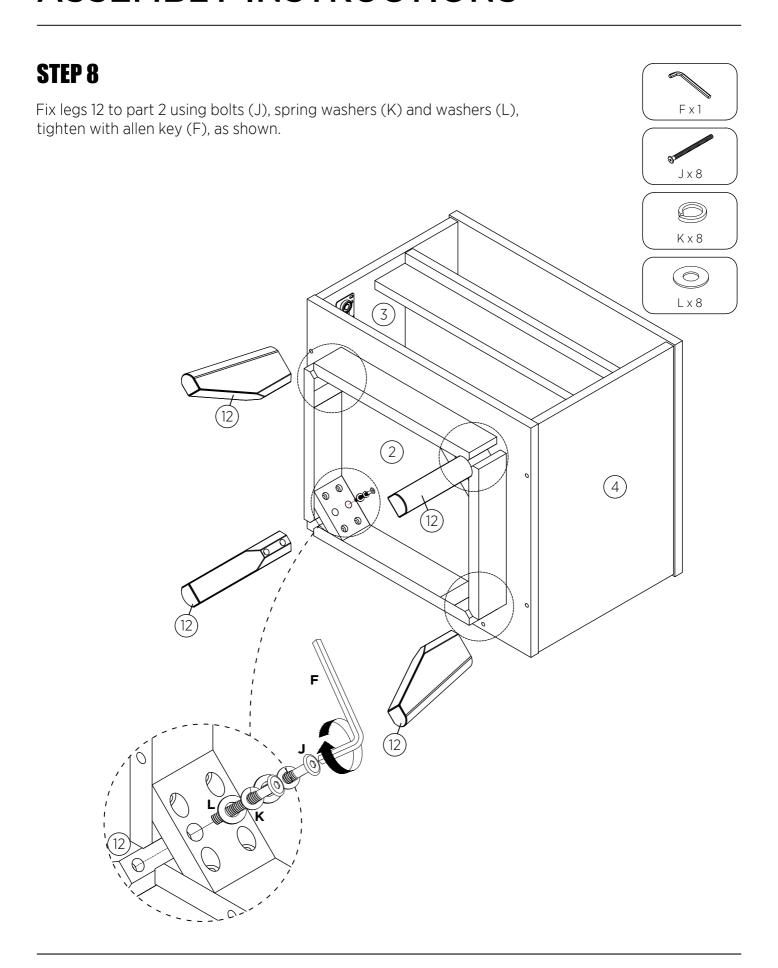

STEP 9

Fix parts 10 to parts 8 and 9 using screws (G), as shown.




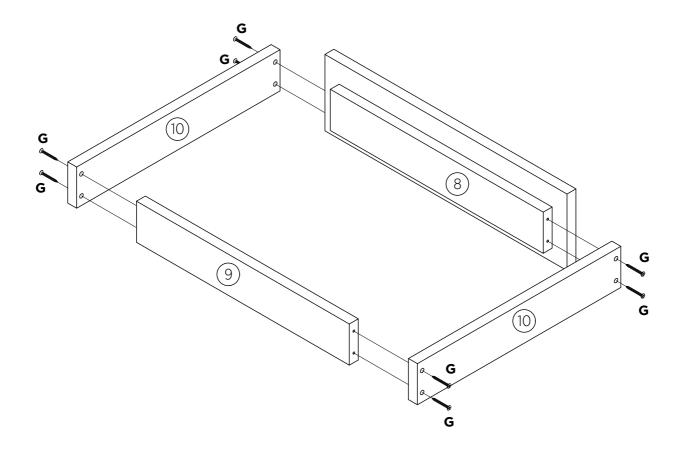

STEP 10

Fix part 11 to parts 8, 9 and 10 using nails (I), as shown.



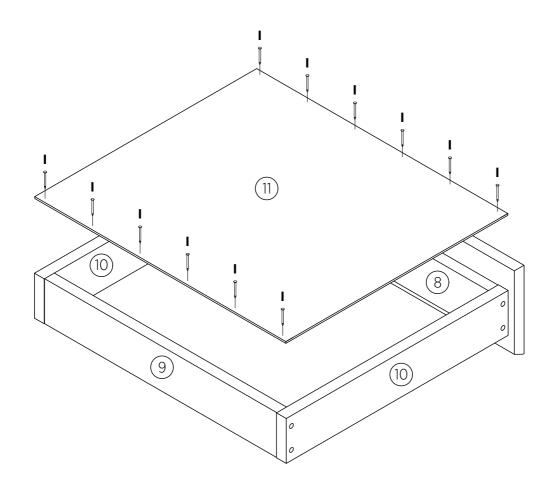

STEP 11


Fix inner drawer runners (N) to part 14 using screws (G), as shown.

Amm H x 6

N x 6


WARNING

The most common cause of drawers being misaligned is at the drawer assembly and runner installation stage. Please ensure all instructions and screw hole positions are followed as indicated to avoid misaligned drawers.

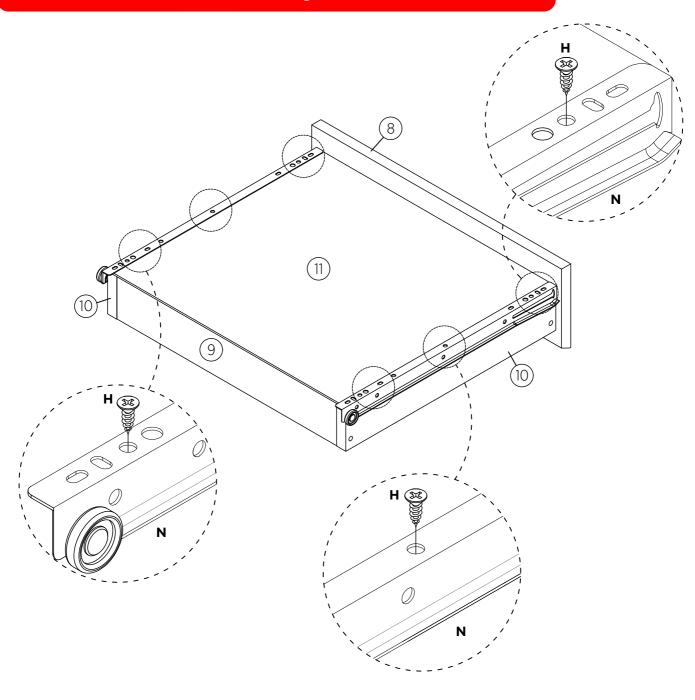

STEP 12

Fit drawer to assembled unit, as shown.

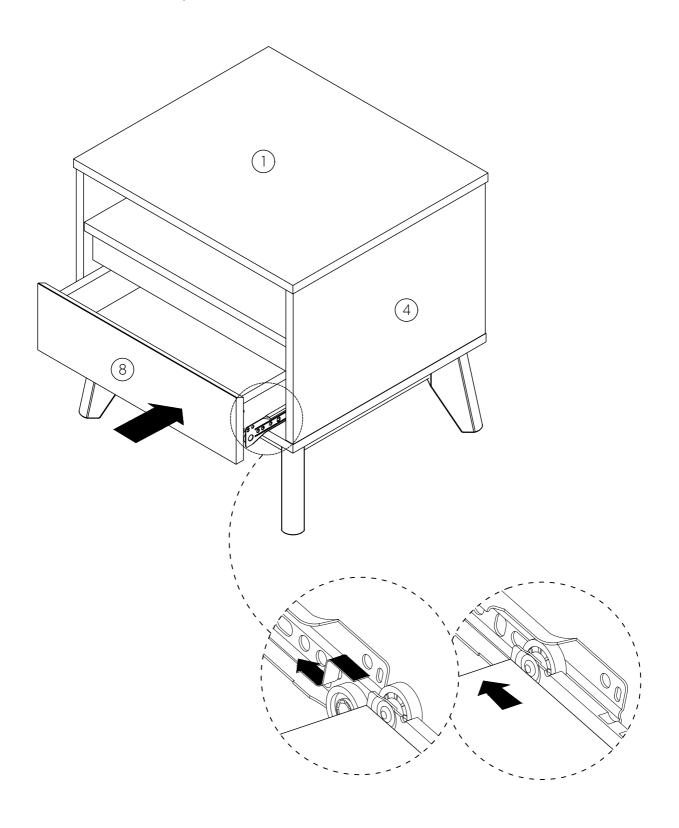

18 of 19

STEP 13

Fix part 14 to part 11 and 12 using nails (I), as shown.



Maximum recommended weight is 10 kg on top, 5 kg on each shelf and each drawers.

Your product is ready for use.