









ATTIC GROUP

STAIRLADDER DELUXE

INSTALLATION KIT


	x12 Hex head coach screws		x 1 Wooden pole with plastic hook (+1 spare)
	x 2 Rubber feet for ladder, & screws		x 1 Installation Instructions
	x 1 Oil bottle for maintenance purposes		x 1 Allen key for adjustments
	x 1 Upper exit handrail		x4 nuts and bolts

IMPORTANT NOTICE

WARRANTY COULD BE VOIDED IF COACH SCREWS PROVIDED HAVE NOT BEEN USED TO INSTALL LADDER

INSTALLATION INSTRUCTIONS

1

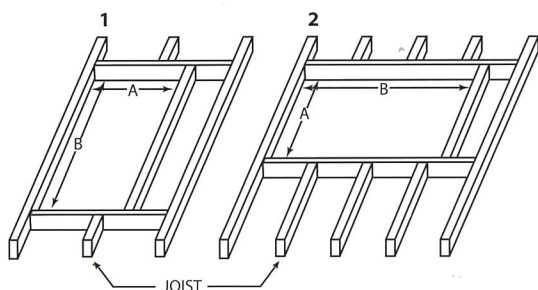


SELECTING THE LOCATION

Inspect area above ceiling:

- Make sure that there are no obstructions in the roof, such as electrical wiring, pipes and hot water service, major beams etc.
- Check that the beams/joists run square with walls below. SEE FIGURES 1 & 2
- DO NOT CUT TRUSSES

2

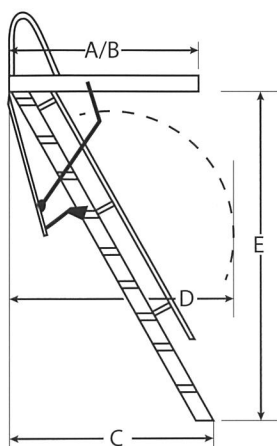

Capacity 410kg spread weight

E = Height ceiling

A/B = Opening

C = Standout

D = Foldout


NB: Height E = Floor to underside of ceiling

MODEL	E Floor to ceiling	A/B Opening	C Standout	D Foldout
M259	up to 2.59m	700 x 1195mm	1150mm	1700mm
M270	2.60 - 2.70m	700 x 1195mm	1600mm	1850mm
M300	2.70 - 3.00m	700 x 1295mm	1850mm	2000mm
M320	3.00 - 3.20m	700 x 1440mm	1950mm	2050mm
M350	3.30 - 3.50m	700 x 1440mm	1970mm	2100mm

ATTIC STAIRLADDER DELUXE GROUP


INSTALLATION INSTRUCTIONS

3

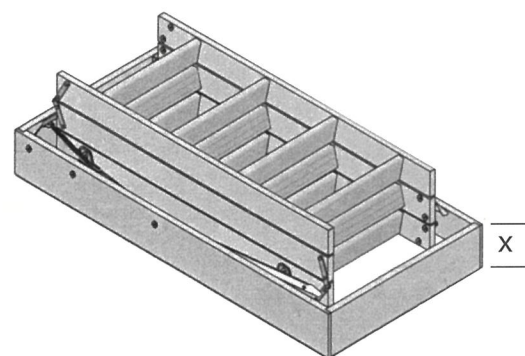


Firstly measure the depth (x) of the ladder box frame (exclude the depth of the ceiling panel). Mark several lines around the inside of the ceiling opening where the top level of the ladder box frame should be positioned for the permanent fixing.

4

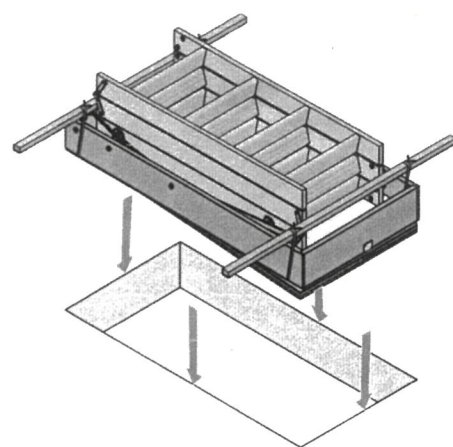

Tie rods temporarily to the ladder box before lowering into ceiling opening. Optional installation brackets may be used.


5

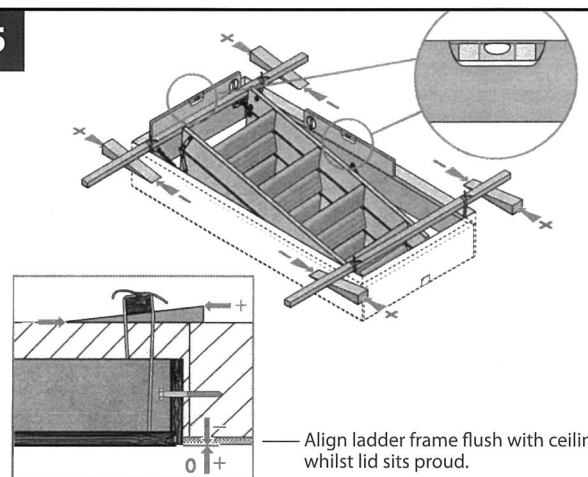

Align ladder frame flush with ceiling, whilst lid sits proud.


Square and adjust the ladder into position.

6

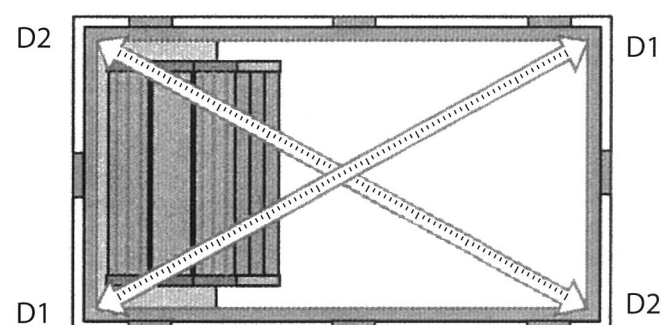


Check the ladder frame is square by measuring the two diagonal measures to ensure they are equal. (D1 = D2)

7

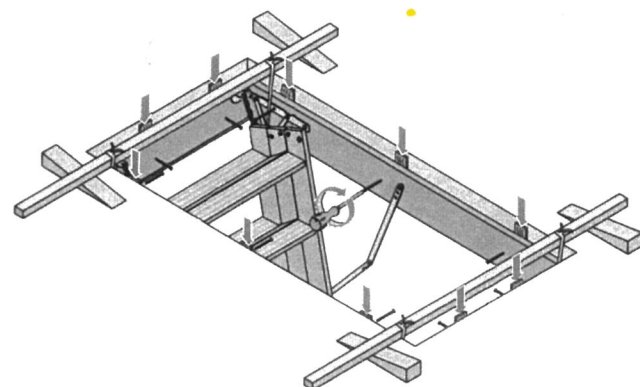

Using the coach screws provided fasten through frame at positions indicated.

8

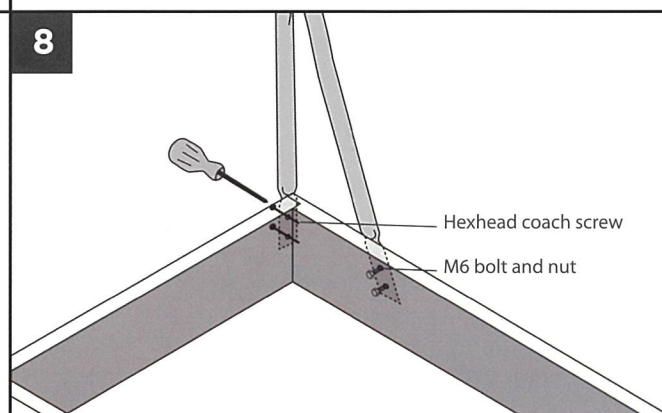


Bolt ceiling handrail to external side of ladder box using one fixing bolt only (Through the hole closest to the end of the tube flattened section). Recheck you have the ladder falling in the correct direction.

ATTIC STAIRLADDER DELUXE GROUP


INSTALLATION INSTRUCTIONS

9

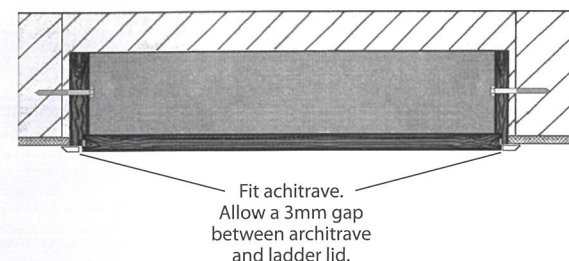


Add architrave surround to finish ceiling edge.

10

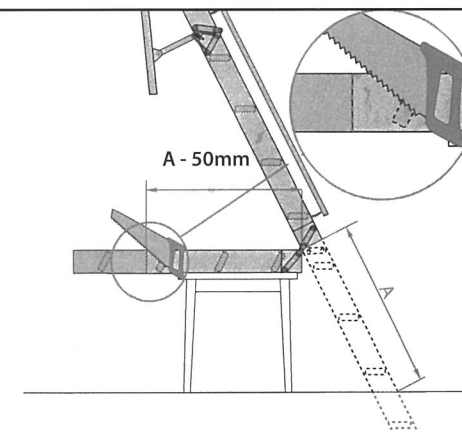


TRIMMING LADDER LEGS: Measure distance A as shown. Measure both sides as ceiling to floor height may vary. Deduct 50mm to allow for rubber feet.

11

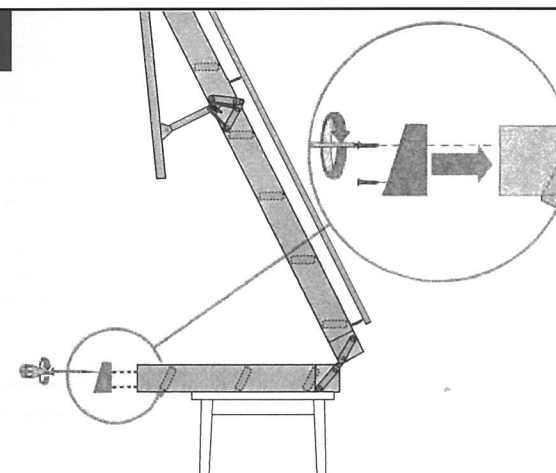


Fit rubber feet as shown.

12

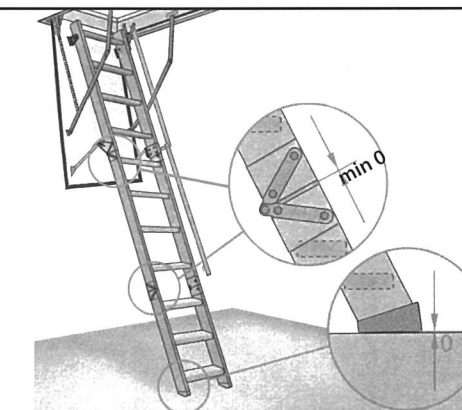

It is extremely important that you do not trim the legs too short. The ladder legs must sit flush with the floor with no gaps between the hinged sections when fully extended.

MAINTENANCE INSTRUCTIONS

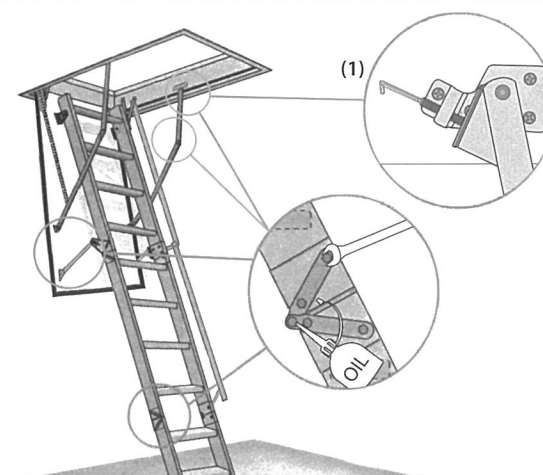


To maintain and extend the life of your ladder:

- Check all nuts, bolts and fastenings for tightness every 50 operations.
- Your installer will have correctly adjusted your ladder however,
 - the allen screws on the arms can be used to adjust the lid and ladder opening angle. Allen screw normally stored at 1.
 - Spring tension is adjustable by moving the springs up or down on the brackets at the rear of your ladder.
- Apply light machine oil (sewing machine oil) to all moving parts.
- **Do not** use kerosene based oil sprays (such as WD40)


Important:

Do not allow the lid of your ladder to slam as this may cause damage and void your warranty


USAGE AND SAFETY INSTRUCTIONS

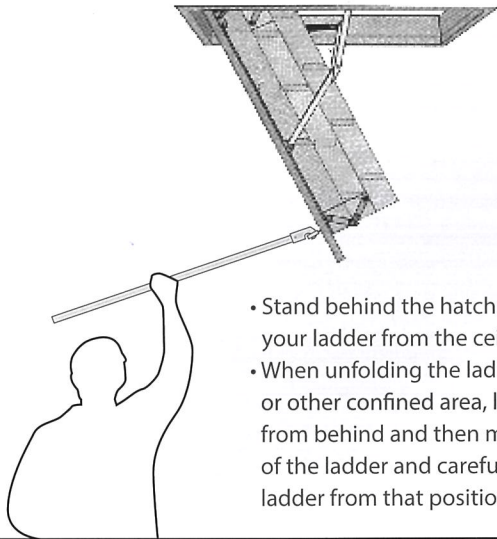

- Stand behind the hatch when lowering your ladder from the ceiling.
- When unfolding the ladder in a hallway or other confined area, lower the hatch from behind and then move to the front of the ladder and carefully unfold the ladder from that position.

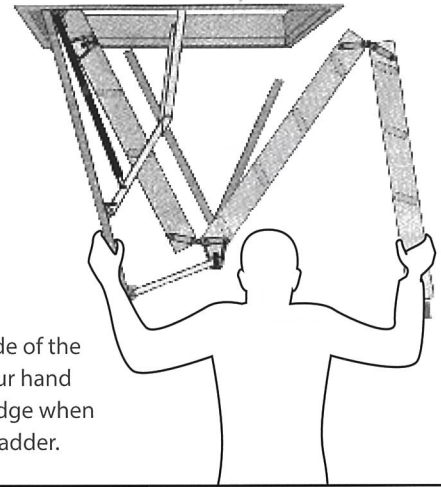


- Stand at the side of the ladder with your hand on the hatch edge when unfolding the ladder.

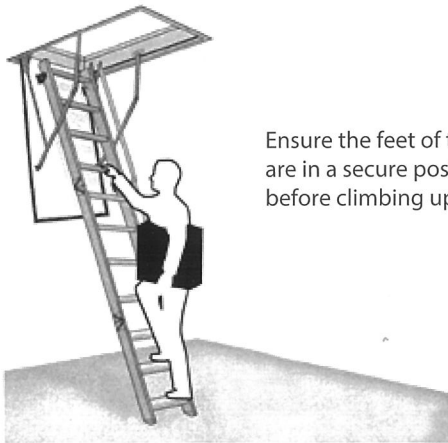

Ensure the feet of the ladder are in a secure position before climbing up

Always face the ladder while climbing up or down.

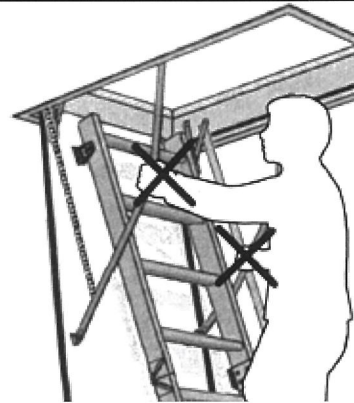

Do not use the ladder arm as a hold while climbing the ladder. Use the ladder hand rail to increase your stability wherever possible.

CALL OR VISIT ONLINE
1300 655 525
www.atticgroup.com.au

ATTIC GROUP