




WHISPER DC

LOW PROFILE

WHISPER LOW PROFILE DC

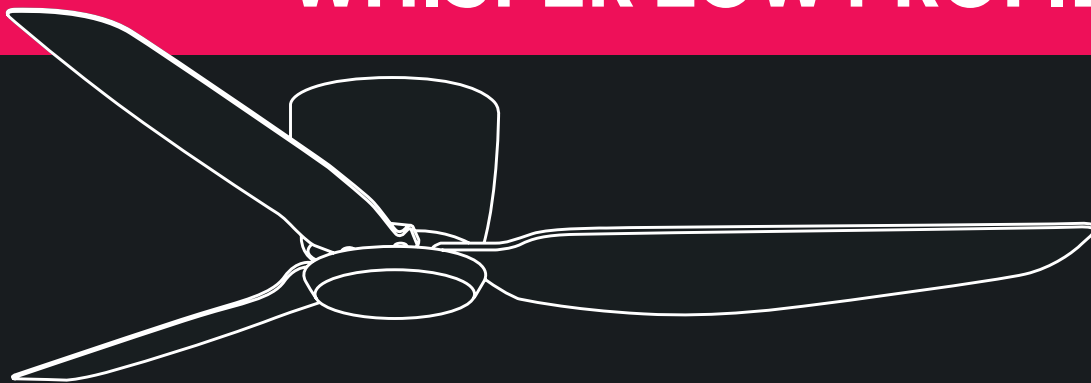


**4 YEAR
MOTOR
WARRANTY**
1 YEAR IN HOME

**3 YEAR MOTOR
REPLACEMENT***
*Upon Product Registration

NO LIGHT

- C5000/101C** - 44" (112cm) White
C5000/124C - 44" (112cm) White/Light Oak
C5020/101C - 52" (132cm) White
C5020/124C - 52" (132cm) White/Light Oak

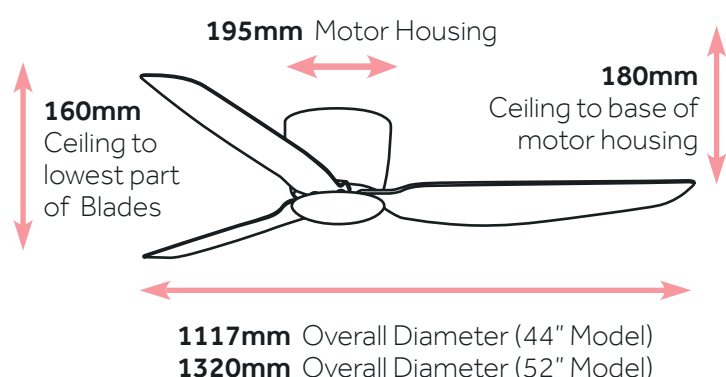

SPECIFICATIONS:


- Suitable for indoor use ONLY
- Suitable for flat ceilings ONLY
- Reversible for winter use
- Includes remote control - 6 selectable speeds
- Energy saving DC motor
- High quality lightweight ABS plastic blades
- Quiet operation
- 1Hr/4Hr/8Hr Timer settings
- Blade Pitch 12°
- Available with/without dimmable CRI 90 CCT LED light

PERFORMANCE DATA 44" MODEL:

Speed	Power (Watts)	RPM	Airflow
1 - Low	0.8	60	2,067 m³/hr
2	2.1	101	3,480 m³/hr
3	4.3	141	4,559 m³/hr
4	9.5	181	5,877 m³/hr
5	17.5	220	6,850 m³/hr
6 - High	30.0	261	8,071 m³/hr

DIMMABLE CCT LED LIGHT

- C5001/101C** - 44" (112cm) White
C5001/124C - 44" (112cm) White/Light Oak
C5021/101C - 52" (132cm) White
C5021/124C - 52" (132cm) White/Light Oak

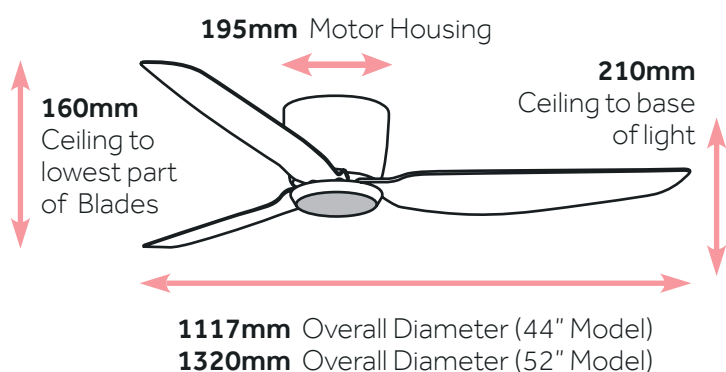

PERFORMANCE DATA 52" MODEL:

Speed	Power (Watts)	RPM	Airflow
1 - Low	1.3	67	3,220 m³/hr
2	3.7	107	5,361 m³/hr
3	7.8	135	6,142 m³/hr
4	13.7	160	6,690 m³/hr
5	21.5	188	7,630 m³/hr
6 - High	30.0	211	8,950 m³/hr

ACCESSORIES

REPLACEABLE CCT LED LIGHT:

User replaceable LED light module, available to purchase if required or if you just want to have a spare!

CLSP13-FM009 Replaceable CCT LED

CCT LED LIGHT DATA:

Color rendering index: - CRI90

Colour Temp	Power (Watts)	Max Lumen's
3000k	20	2102 lm
4000k	20	1959 lm
6000k	20	1956 lm