



PARTS LIST

No.	Description	Qty
A	Care handle	1
B	Grub screw	1
C	Allen key	1

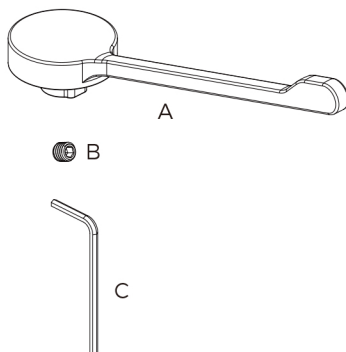


PLUMBERS INSTALLATION INSTRUCTIONS

Disassembly

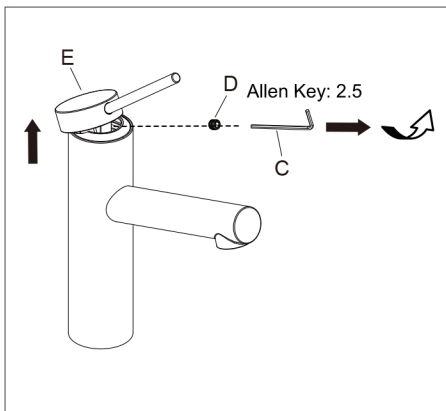

Assembly

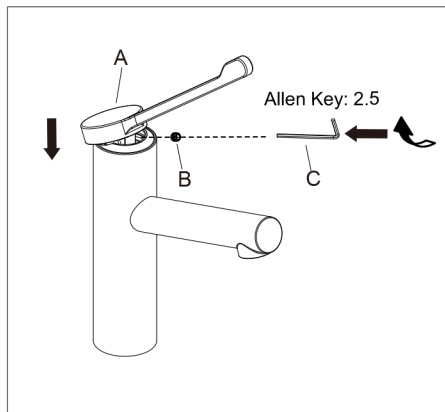

Replacing Handle

Disassembly: Using a 2.5mm allen key (C) to loosen grub screw (D) and remove handle (E).

Assembly: Fit new handle (A), taking care that it is pushed fully onto cartridge stem, and use a 2.5mm allen key (C) to lock the grub screw (B) tightly.