


H2 MODEL Electric or Non-heated

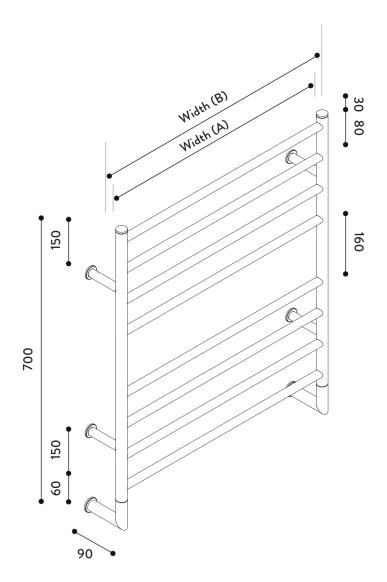

SPECIFICATIONS

Height

700mm + Hardwire

Width Options

400, 500, 600, 700, 800mm

Tube Diameter

Vertical 25mm / Horizontal 19mm

Safety Rating

IPX5 (allows for installation in zone 1 & 2 of bathrooms)

Finishes

Electroplate / Powder Coat

Output

70 - 200 Watt

Materials

Copper tube with brass fittings

Standards

AS/NZS:3350

KEY FEATURES

Replaceable Element

Heating element easily replaced

Copper Tube

Ensures ultimate thermal conductivity and radiant heat

Efficient Design

Additional clustered bars provide enhanced heat transfer, ideal for drying and warming towels.

Subject to sizing, can be used to provide ambient heat

VARIATIONS

Electric	Height	Width (A)	Width (B)	Chrome Wattage	P/Coat Wattage
H2/400	700 mm	400mm	440mm	70 Watts	100 Watts
H2/500	700 mm	500mm	540mm	100 Watts	150 Watts
H2/600	700 mm	600mm	640mm	100 Watts	150 Watts
H2/700	700 mm	700mm	740mm	150 Watts	200 Watts
H2/800	700 mm	800mm	840mm	150 Watts	200 Watts





