


## H3 MODEL Electric or Non-heated

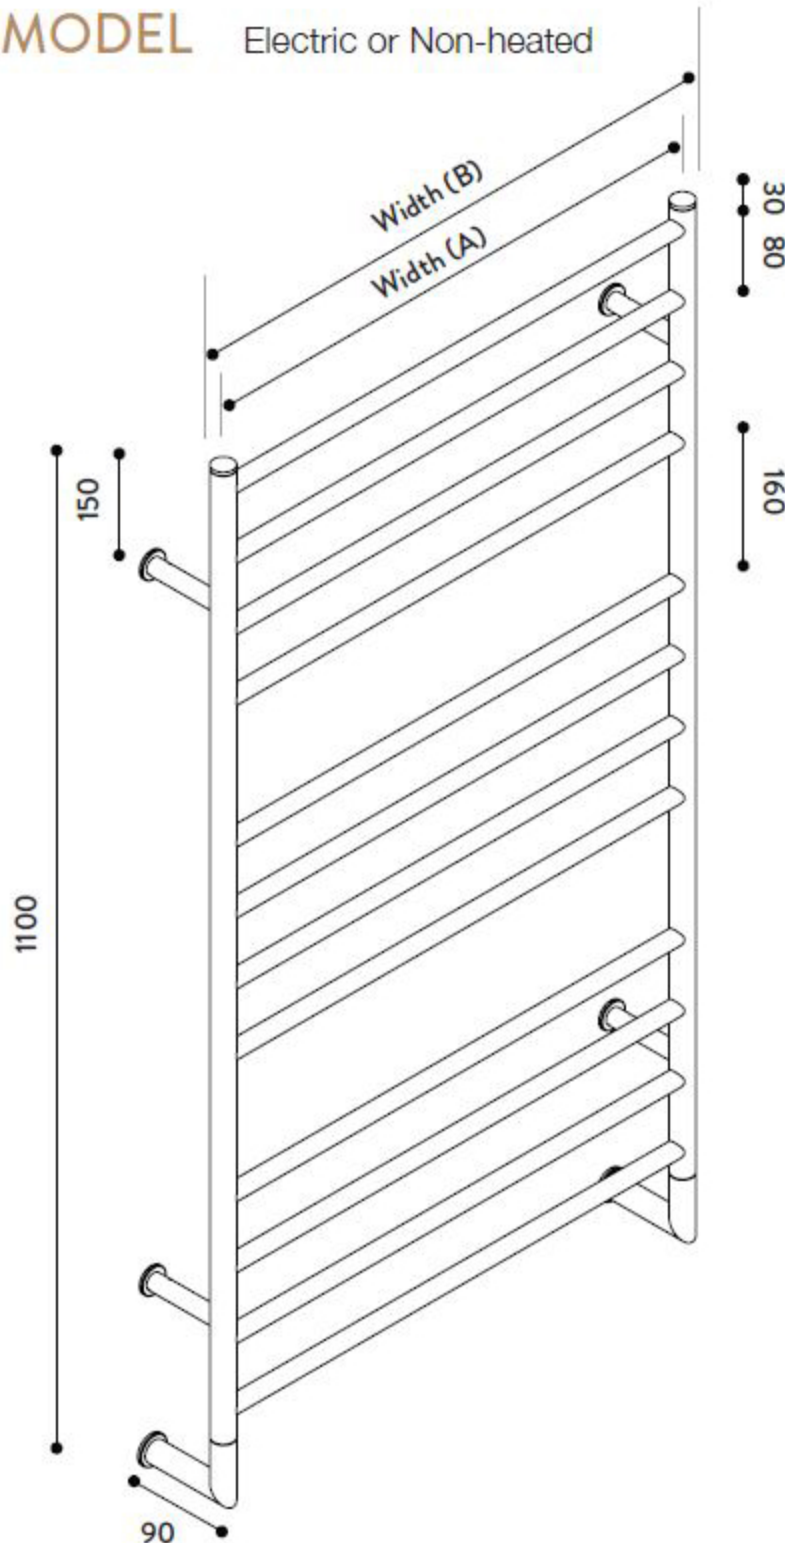

## SPECIFICATIONS

### Height

1100mm + Hardwire

### Width Options

400, 500, 600, 700, 800mm

### Tube Diameter

Vertical 25mm / Horizontal 19mm

### Safety Rating

IPX5 (allows for installation in zone 1 & 2 of bathrooms)

### Finishes

Electroplate / Powder Coat

### Output

100 - 250 Watt

### Materials

Copper tube with brass fittings

### Standards

AS/NZS:3350

## KEY FEATURES

### Replaceable Element

Heating element easily replaced

### Copper Tube

Ensures ultimate thermal conductivity and radiant heat

### Efficient Design

Additional clustered bars provide enhanced heat transfer, ideal for drying and warming towels.

Subject to sizing, can be used to provide ambient heat

## VARIATIONS

Electric	Height	Width (A)	Width (B)	Chrome Wattage	P/Coat Wattage
H3/400	1100mm	400mm	440mm	150 Watts	200 Watts
H3/500	1100mm	500mm	540mm	150 Watts	200 Watts
H3/600	1100mm	600mm	640mm	150 Watts	200 Watts
H3/700	1100mm	700mm	740mm	200 Watts	250 Watts
H3/800	1100mm	800mm	840mm	200 Watts	250 Watts