
















Cat treadmill 3.0 installation instructions


Hint: Do not tighten the mounting screws to the end at one time, and tighten them again after a single component is installed and formed!



Installation steps

Install embedded screw tube



STEP 1

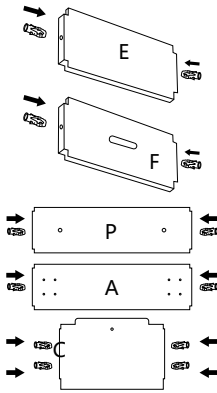

Insert the M yellow plastic screws into the holes at both ends of the assembly A P C E F in sequence

Install the bottom


STEP 2

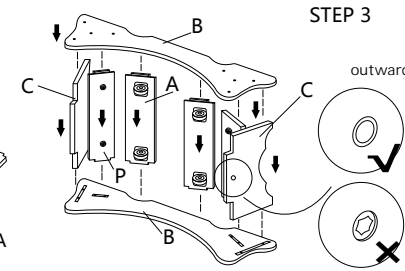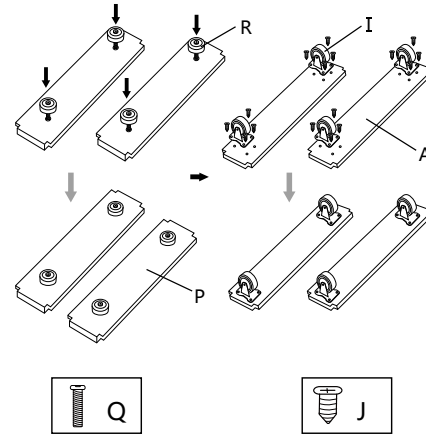


STEP 3

Insert the fixing screws first, then install the other side to fix it, and then install the other side to fix it.


put F at radom palce




STEP 4



STEP 5




STEP 6




STEP 7

repeat step 4 5 6 again


STEP 8

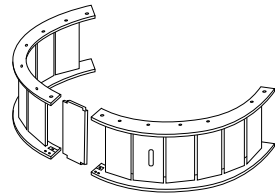

STEP 9

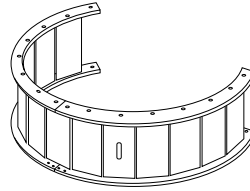

STEP 10

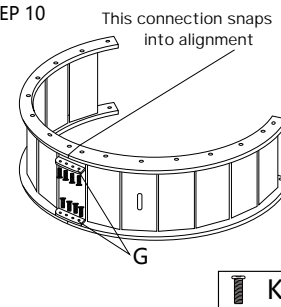


This connection snaps into alignment




Running wheel installation


STEP 11

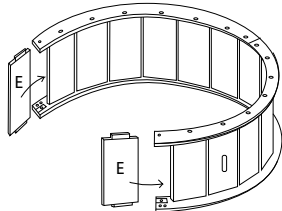


STEP 12

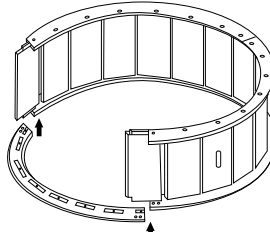

STEP 13

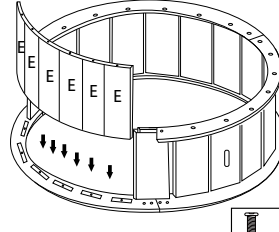


STEP 19

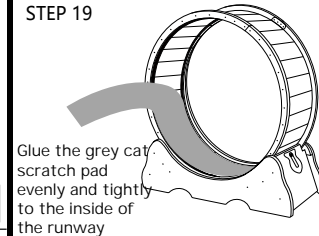

Glue the grey cat scratch pad evenly and tightly to the inside of the runway


STEP 18

Stick one slaways

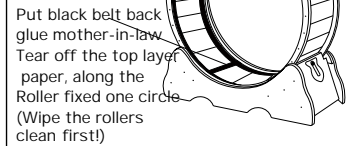


Put black belt back glue mother-in-law. Tear off the top layer paper, along the Roller fixed one circle (Wipe the rollers clean first!)

STEP 20




Finished


STEP 14

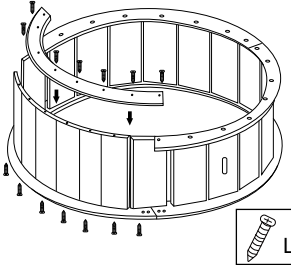

STEP 15


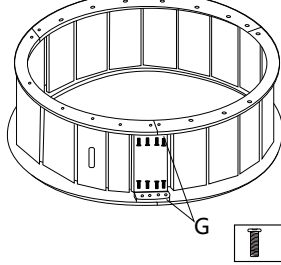


STEP 16

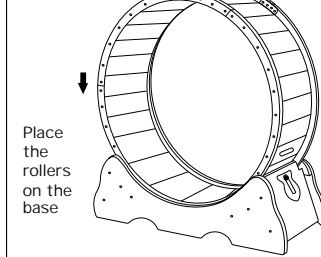

Place the rollers on the base

Lock it when not in use



H wooden lock is inserted into the card slot and locked