




GARDEN SHED

MODEL: GS-6X8-GY

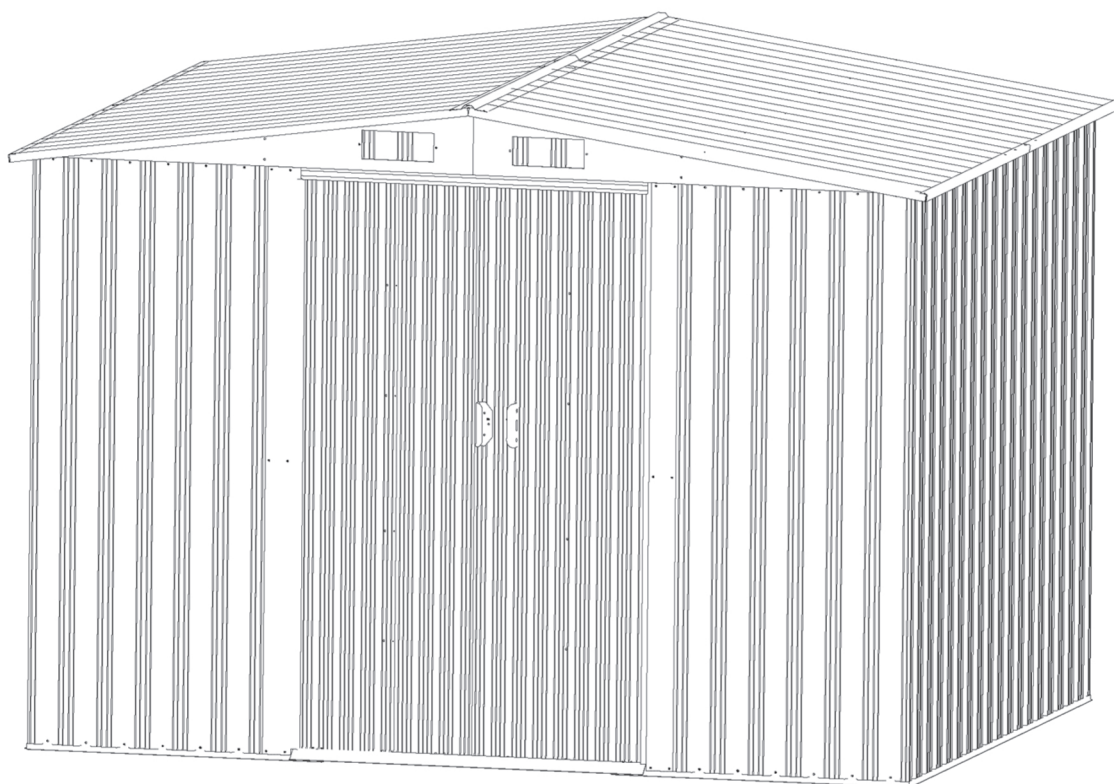

ASSEMBLY INSTRUCTIONS

- Please read these instructions carefully before starting assembly.
- Assembly must be done strictly in accordance with these instructions
- Please check to ensure that all parts are included in the packaging.
- To avoid injury, please use work gloves to perform the assembly.
- It is recommended that assembly be done by two persons.
- Assembly duration is about 2 to 3 hours.

BEFORE ASSEMBLY

Assembly instructions

Before starting assembly, check local building codes regarding footings, locations and other requirements. Study and understand these assembly instructions. Important information and helpful tips will make your assembly easier and more hassle-free. This manual contains all the appropriate information for assembling your product. Review all instructions before you begin and during assembly. Follow the sequence carefully for correct results.

Parts and Parts list

Check the list for all necessary parts. Separate the contents by part number when reviewing the parts list. The first few steps will show how to join related parts to make larger sub assemblies that will be used later. Familiarise yourself with the hardware and fasteners for easier use during assembly. Extra fasteners are provided for your convenience.

PLAN AHEAD

Check weather

Be sure that the day you select to assemble the shed is dry and calm. Do not attempt to assemble the shed on a windy day. Be careful on wet or muddy ground.

Teamwork

Whenever possible, two or more persons should work together to assemble the shed. One person can position parts or panels while the other is able to handle the fasteners and tools.

Tools and materials

There are some basic tools and materials needed for the assembly. Decide which method of anchoring and the type of foundation you wish to use in order to form a complete list materials that you will need.

CARE AND MAINTENANCE

Finish

For long-lasting finish, periodically clean and wax the exterior surface. Touch up scratches as soon as you notice them. Immediately clean the area with a wire brush. Then wash it and apply touch-up paint as per the paint manufacturer's recommendations.

Doors and roof

Always keep the door tracks clear of dirt and other debris that prevent them from sliding easily. Lubricate door tracks annually with furniture polish or silicone spray. Keep doors closed and locked to prevent wind damage. Keep the roof clear of leaves and debris with a long-handle, soft-bristle broom.

Fasteners

Use all washers supplied to protect against weather infiltration and protect the metal from being scratched by screws. Regularly check the shed for loose screws, bolts and nuts and re-tighten as necessary.

Moisture

A plastic sheet (vapour barrier) placed under the entire floor area with good ventilation will help to reduce condensation.


















Attention

















Do not store swimming pool chemicals in the shed. Combustibles and corrosive solvents must be stored in air-tight approved containers.














Tips

Wash off inked part numbers on coated panels with soap and water. Silicone caulking may be used for watertight seals throughout the shed.


PARTS LIST

PART	NO	QTY
	1	2
	2	2
	3L	1
	3R	1
	4L	1
	4R	1
	5	1
	6	1
	7	1
	8	1
	9	2
	11	2
	10L	1
	10R	1
	13	4
	14	4
	15	2

PART	NO	QTY
	16	2
	17	2
	18	2
	19	2
	20	4
	21L	2
	21R	2
	25L	1
	25R	1
	27	2
	P1	2
	P2	4
	P3	12
	P4	2
	P5	4
	P6	4

PART	NO	QTY
	P7	2
	D1	1
	D2	1
	B1	8
	G2	4
	GB	2
	GC	4
	GD	4
	GE	2
	GF	4
	F1	320
	F2S2	95
	F3	8


PARTS

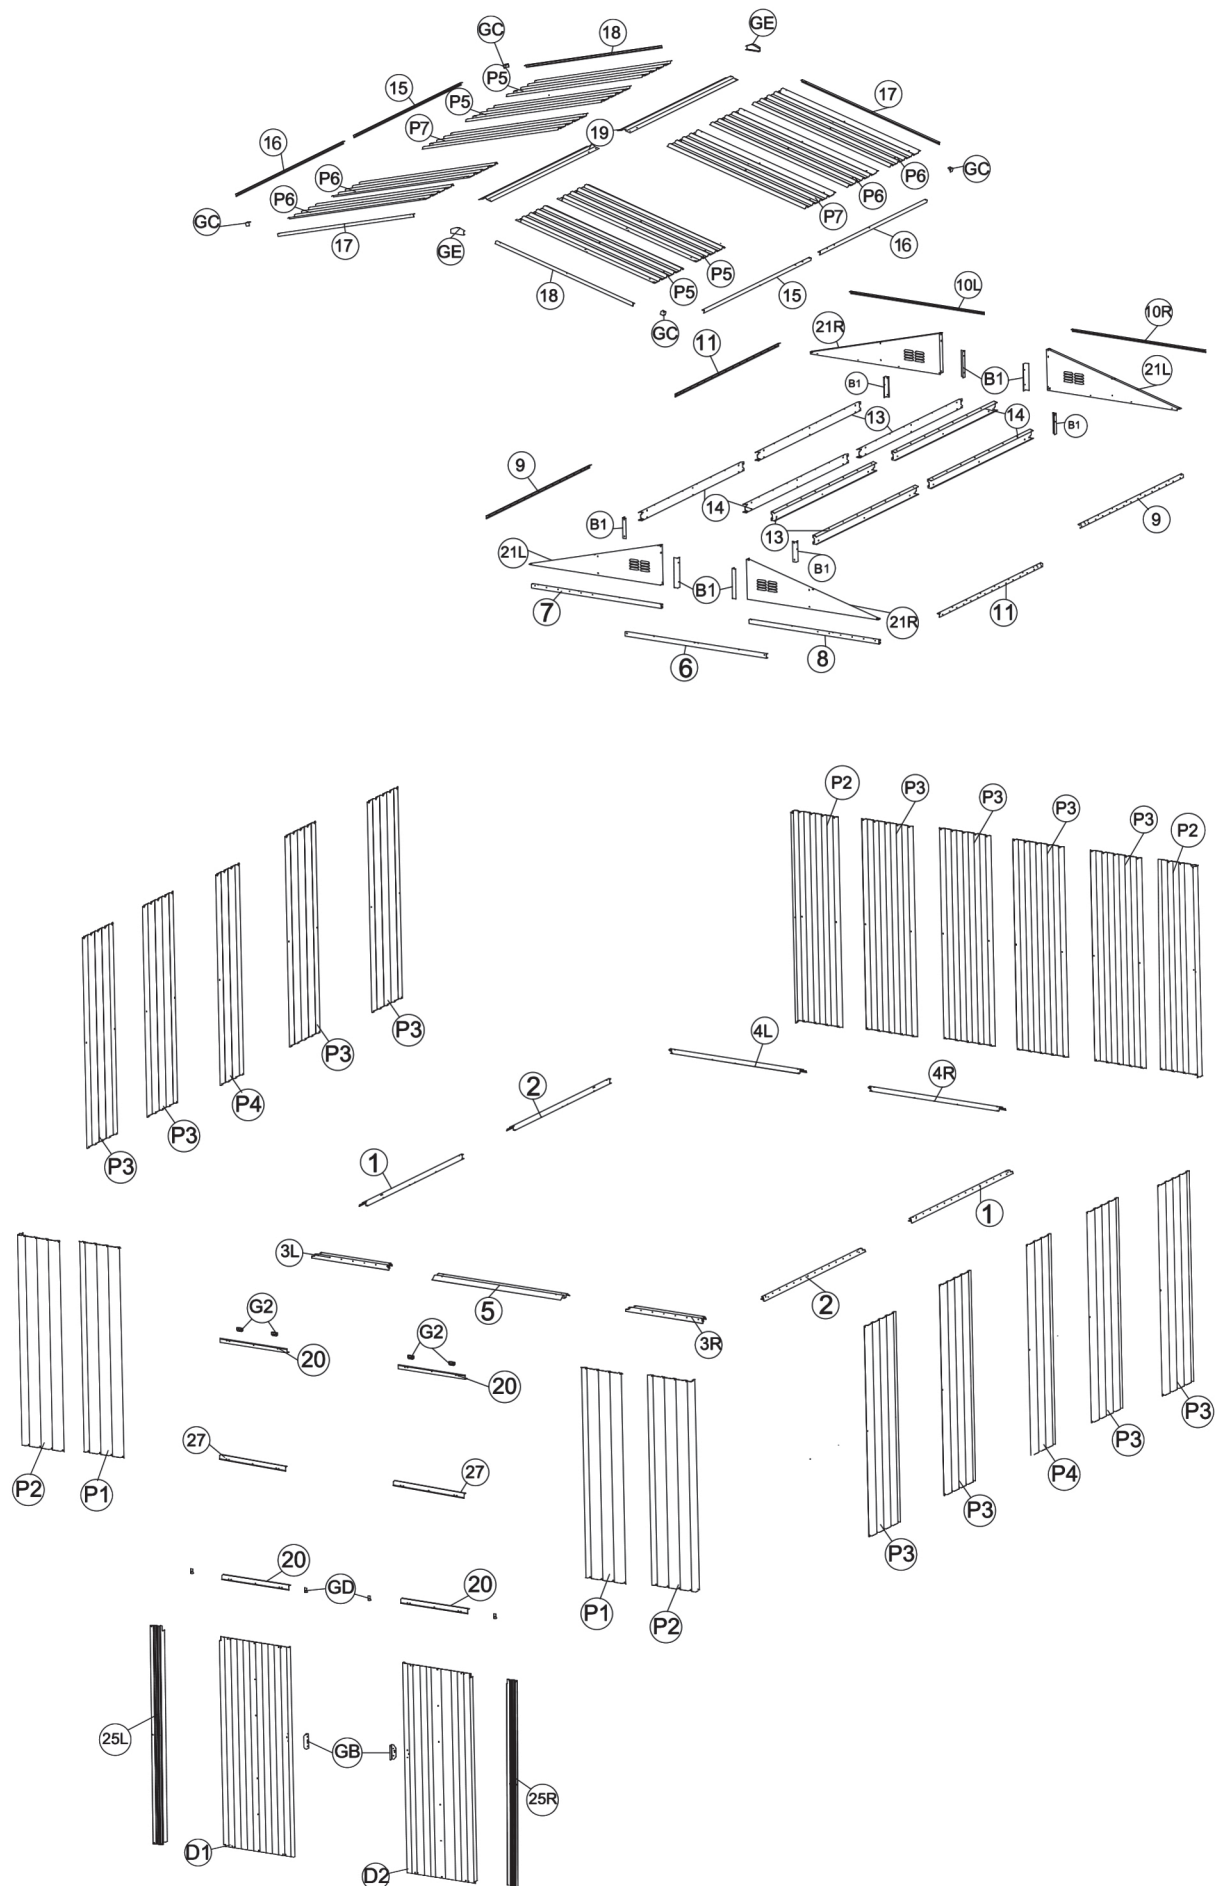







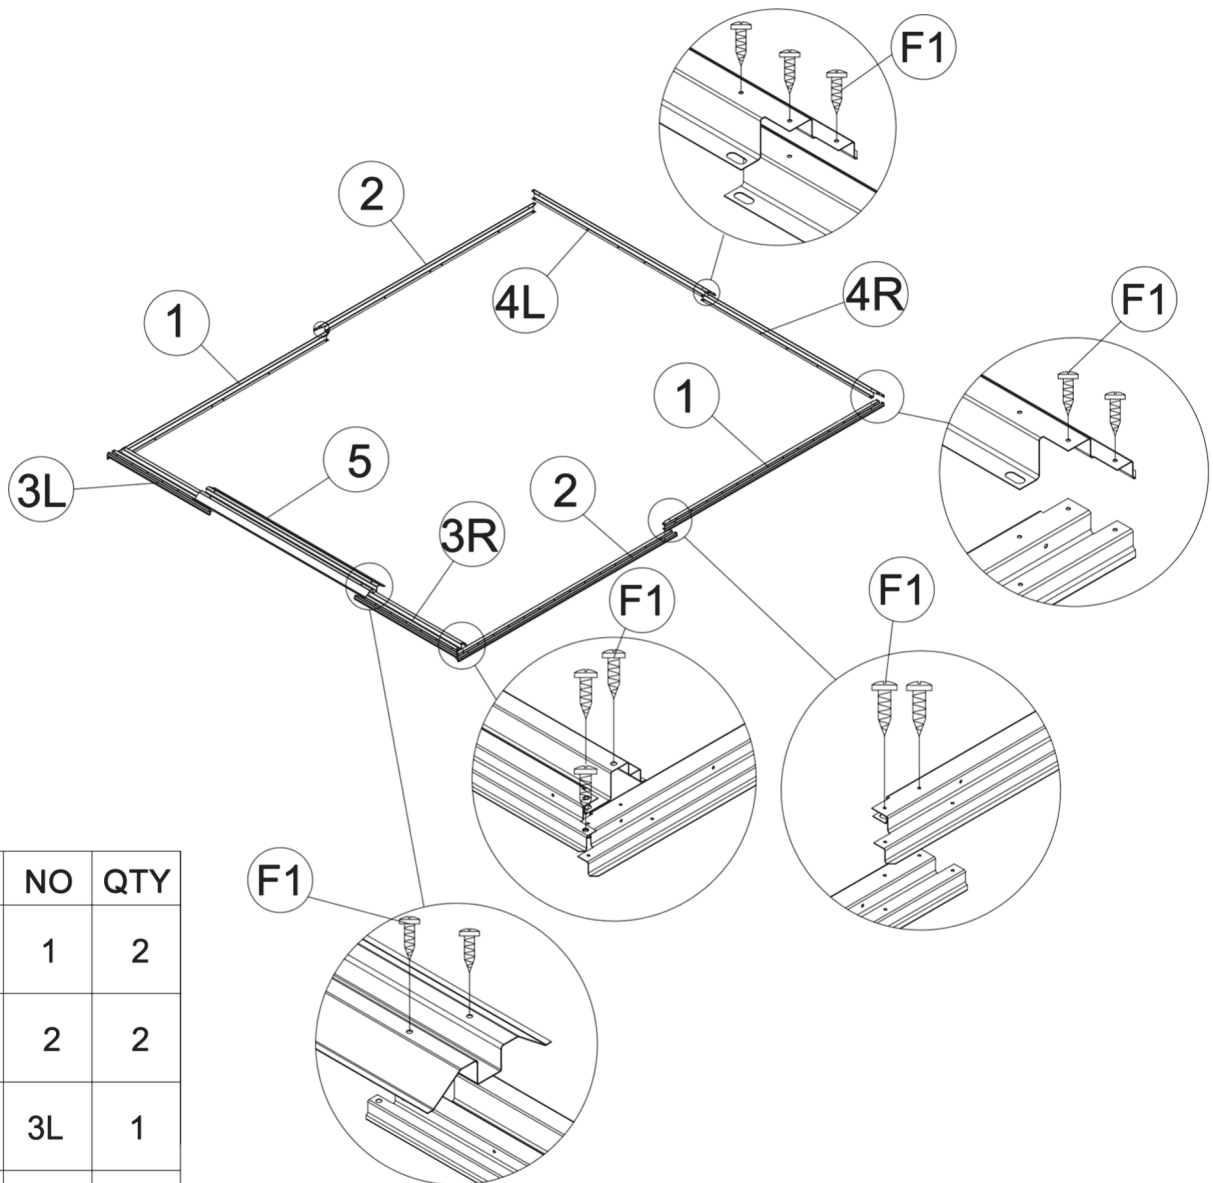

1

Assemble the base bars (1 to 4L) with screws F1. Next, place the entrance taper channel (5) on top of the bars (3L and 3R). Secure with screws F1 to the base as shown. Ensure that the base bar assembly is a perfect rectangle.


NOTE: Beware of sharp edges.







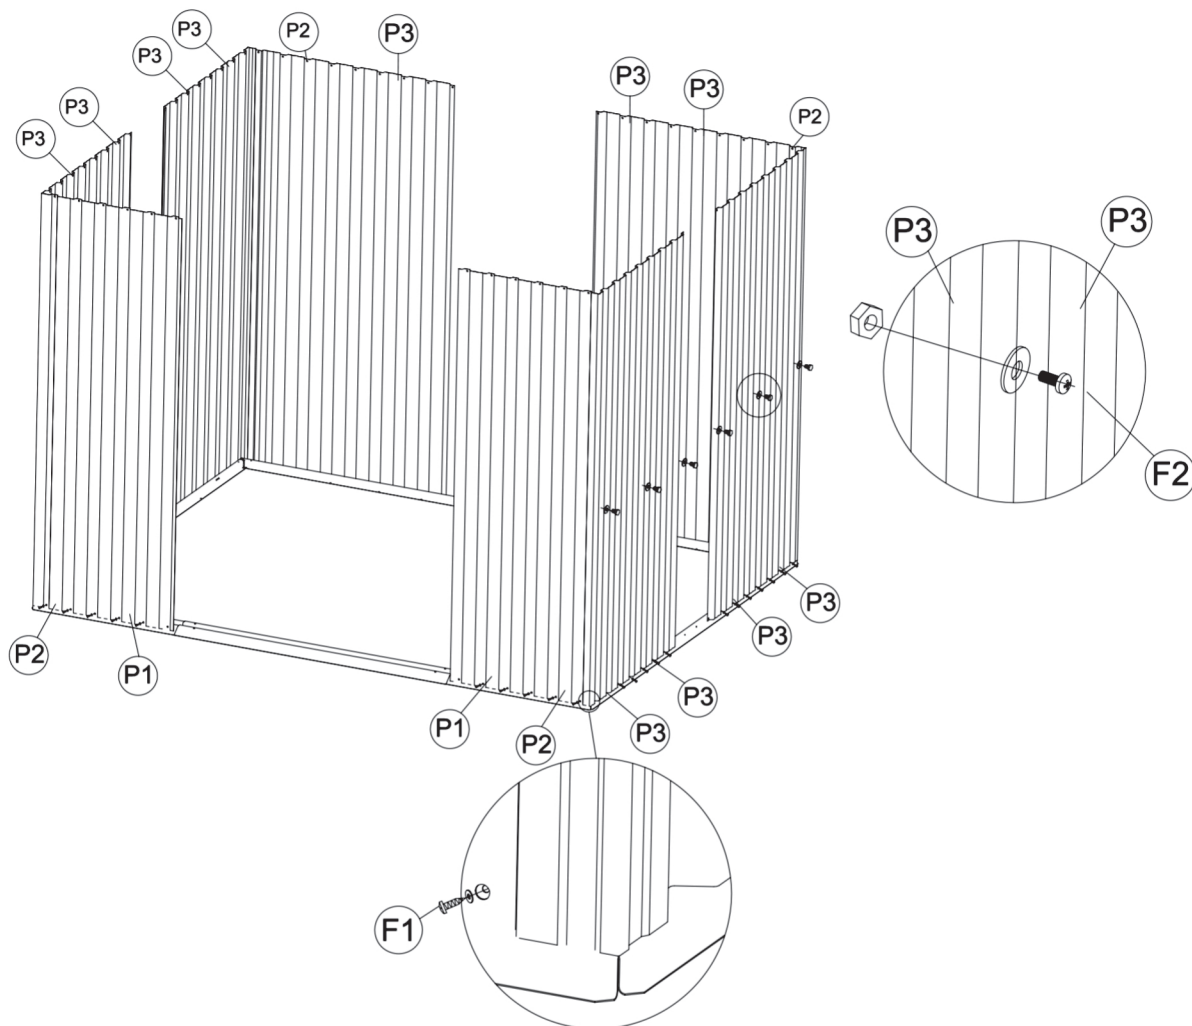


PART	NO	QTY
	1	2
	2	2
	3L	1
	3R	1
	4L	1
	4R	1
	5	1
	F1	24

2

Place the wall panels (P1, P2, P3 and P4) on the base bars (1, 3L, 3R, 4L and 4R) as shown. Line up all holes and secure with screws and washers F1 from the outside. Connect the wall panels with nuts, bolts and washers F2.




PART	NO	QTY
	P1	2
	P2	4
	P3	12
	P4	2
	F1S2	73
	F2S2	19

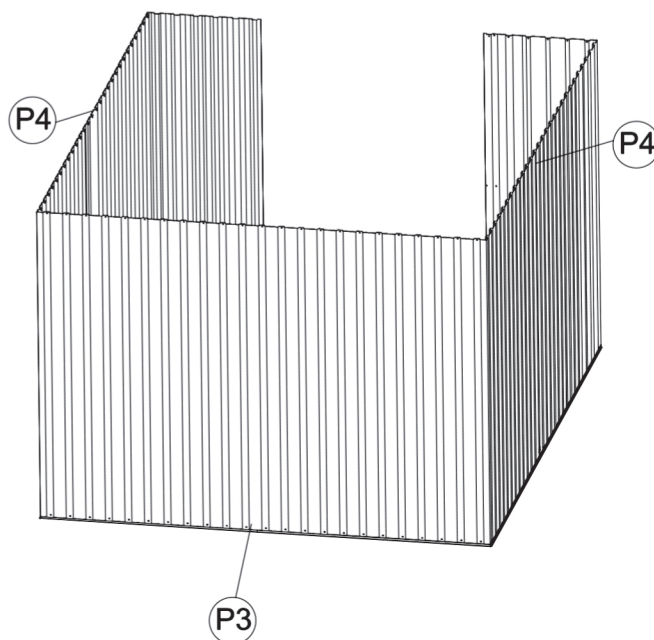






3

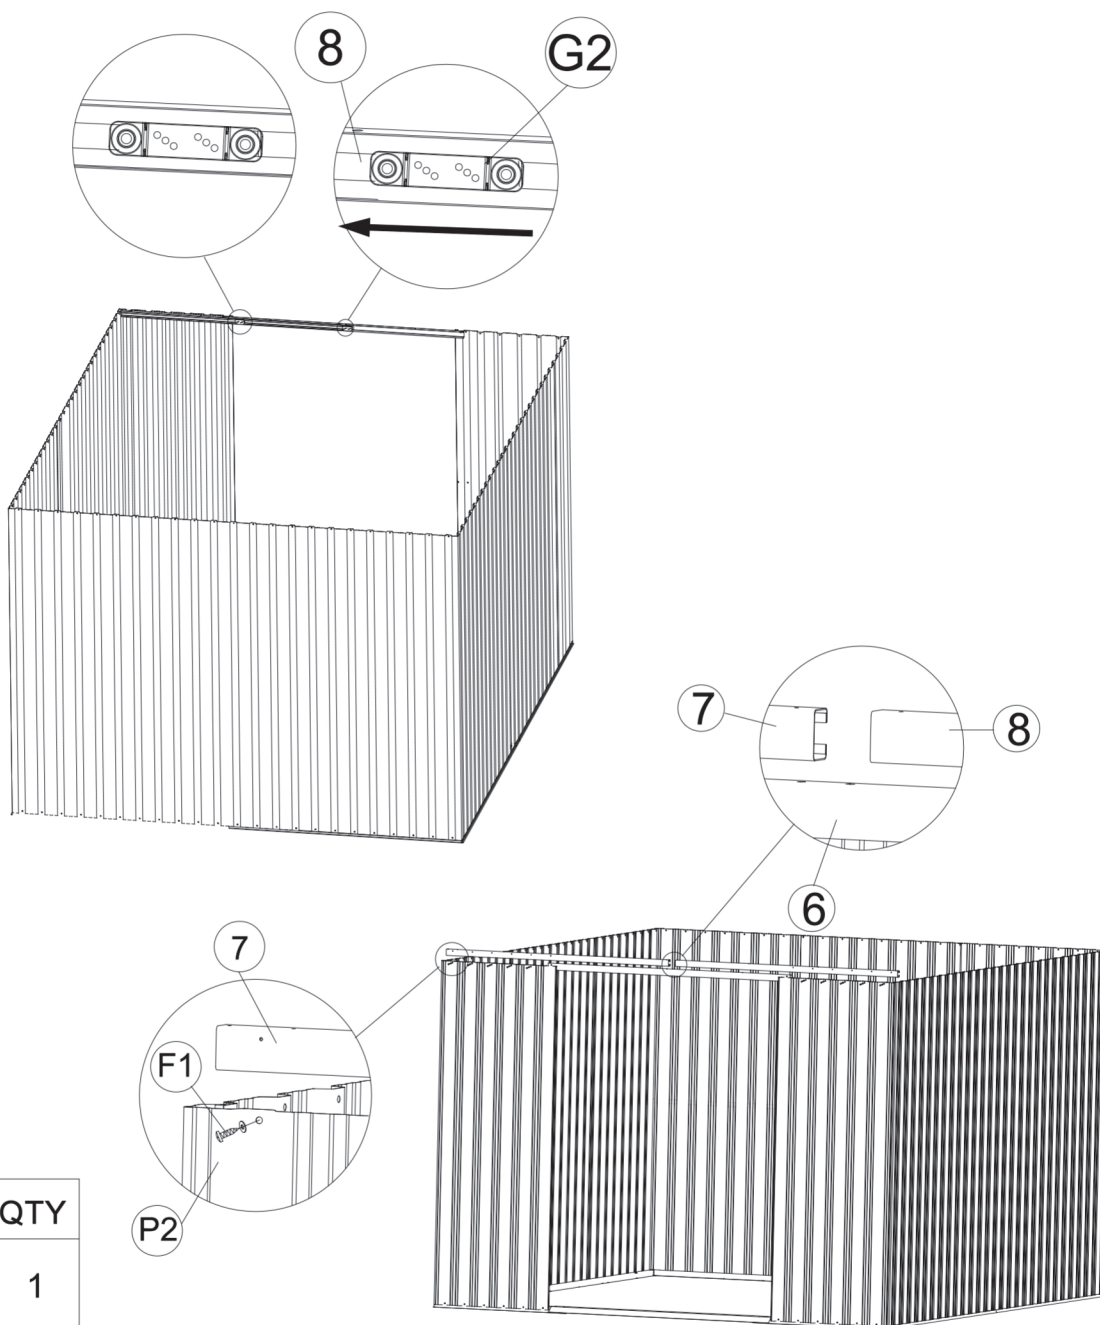Insert two top sliders(G2)into the sliding channel(8). Attach the door bar(6)to the two front panels. Then place the sliding channels(7 and 8) on top of the front wall panels from inside. Line up the holes with the wall panels and secure with screws and washers F1.

There are not pre-drilled holes on part 7 and part 8, but they can be easily fixed with screws F1.









PART	NO	QTY
	6	1
	7	1
	8	1
	G2	4
	F1S2	14

4

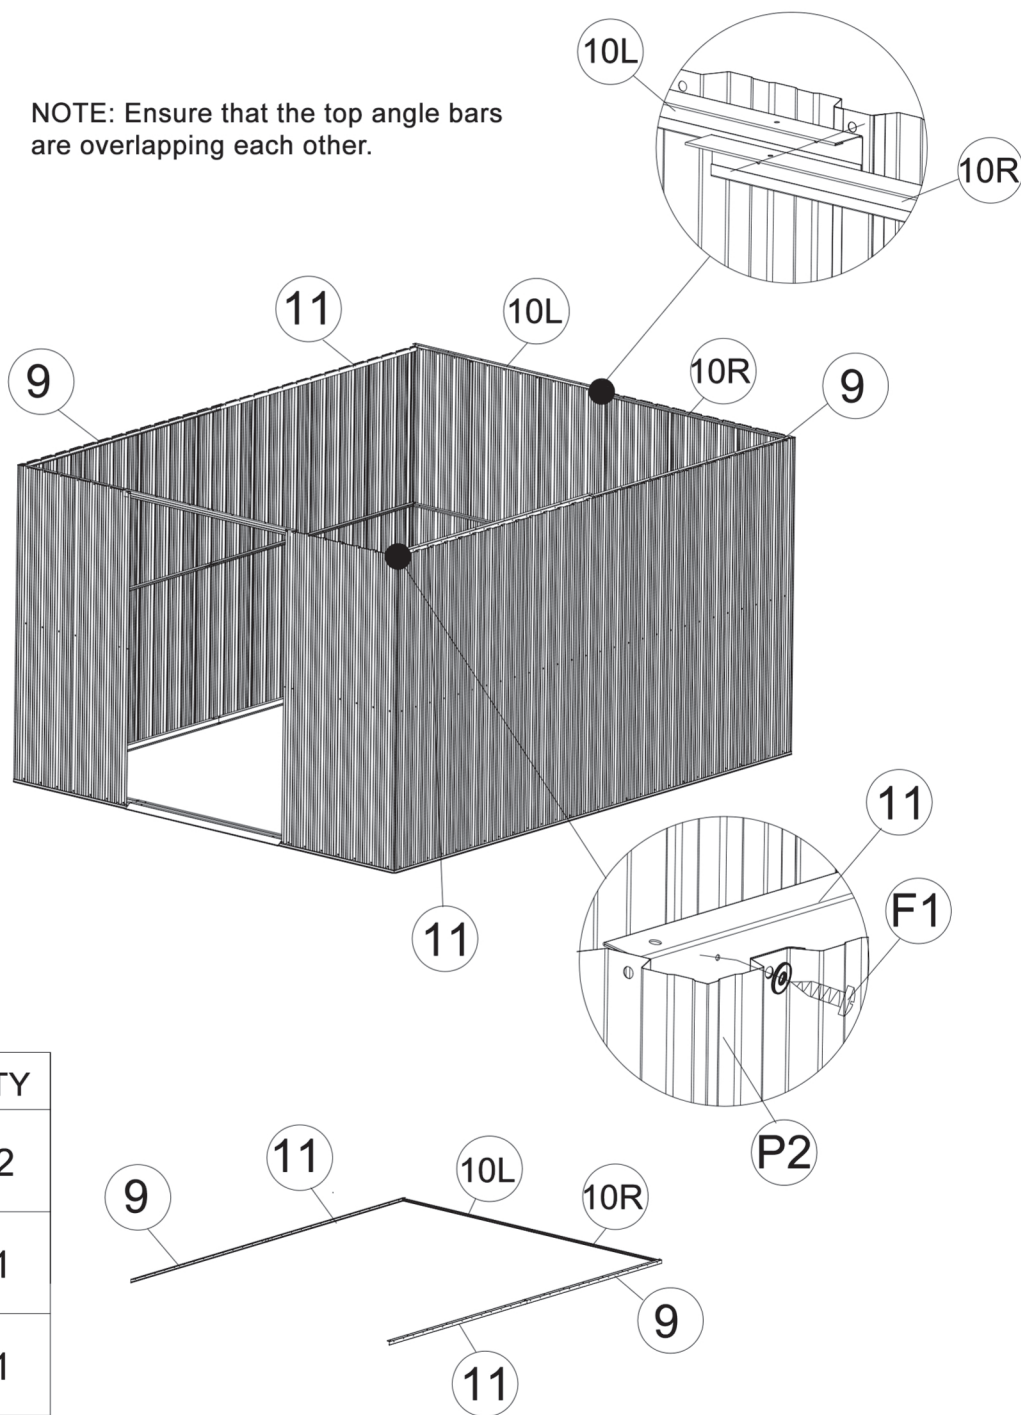Place the top angle bars (9, 10L, 10R and 11) on top of the wall panels. Line up the holes with the wall panels and secure with screws and washers F1.


NOTE: Ensure that the top angle bars are overlapping each other.



PART	NO	QTY
	9	2
	10L	1
	10R	1
	11	2
	F1S2	71

5


Place the left door column (25L) on top of the base bar and lined up with the wall panel. Secure the assembly with screws and washers F1. Repeat the same steps for the right door column (25R).

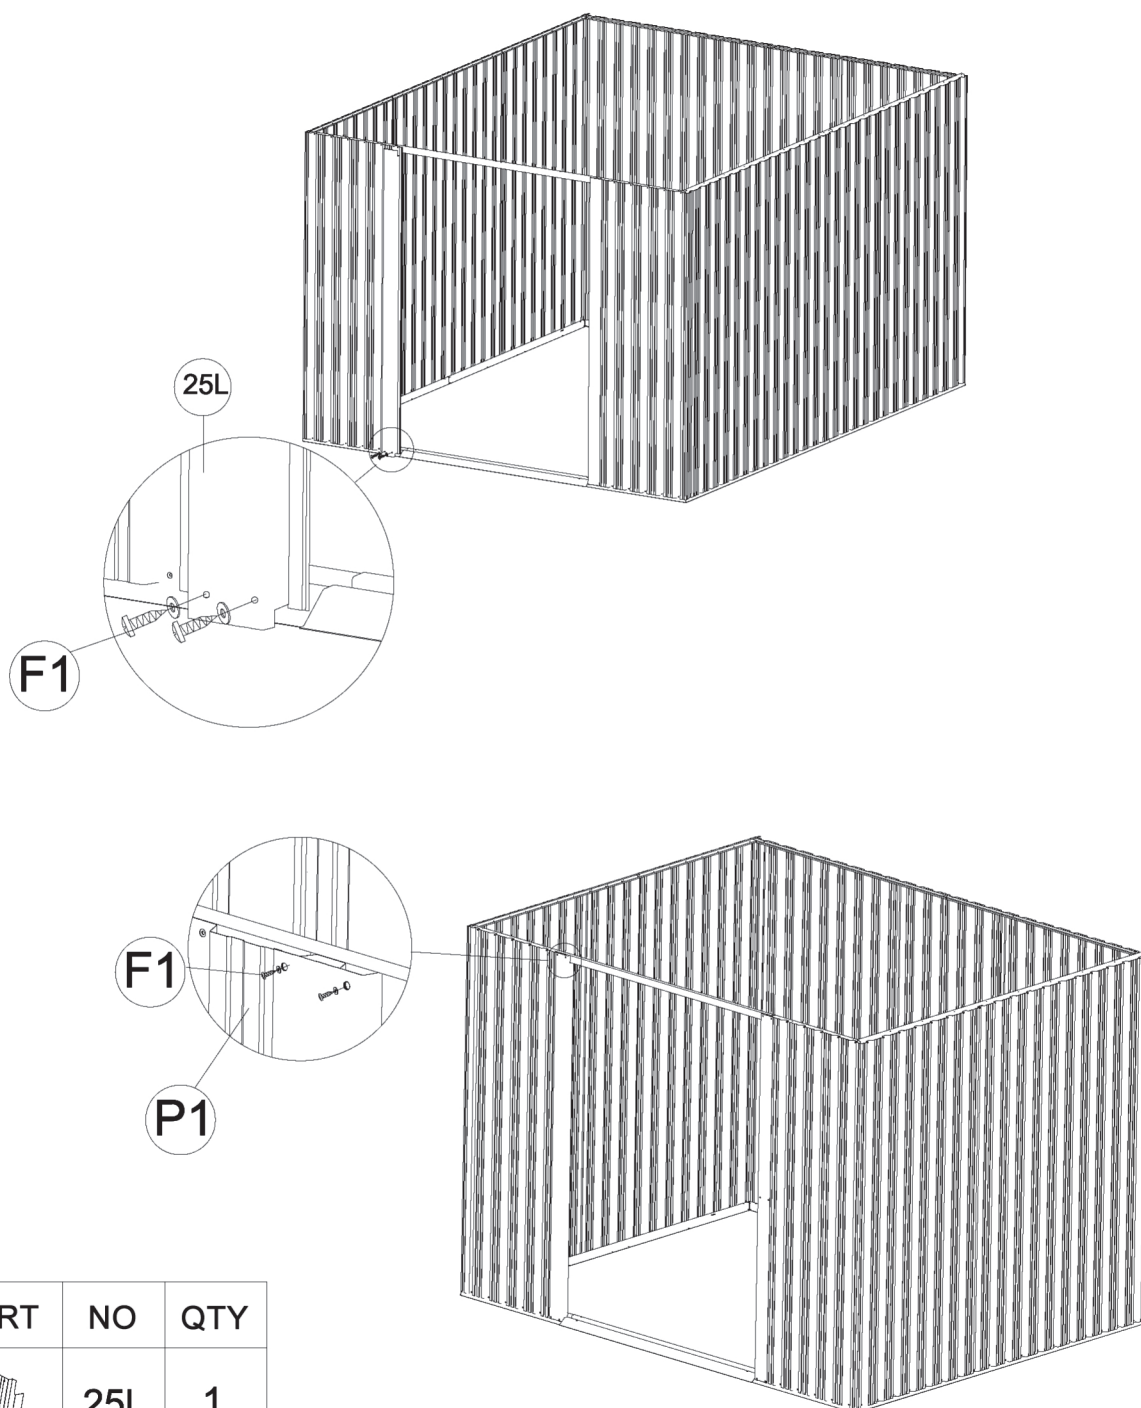





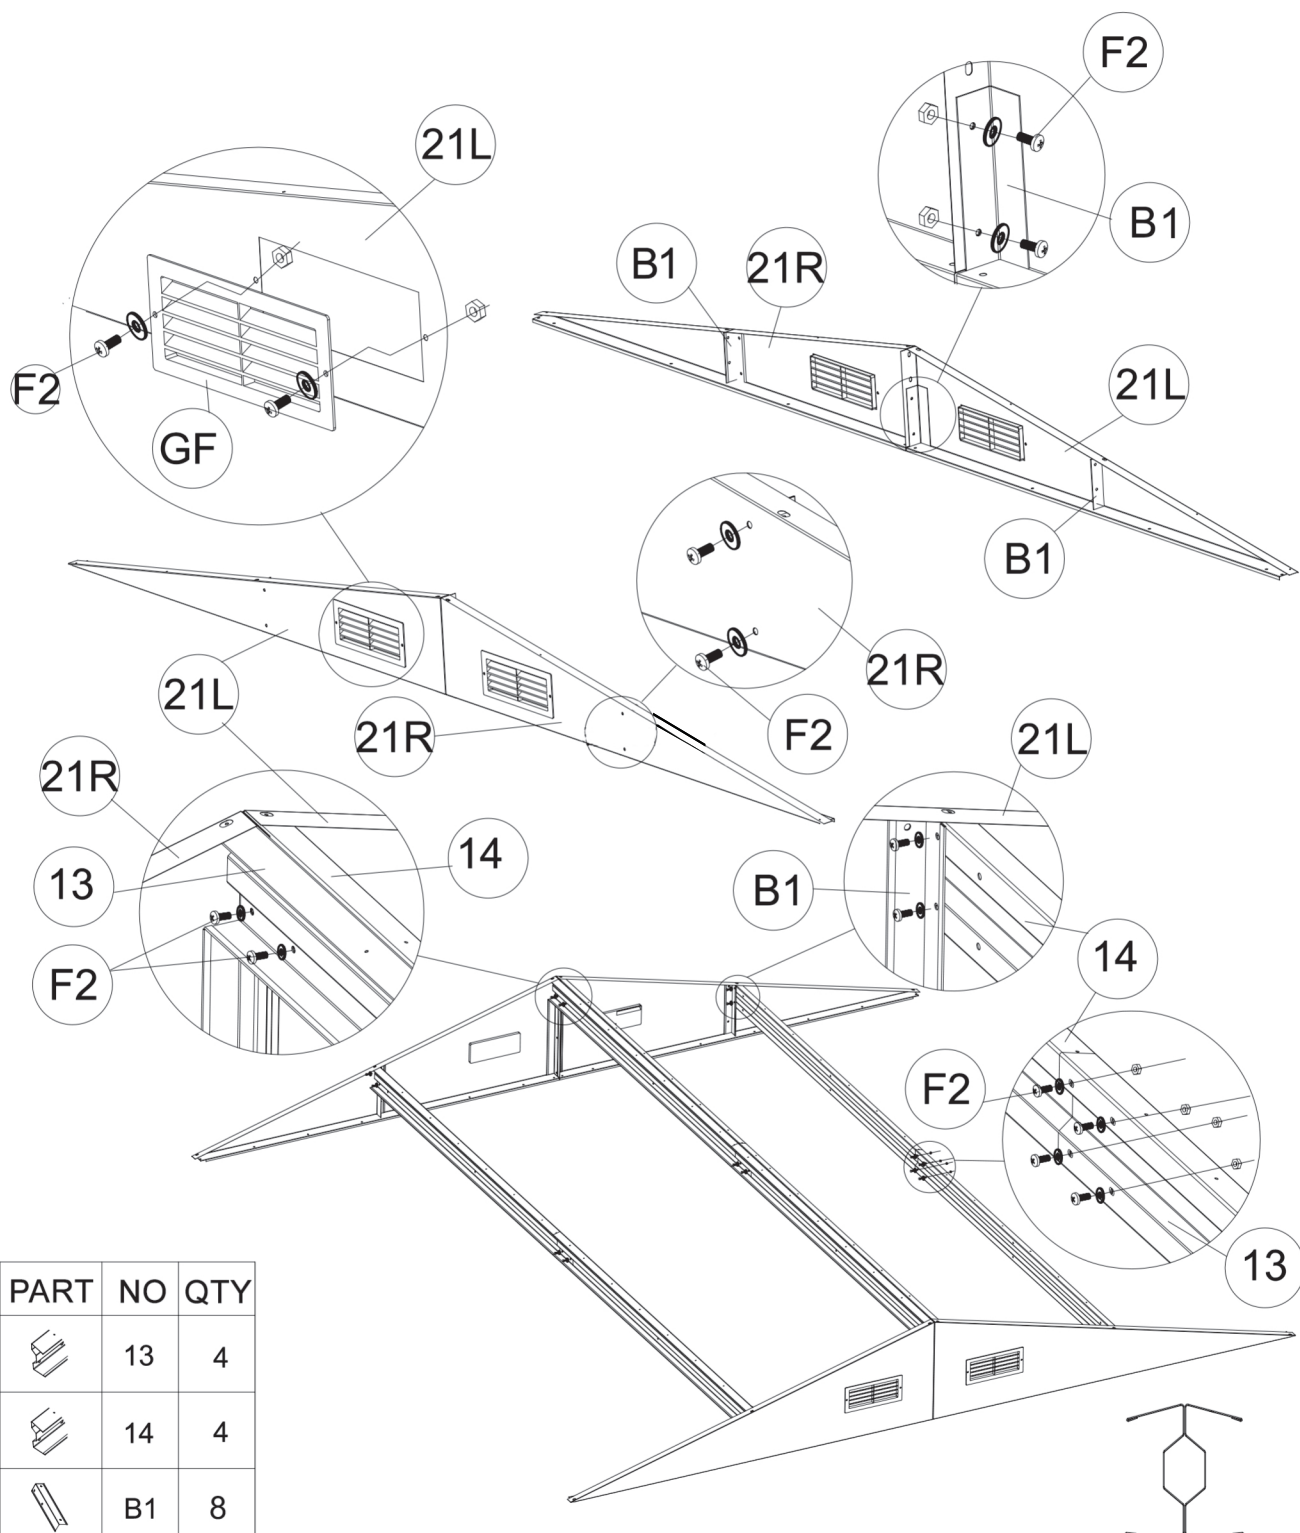


PART	NO	QTY
	25L	1
	25R	1
	F1S2	12

6


Assemble the four gable panels (21L and 21R) using the connectors (B1) with nuts, bolts and washers F2 as shown. Then connect the front and back gable panels to the roof supports (13 and 14) using nuts, bolts and washers F2. Finally, attach the vents (GF) to the respective front gables using nuts, bolts and washers F2.




PART	NO	QTY			
	13	4			
	14	4			
	B1	8			
	21L	2		GF	4
	21R	2		F2S2	40

7



Place the completed roof assembly on top of the sliding channels (7 and 8) and back top bars (10L and 10R). Align the holes and secure them with screws and washers F1.

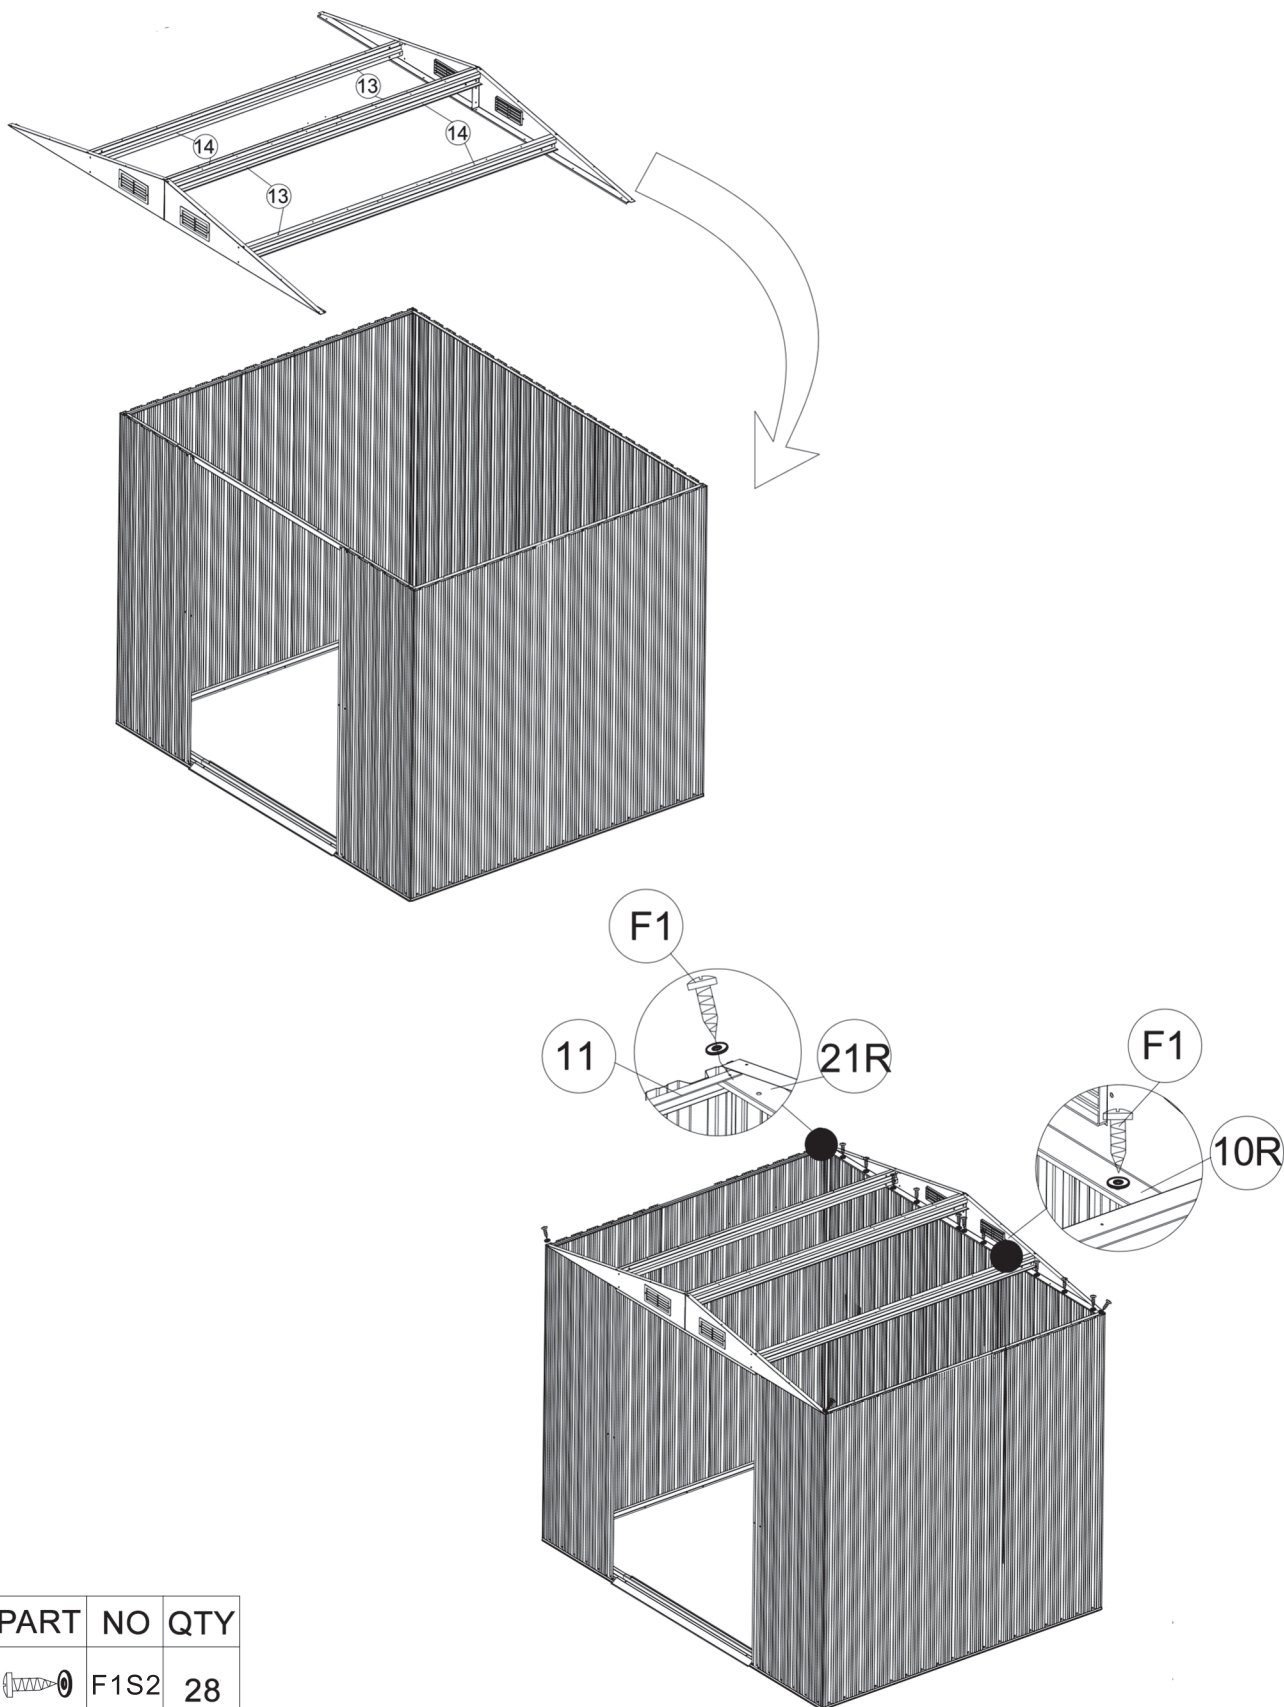





PART	NO	QTY
	F1S2	28

8



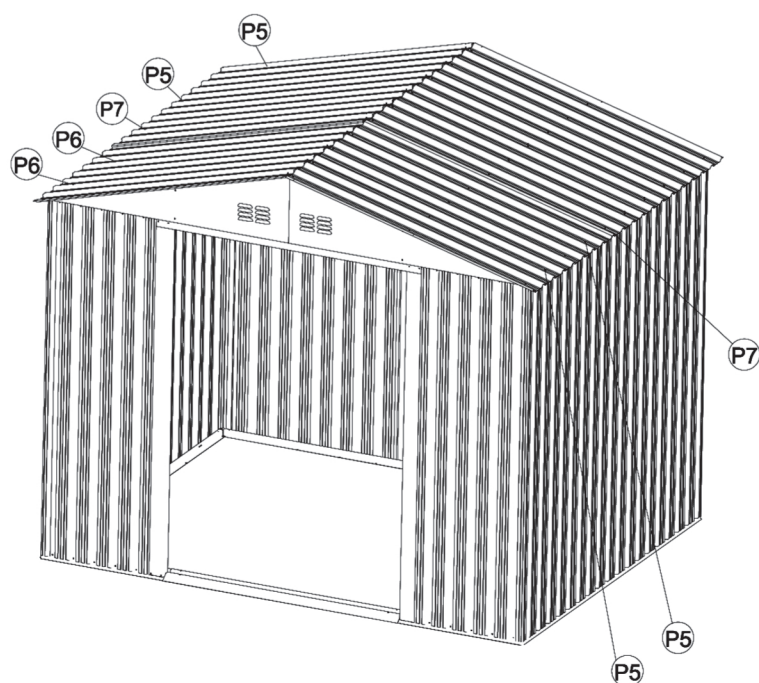
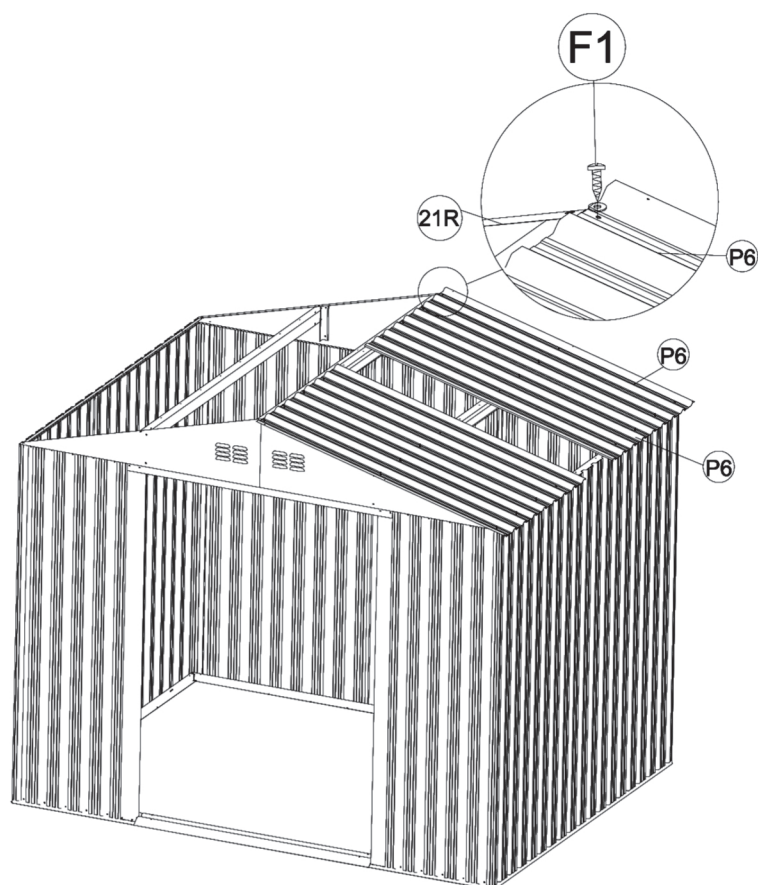
Place the roof panels (P5, P6 and P7) on top of the gable panels. Line up the holes and secure the assembly with screws and washers F1.









PART	NO	QTY
	P5	4
	P6	4
	P7	2
	F1S2	66

9

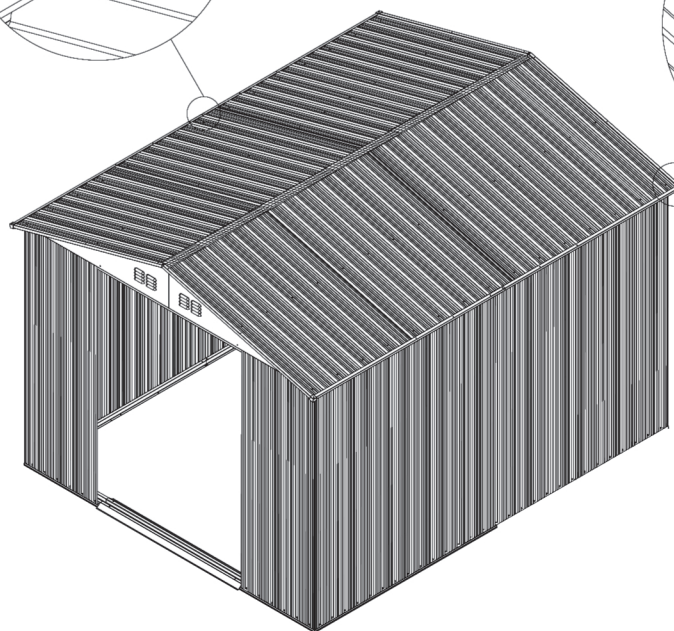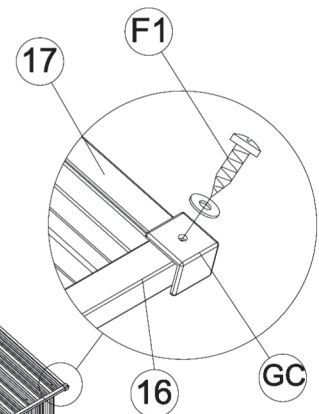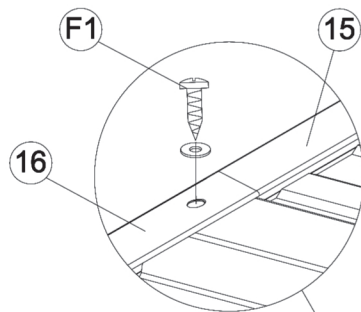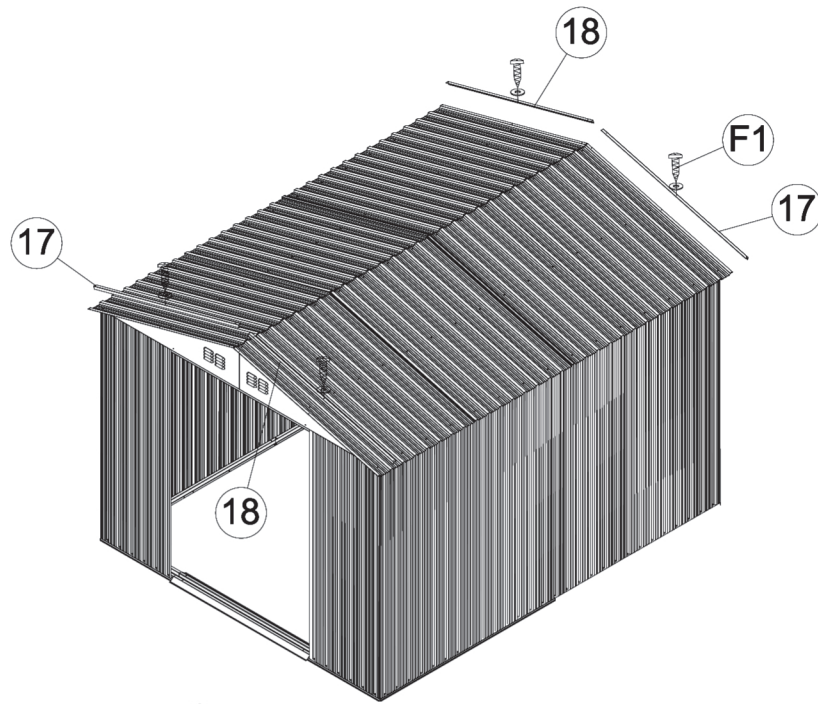
Attach the roof flashings (15, 16 and 17) to the roof panels using screws and washers F1. Then place four corner brackets (GC) on the roof joints and secure with screws and washers F1.






PART	NO	QTY
	17	2
	18	2
	15	2
	16	2
	GC	4
	F1S2	10

10

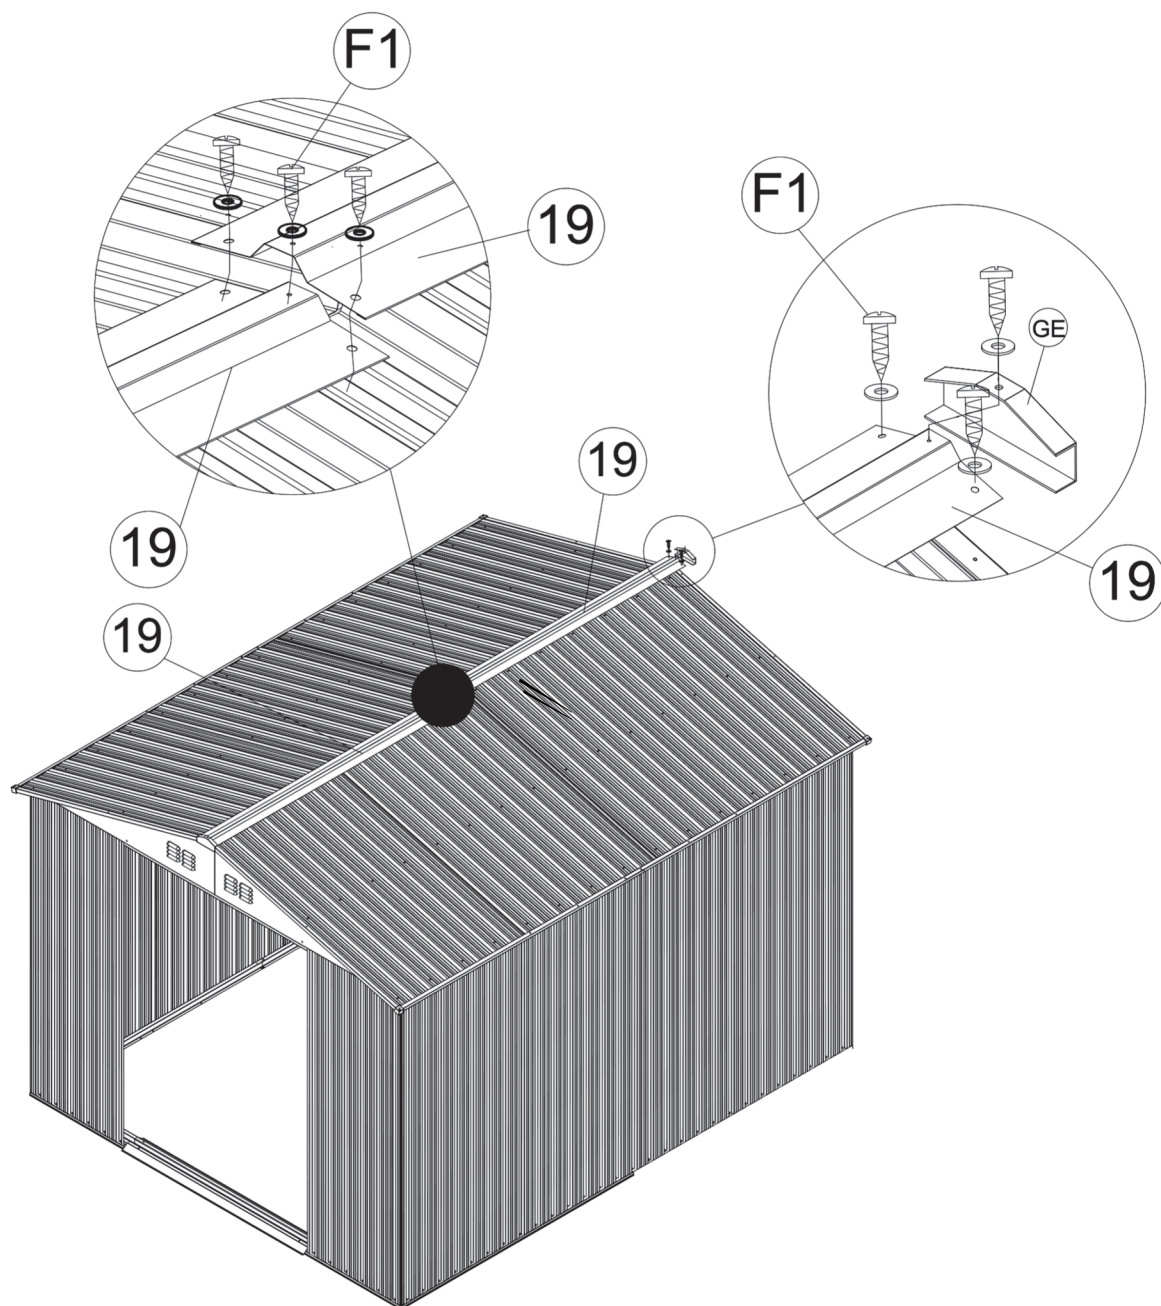
Attach two centre roof flashings (19) on top of the roof panels as shown. Secure them with screws and washers F1. Then attach the flashing end caps (GE) to both ends of the centre roof flashing and secure with screws and washers F1.









PART	NO	QTY
	19	2
	GE	2
	F1S2	10

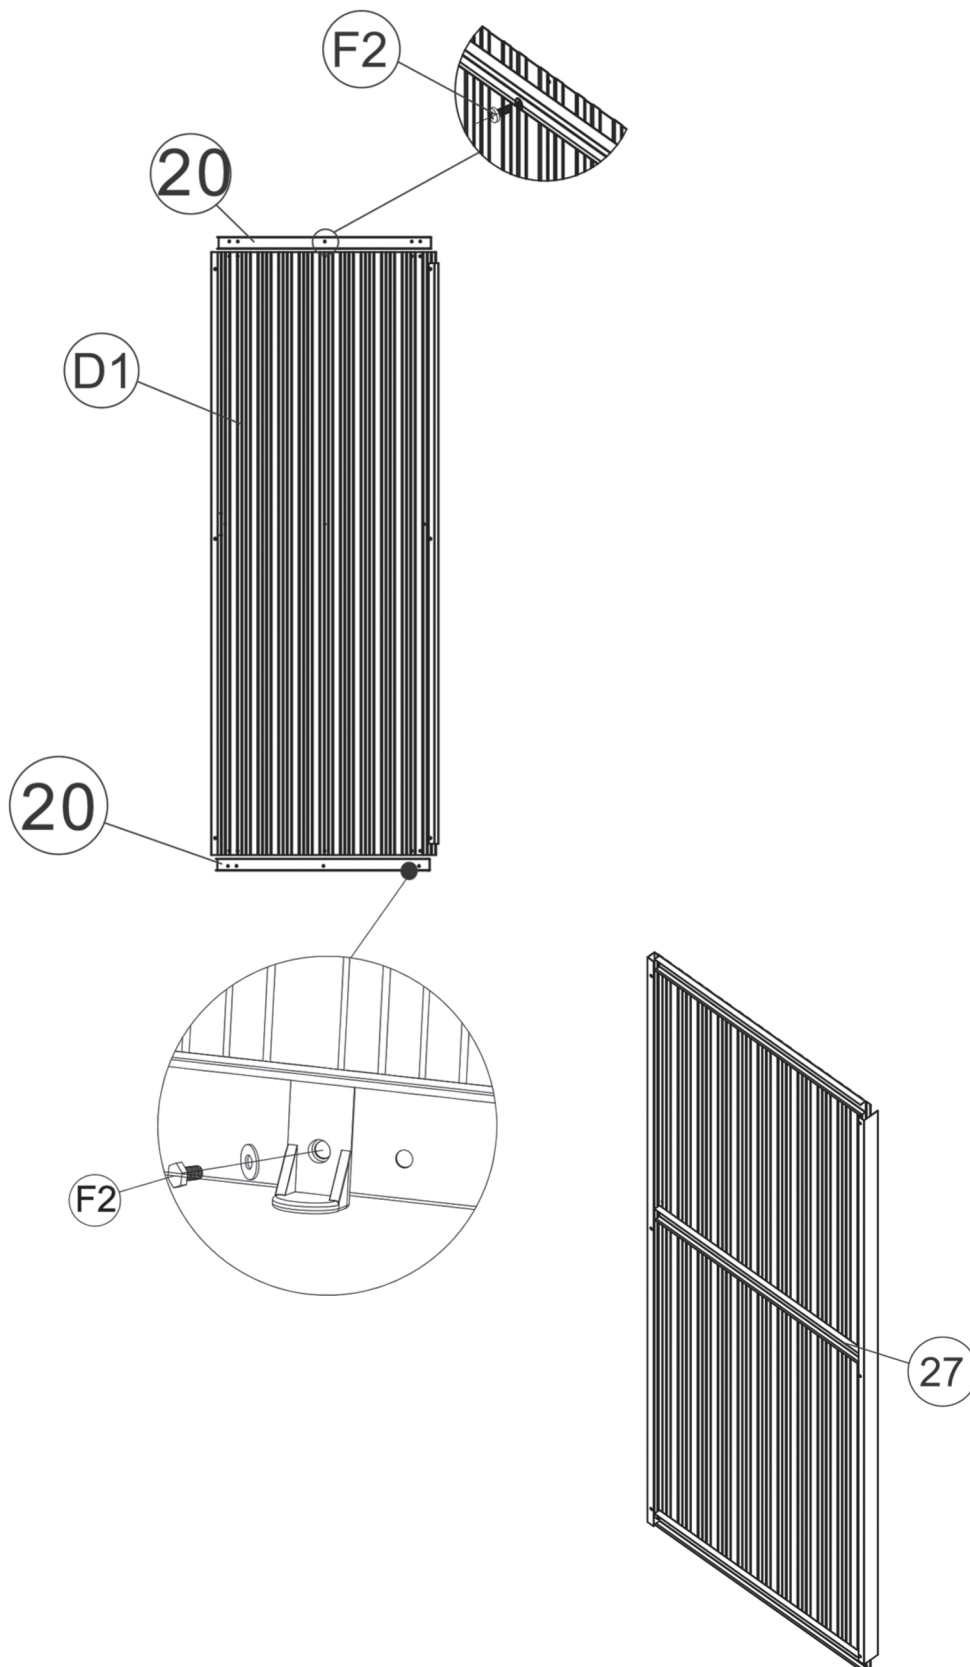11


Attach the door bars (20 and 27) to the door panels (D1 and D2) and secure them with nuts, bolts and washers F2. The attach the bottom slider (GD) to the bottom door bar and secure them with nuts, bolts and washers F2.



PART	NO	QTY
	27	2
	20	4
	D1	1
	D2	1
	GD	4
	F2S2	34

12

Attach two door handles (GB) to the door panels (D2) and secure them with nuts, bolts and washers F2.

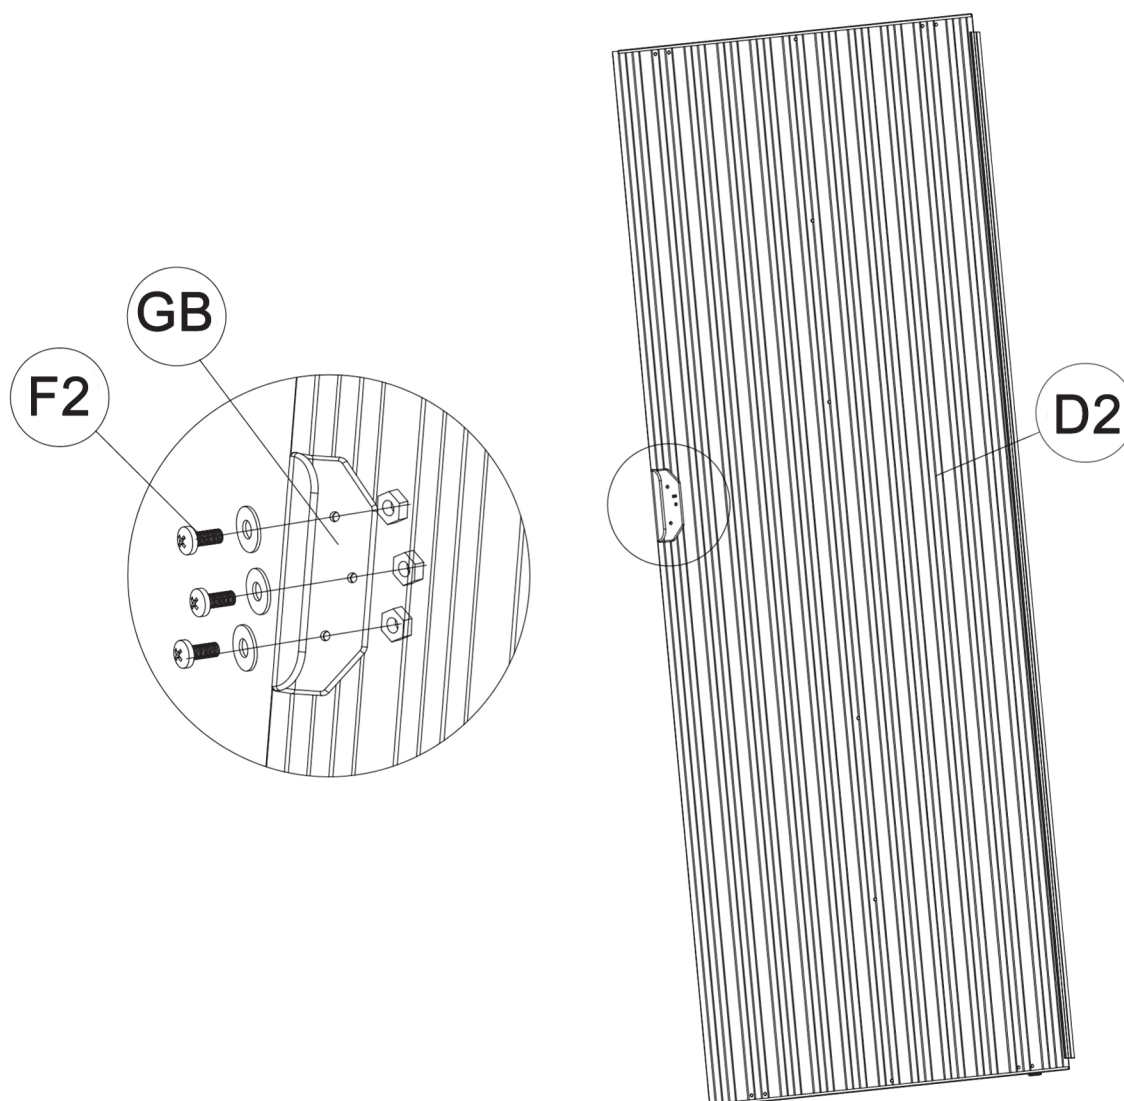



PART	NO	QTY
	GB	2
	F2S2	6

13

Slide the door panel assembly into the base bar (3L). Ensure that the bottom slider (GD) sits inside the base bar. Then attach the top door panel to the top slider (G2) using screws F3.

NOTE: Make sure that all screw holes are properly aligned before securing the screws.

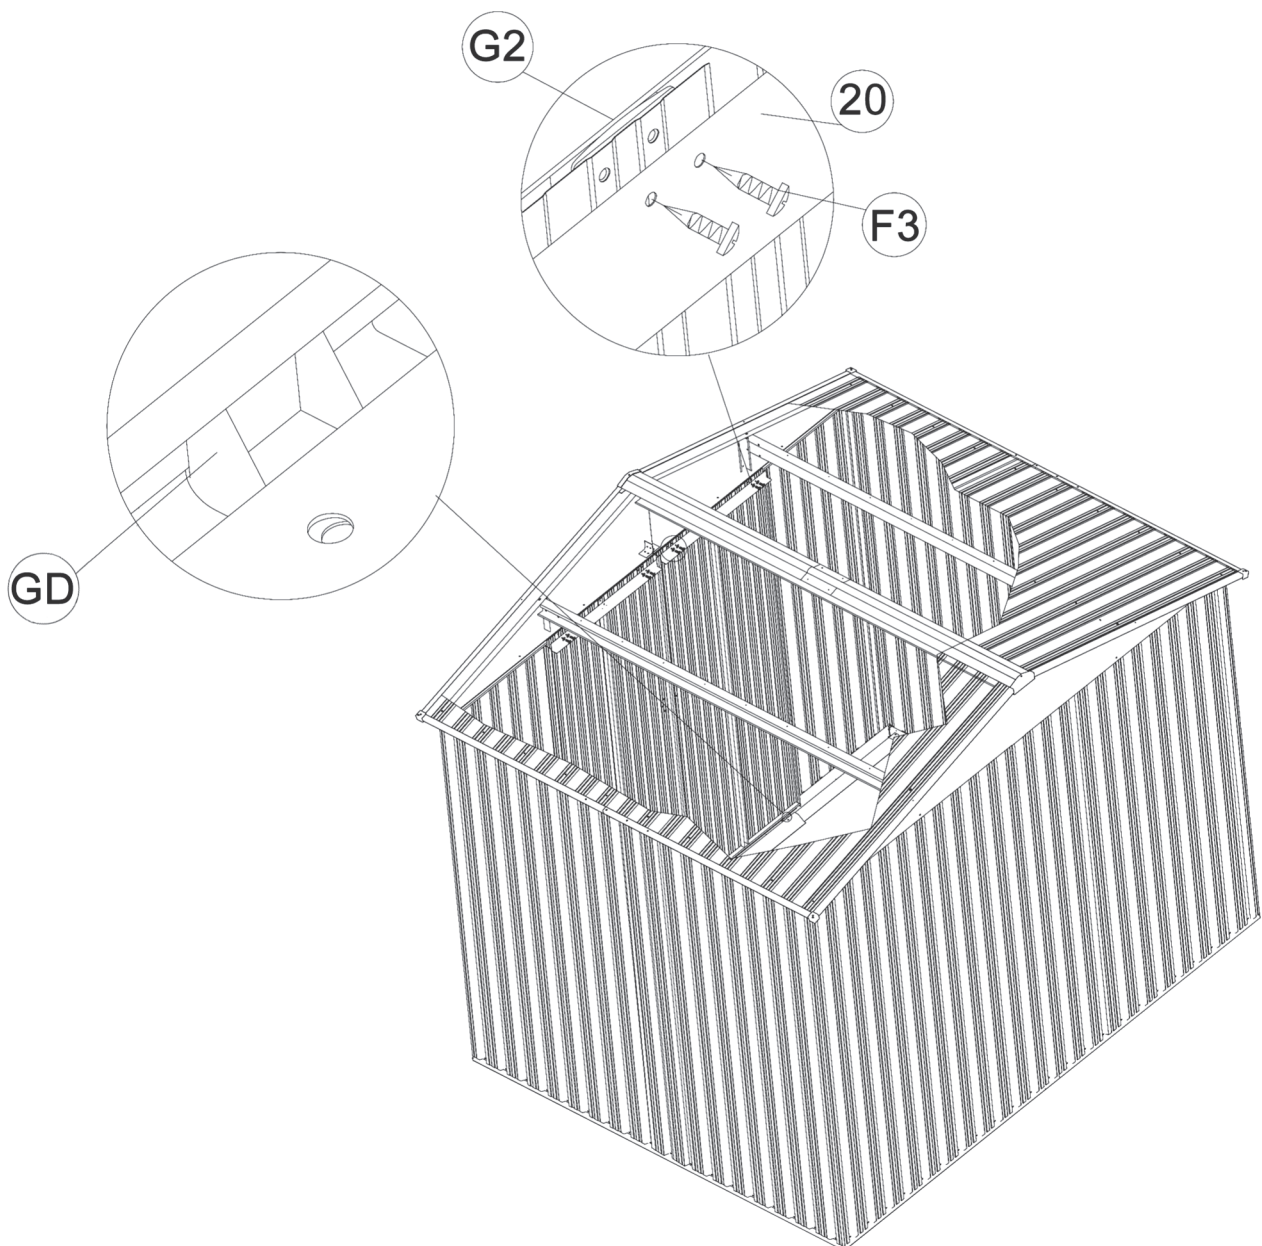

PART	NO	QTY
	F3	8