




GARDEN SHED

MODEL: GS-4X6-GY

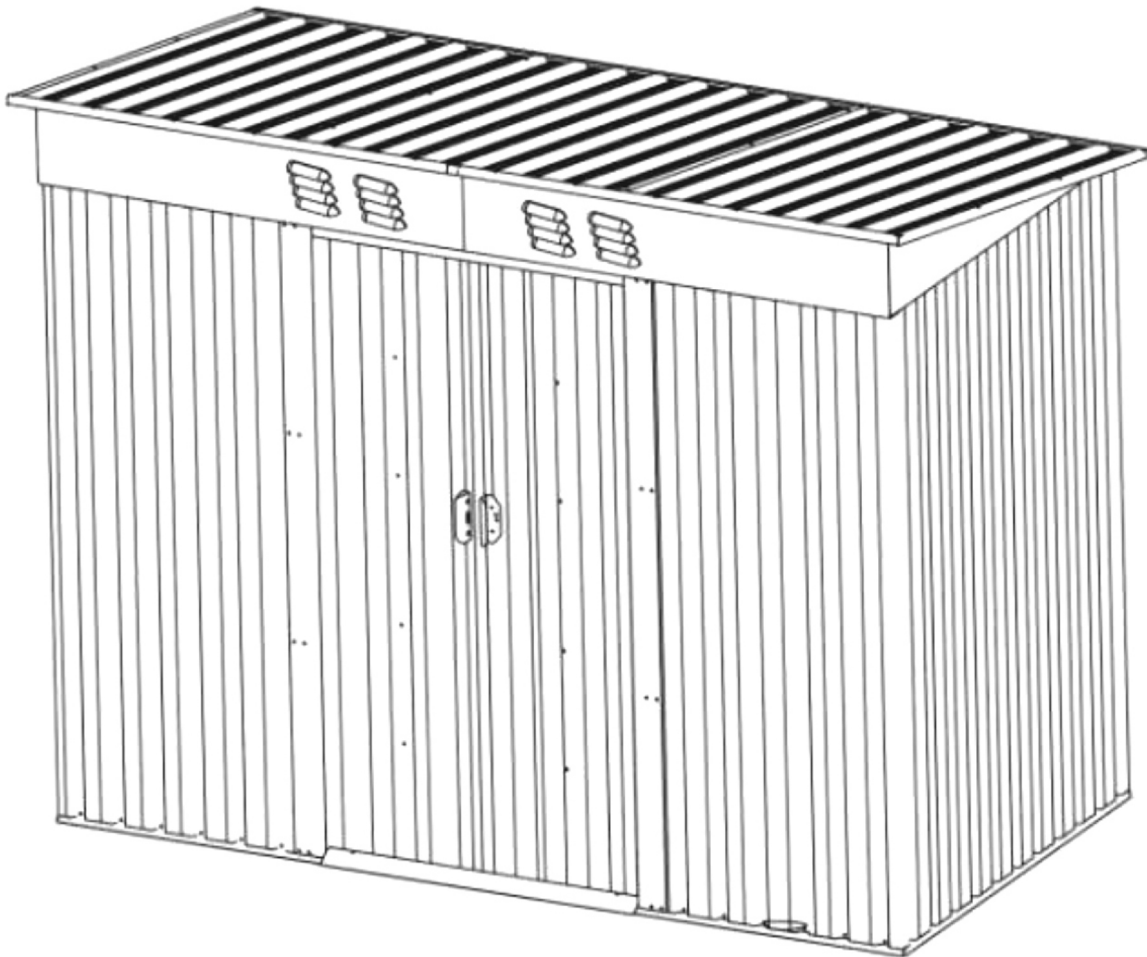

ASSEMBLY INSTRUCTIONS

- Please read these instructions carefully before starting assembly.
- Assembly must be done strictly in accordance with these instructions
- Please check to ensure that all parts are included in the packaging.
- To avoid injury, please use work gloves to perform the assembly.
- It is recommended that assembly be done by two persons.
- Assembly duration is about 2 to 3 hours.

BEFORE ASSEMBLY

Assembly instructions

Before starting assembly, check local building codes regarding footings, locations and other requirements. Study and understand these assembly instructions. Important information and helpful tips will make your assembly easier and more hassle-free. This manual contains all the appropriate information for assembling your product. Review all instructions before you begin and during assembly. Follow the sequence carefully for correct results.

Parts and Parts list

Check the list for all necessary parts. Separate the contents by part number when reviewing the parts list. The first few steps will show how to join related parts to make larger sub assemblies that will be used later. Familiarise yourself with the hardware and fasteners for easier use during assembly. Extra fasteners are provided for your convenience.

PLAN AHEAD

Check weather

Be sure that the day you select to assemble the shed is dry and calm. Do not attempt to assemble the shed on a windy day. Be careful on wet or muddy ground.

Teamwork

Whenever possible, two or more persons should work together to assemble the shed. One person can position parts or panels while the other is able to handle the fasteners and tools.

Tools and materials

There are some basic tools and materials needed for the assembly. Decide which method of anchoring and the type of foundation you wish to use in order to form a complete list materials that you will need.

CARE AND MAINTENANCE

Finish

For long-lasting finish, periodically clean and wax the exterior surface. Touch up scratches as soon as you notice them. Immediately clean the area with a wire brush. Then wash it and apply touch-up paint as per the paint manufacturer's recommendations.

Doors and roof

Always keep the door tracks clear of dirt and other debris that prevent them from sliding easily. Lubricate door tracks annually with furniture polish or silicone spray. Keep doors closed and locked to prevent wind damage. Keep the roof clear of leaves and debris with a long-handle, soft-bristle broom.

Fasteners

Use all washers supplied to protect against weather infiltration and protect the metal from being scratched by screws. Regularly check the shed for loose screws, bolts and nuts and re-tighten as necessary.

Moisture

A plastic sheet (vapour barrier) placed under the entire floor area with good ventilation will help to reduce condensation.


















Attention


















Do not store swimming pool chemicals in the shed. Combustibles and corrosive solvents must be stored in air-tight approved containers.










Tips

Wash off inked part numbers on coated panels with soap and water. Silicone caulking may be used for watertight seals throughout the shed.


PARTS LIST

PART	NO	QTY
	1	1
	2	1
	3L	1
	3R	1
	4L	1
	4R	1
	5	1
	6	1
	7	1
	8	1
	9	1
	10L	1
	10R	1
	11	1
	12L	1
	12R	1
	15	2

PART	NO	QTY
	17	4
	20	4
	21L	1
	21R	1
	25L	1
	25R	1
	27	2
	B1	4
	P1A	2
	P2	4
	P3	5
	P4	2
	P4A	2
	P5	2
	P6	1
	P7	2
	D1	1

PART	NO	QTY
	D2	1
	G2	4
	GB	2
	GC	4
	GD	4
	GF	2
 M4X10	F1	180
 M4X10	F2S2	50
 M5X16	F3	8


PARTS

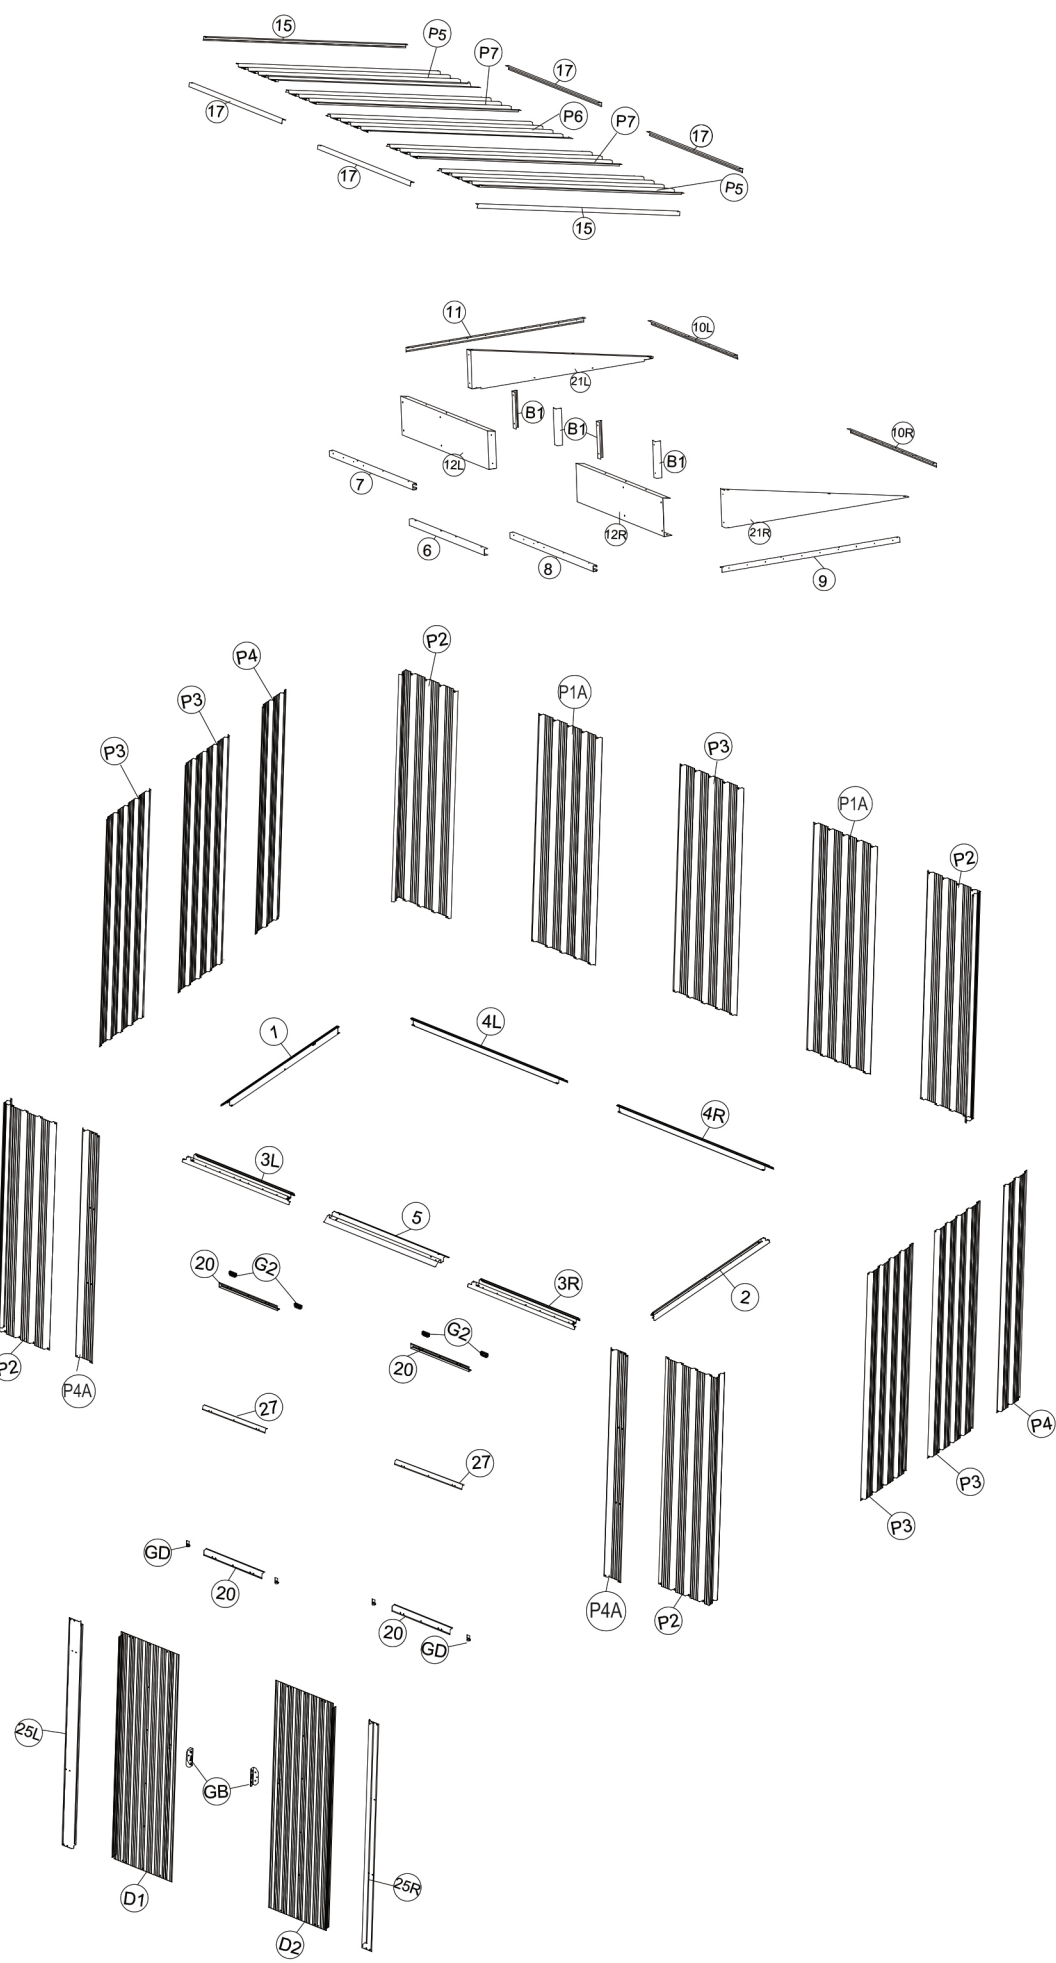

1

Assemble the base bars (1 to 4L) with screws F1. Next, place the entrance taper channel (5) on top of the bars (3L and 3R). Secure with screws F1 to the base as shown. Ensure that the base bar assembly is a perfect rectangle.


NOTE: Beware of sharp edges.

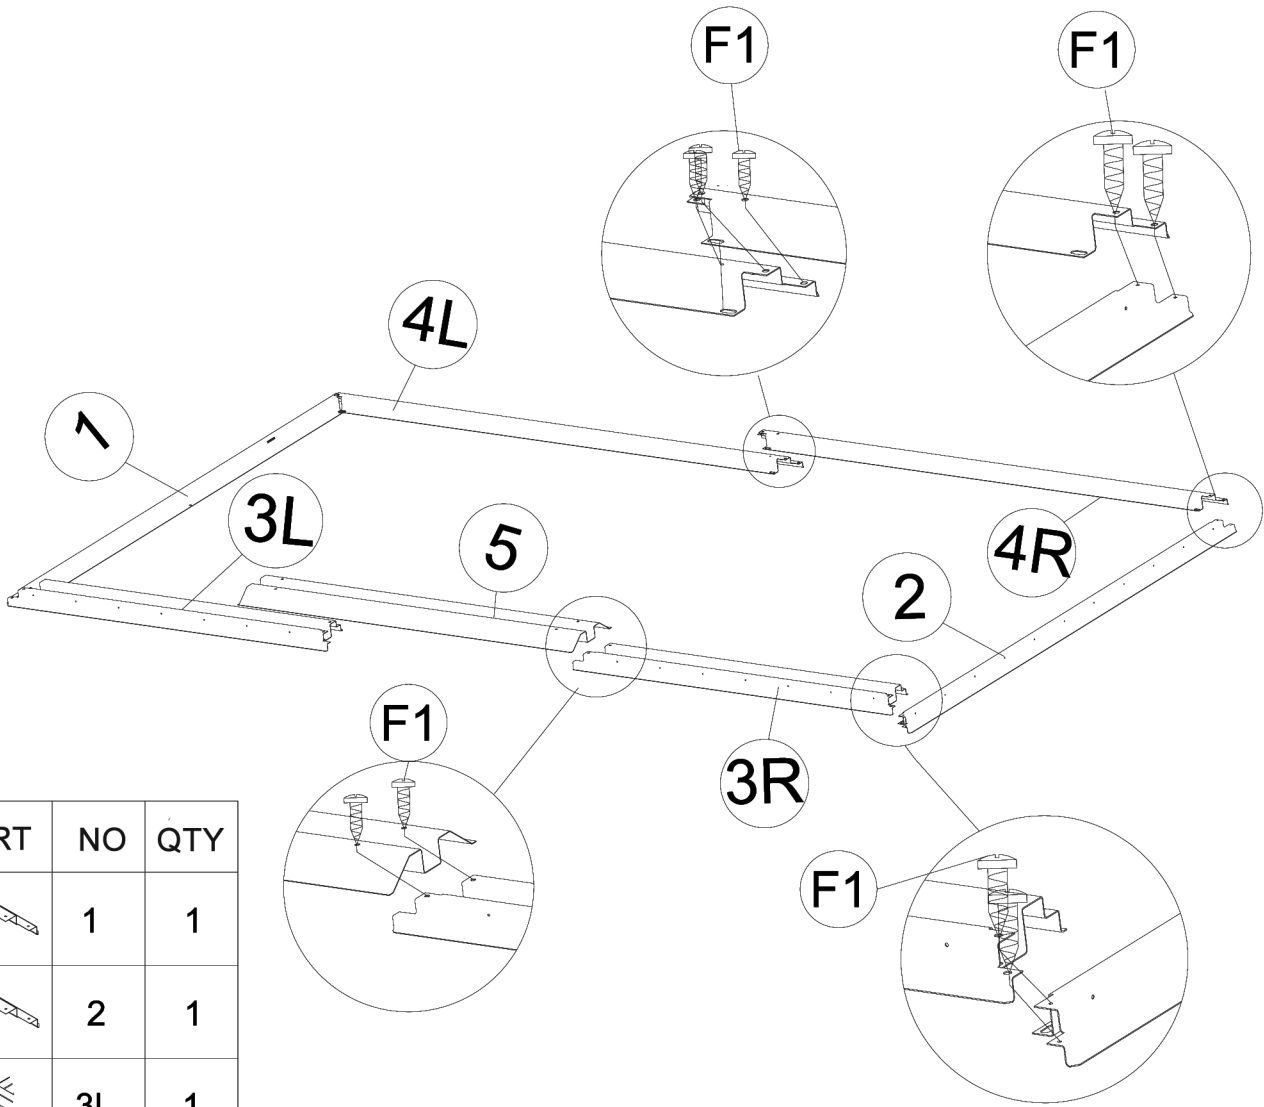








PART	NO	QTY
	1	1
	2	1
	3L	1
	3R	1
	4L	1
	4R	1
	5	1
	F1	16

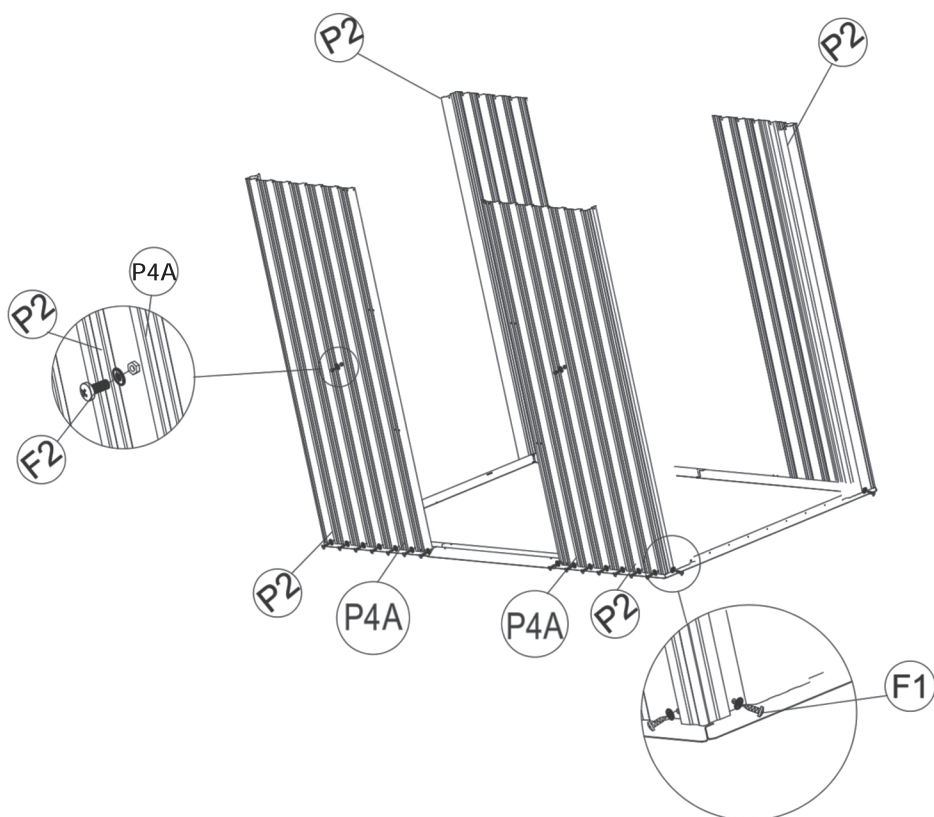2

Place the front panel supports (P4A) on the base bars as shown. Next, attach wall panel (P2) to supports (P4A) with bolt, nut and washer F2. Fasten P2 to the base bar with screws and washers F1. Then attach wall panels (P3 and P4) to wall panels (P2) with screws and washers F12 from the inside.



PART	NO	QTY
	P2	4
	P3	4
	P4	2
	P4A	2
	F1S2	20
	F2S2	15

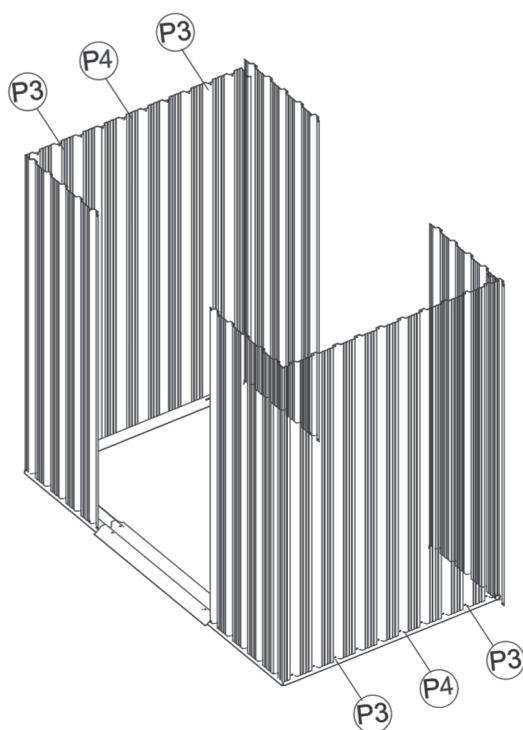









3

Insert four top sliders (G2) into the sliding channels (7 and 8) as shown. Attach the door bar (6) between the two front panels (P1A). Then place the sliding channels (7 and 8) on top of the front door panels from the inside. Line up the holes with the wall panels. Fasten with screws and washers F1.

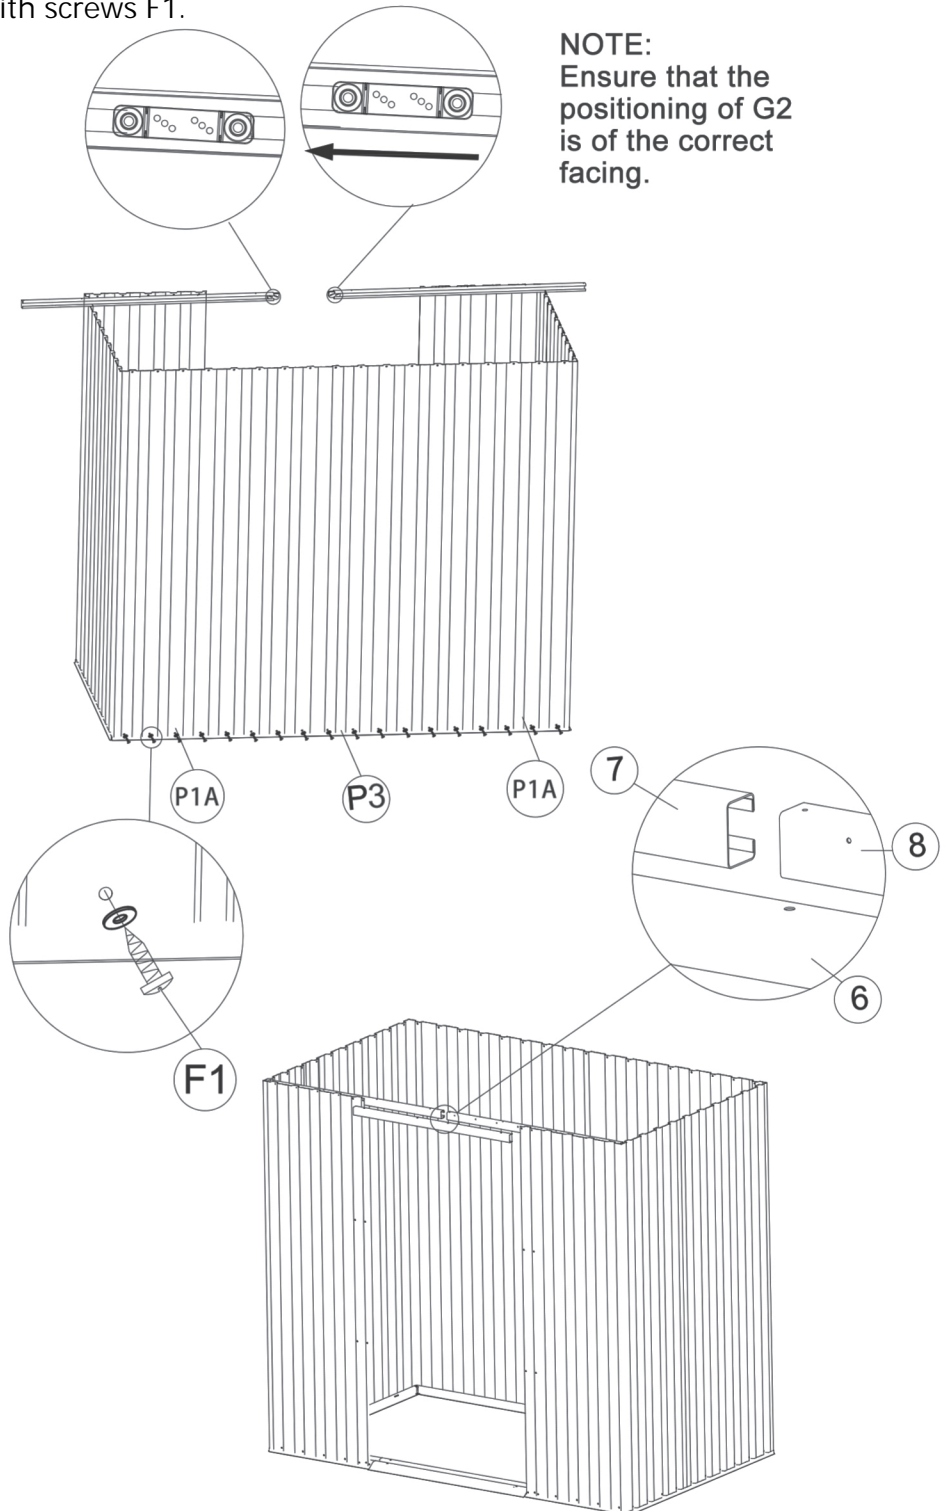There are not pre-drilled holes on part 7 and part 8, but they can be easily fixed with screws F1.


NOTE:
Ensure that the positioning of G2 is of the correct facing.








PART	NO	QTY
	6	1
	7	1
	8	1
	P1A	2
	P3	1
	G2	4
	F1S2	28

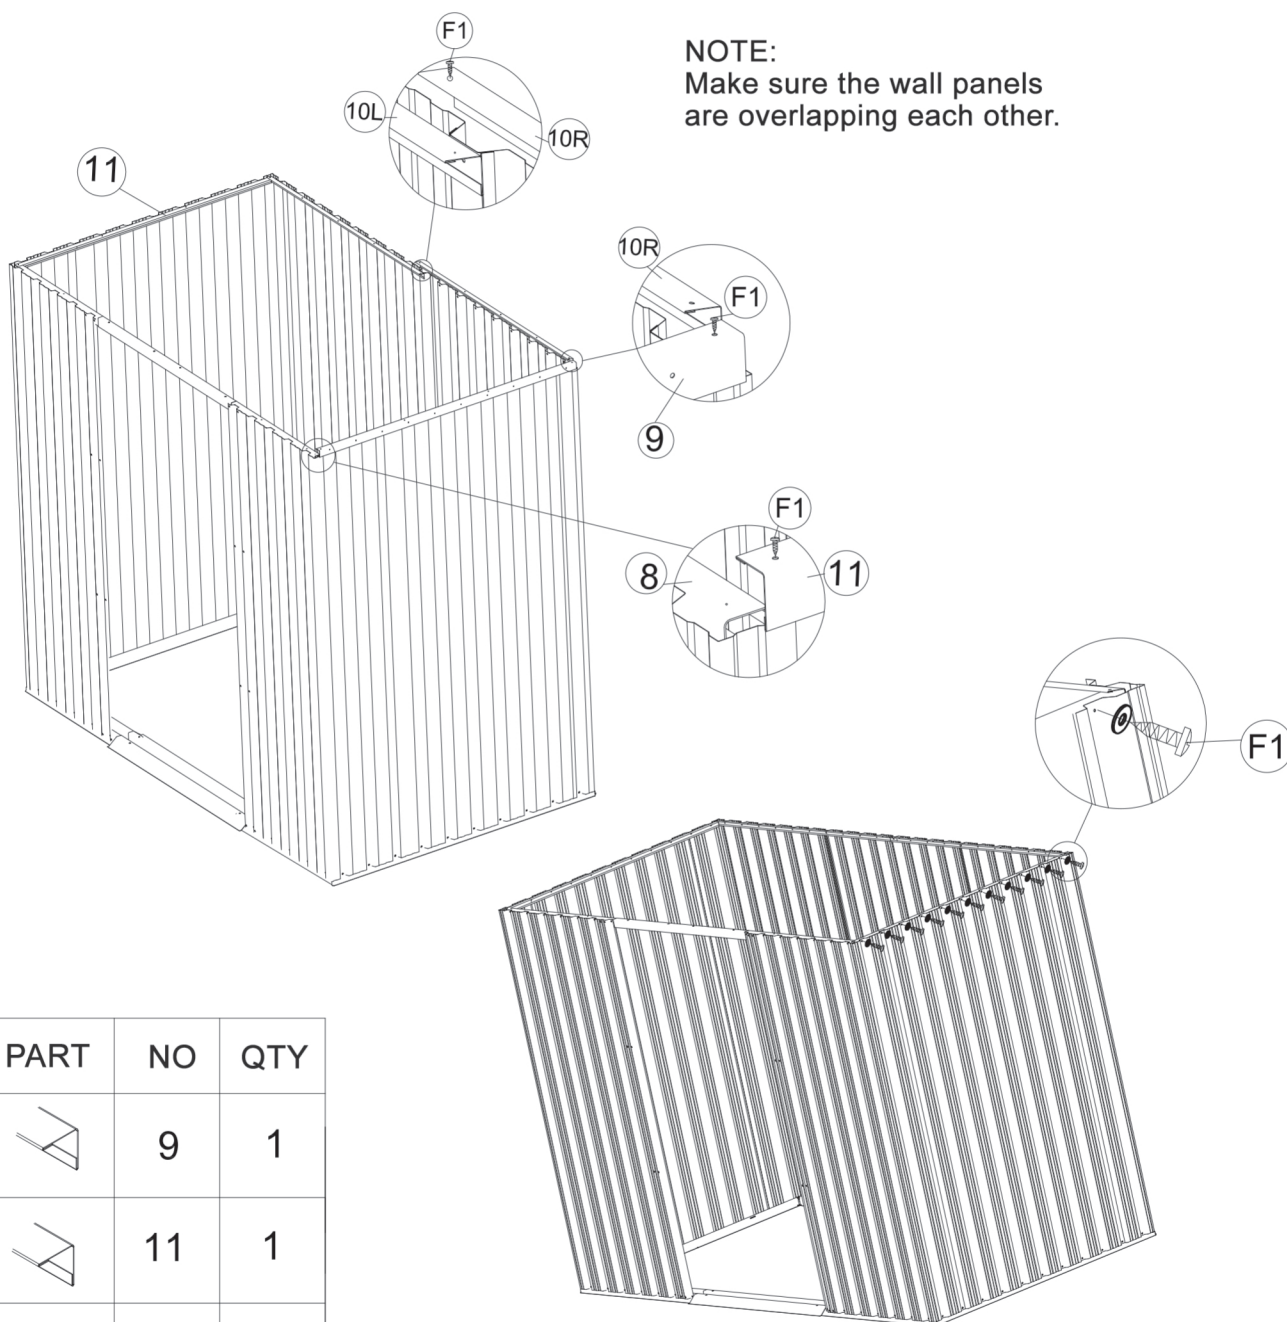4


Place the top angle bars (9, 10L and 10R) on top of the wall panels as shown. Line up the holes with the wall panels and fasten with screws and washers F1. Next, place the wall panels (P1, P2 and P3) between the top bars and the top angle bars. Secure them with screws and washers F1.






PART	NO	QTY
	9	1
	11	1
	10L	1
	10R	1
	F1S2	39

5

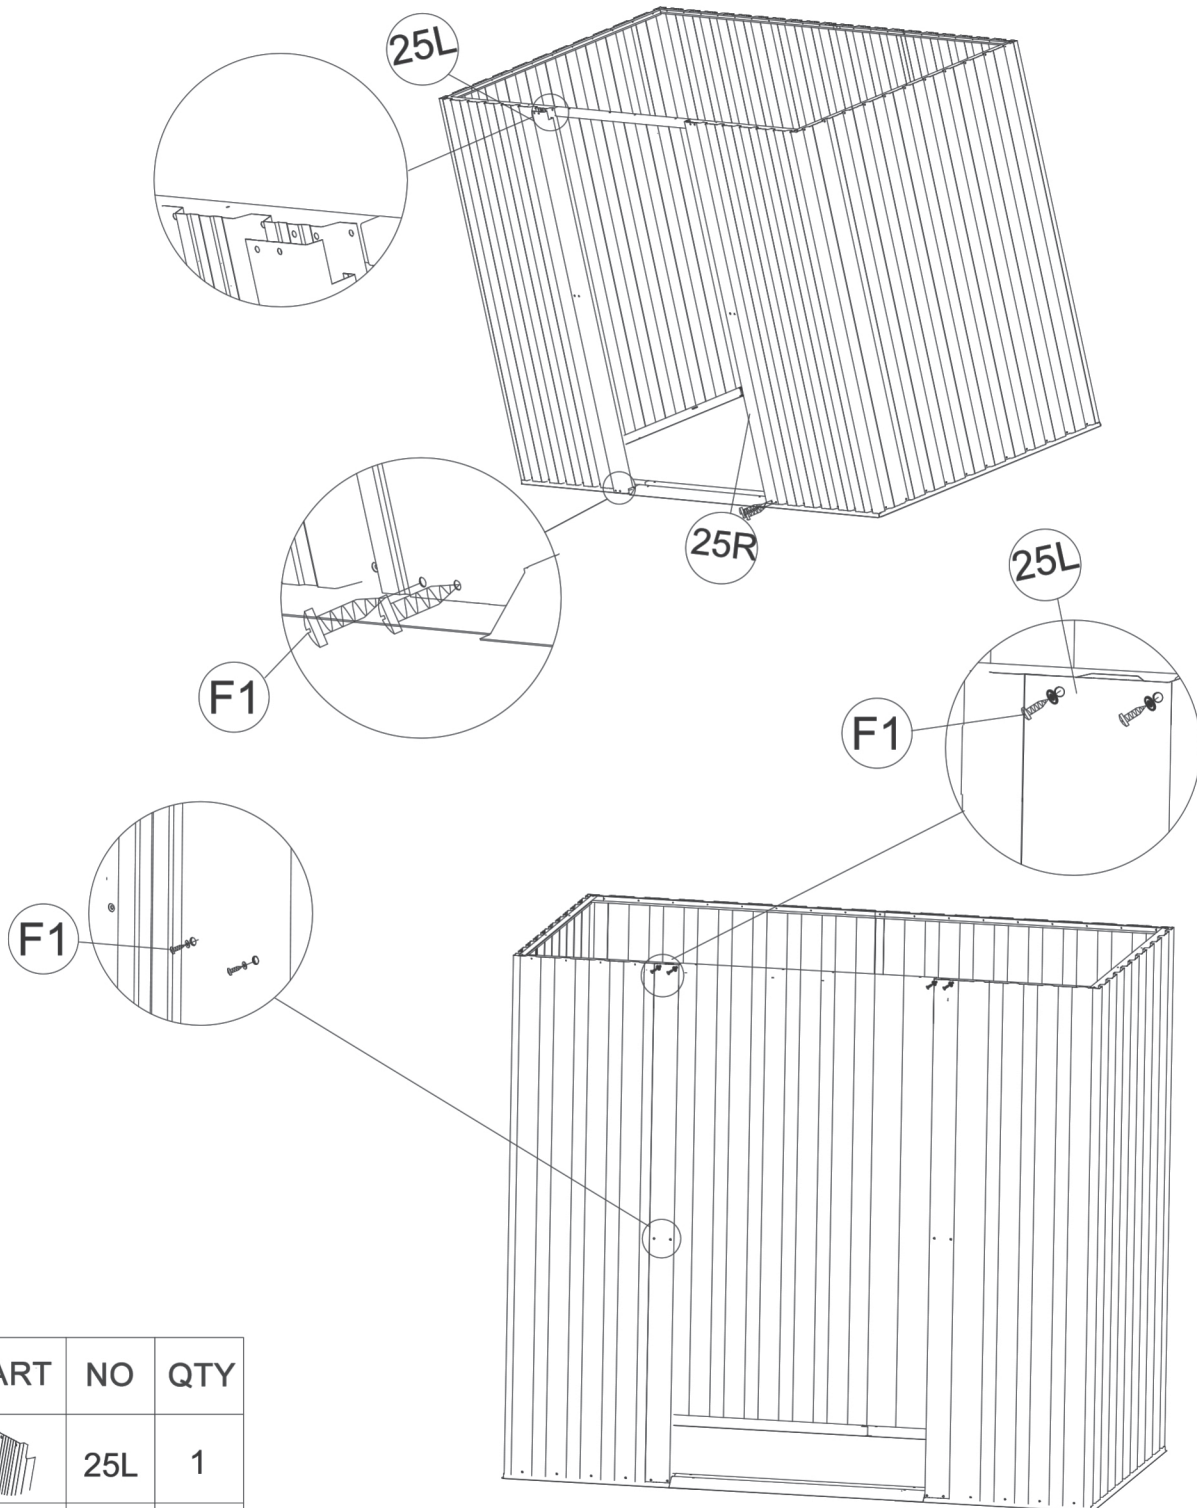
Place the left door column (25L) and right door column (25R) on top of the base bars (3L and 3R). Slide in the wall panels as shown. Secure with screws and washers F1.



PART	NO	QTY
	25L	1
	25R	1
	F1S2	12

6

Place the gable panels (12R and 21R) on top of the sliding channel (6) and side top bar (9). Align the holes and secure with screws and washers F1 from the inside. Repeat the steps for the other gable panels (12L and 21L). Next, attach the four gable panels together and secure with connector (B1) and bolts, nuts and washers F2 as shown. Finally, attach the vents (GF) to the front gables (12L and 12R) with bolts, nuts and washers F2.

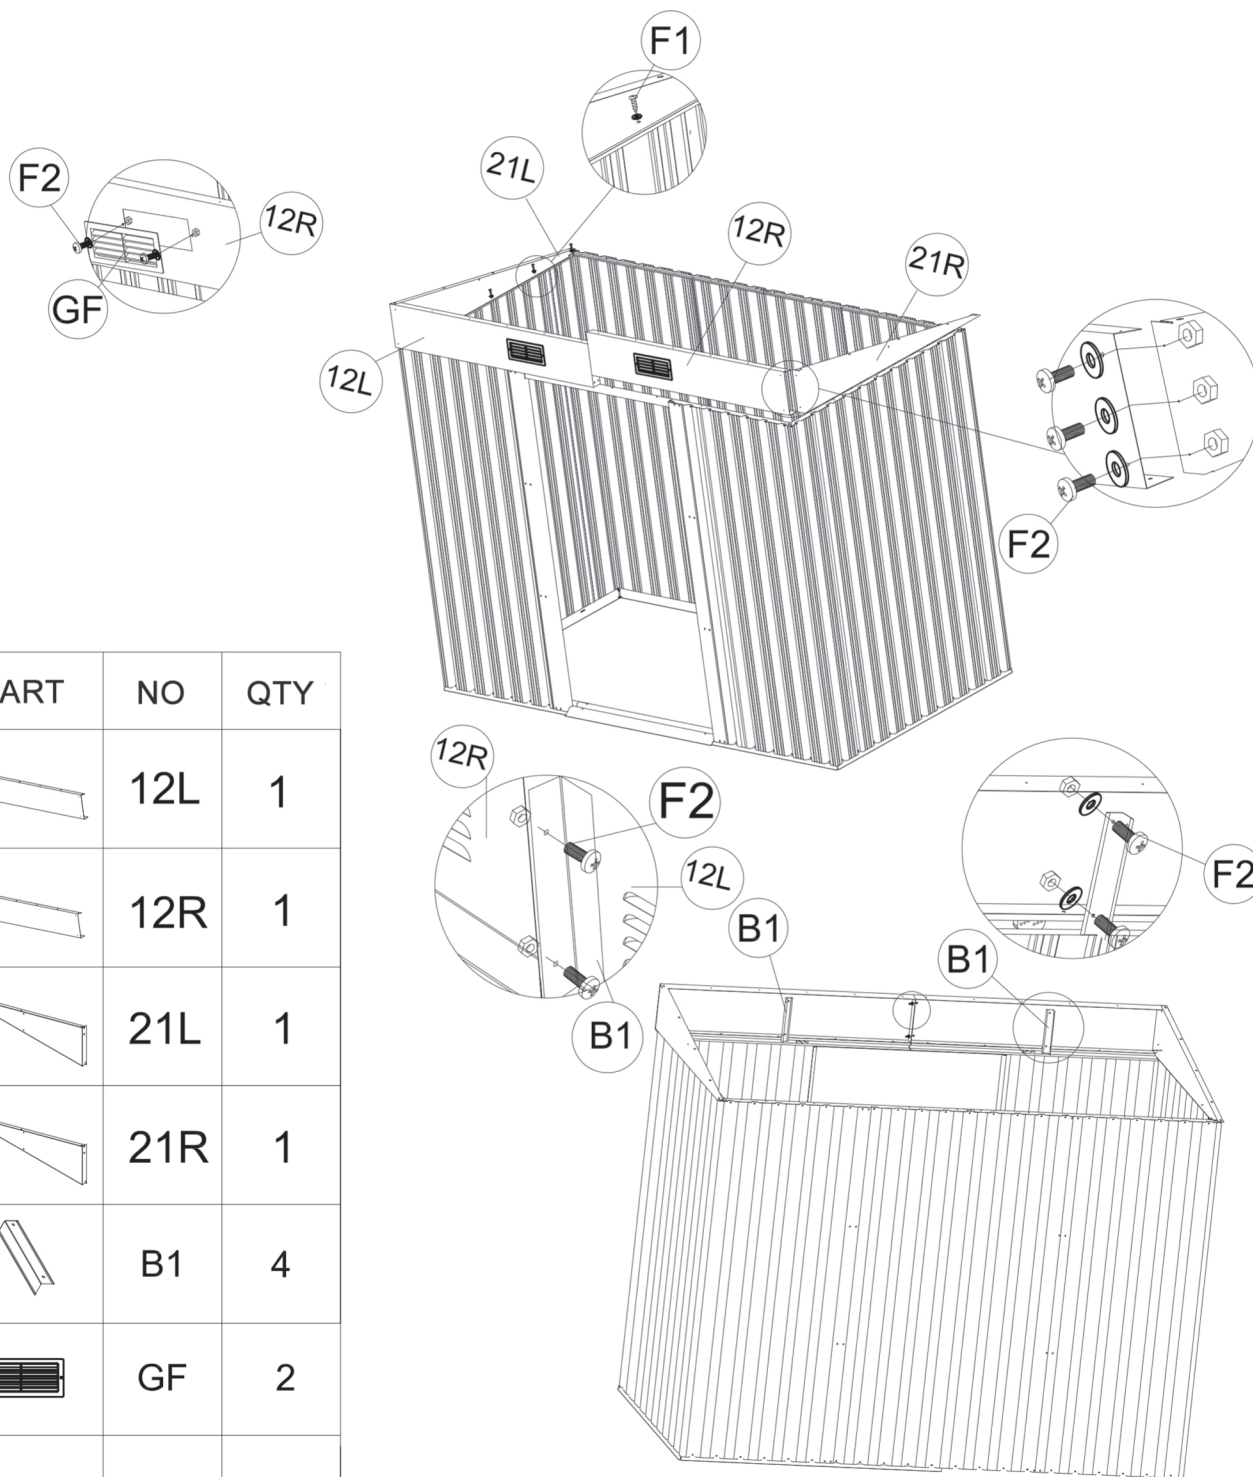







PART	NO	QTY
	12L	1
	12R	1
	21L	1
	21R	1
	B1	4
	GF	2
	F1S2	14
	F2S2	16

7

Place the roof panels P5, P6 and P7) on top of the gable panels and roof supports. Line up the holes and fasten with screws and washers F1 from the inside. Cap the screws with S1 for safety.

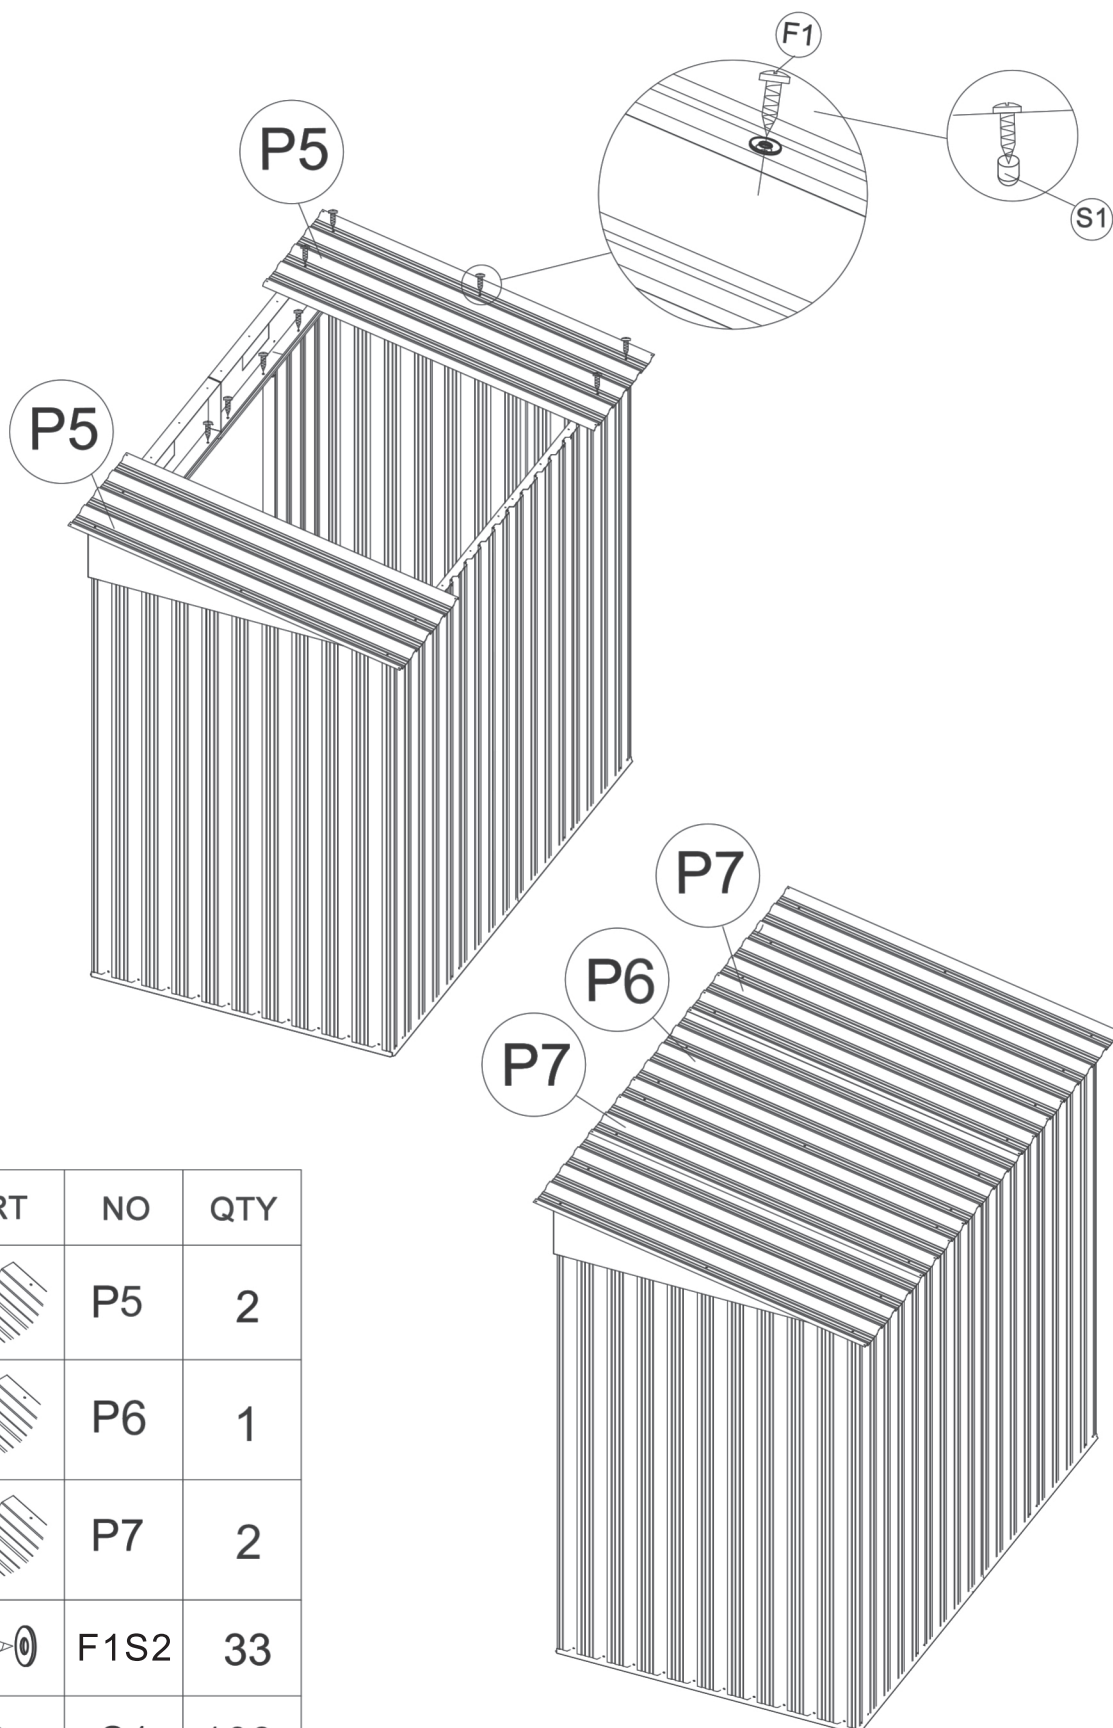
NOTE: Make sure that the roof panels are overlapping each other.



PART	NO	QTY
	P5	2
	P6	1
	P7	2
	F1S2	33
	S1	108

8


Attach the roof flashings (15 and 17) to the roof panels and secure with screws and washers F1. The place four top corner brackets (GC) on the joints and secure with screws and washers F1.

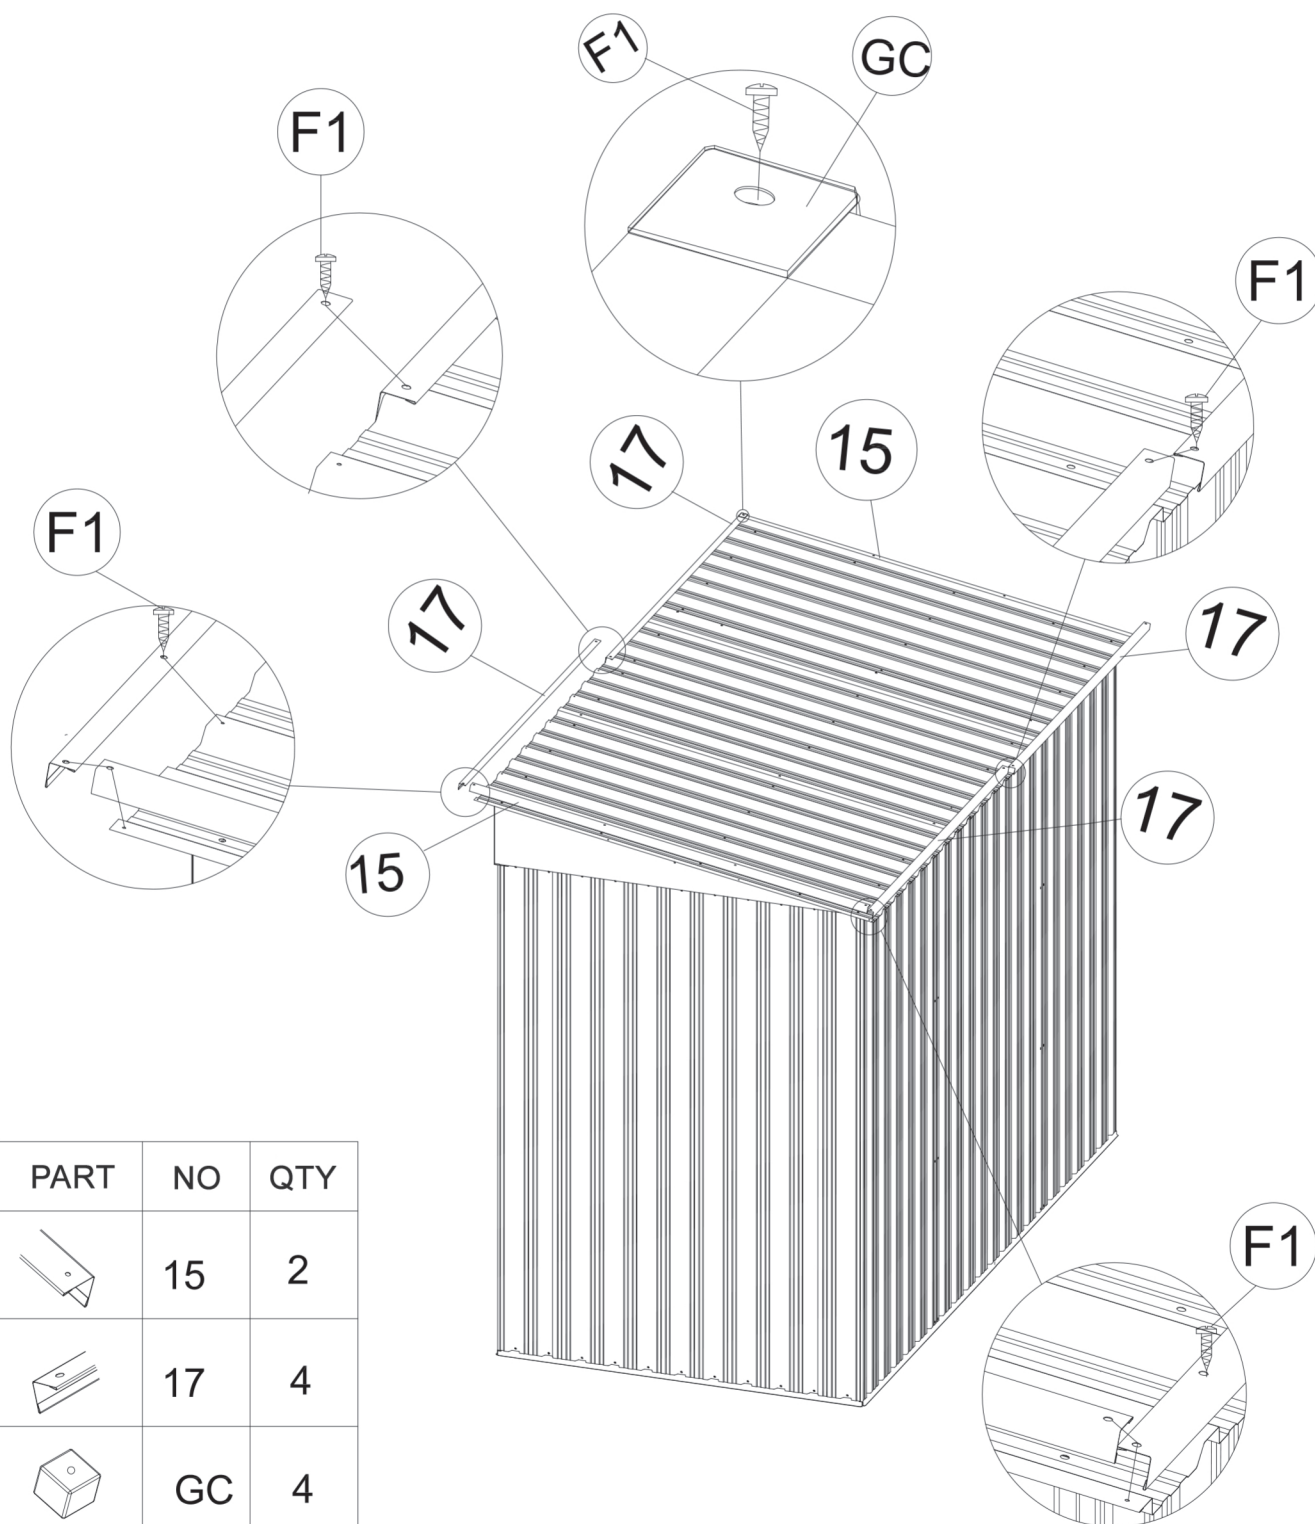





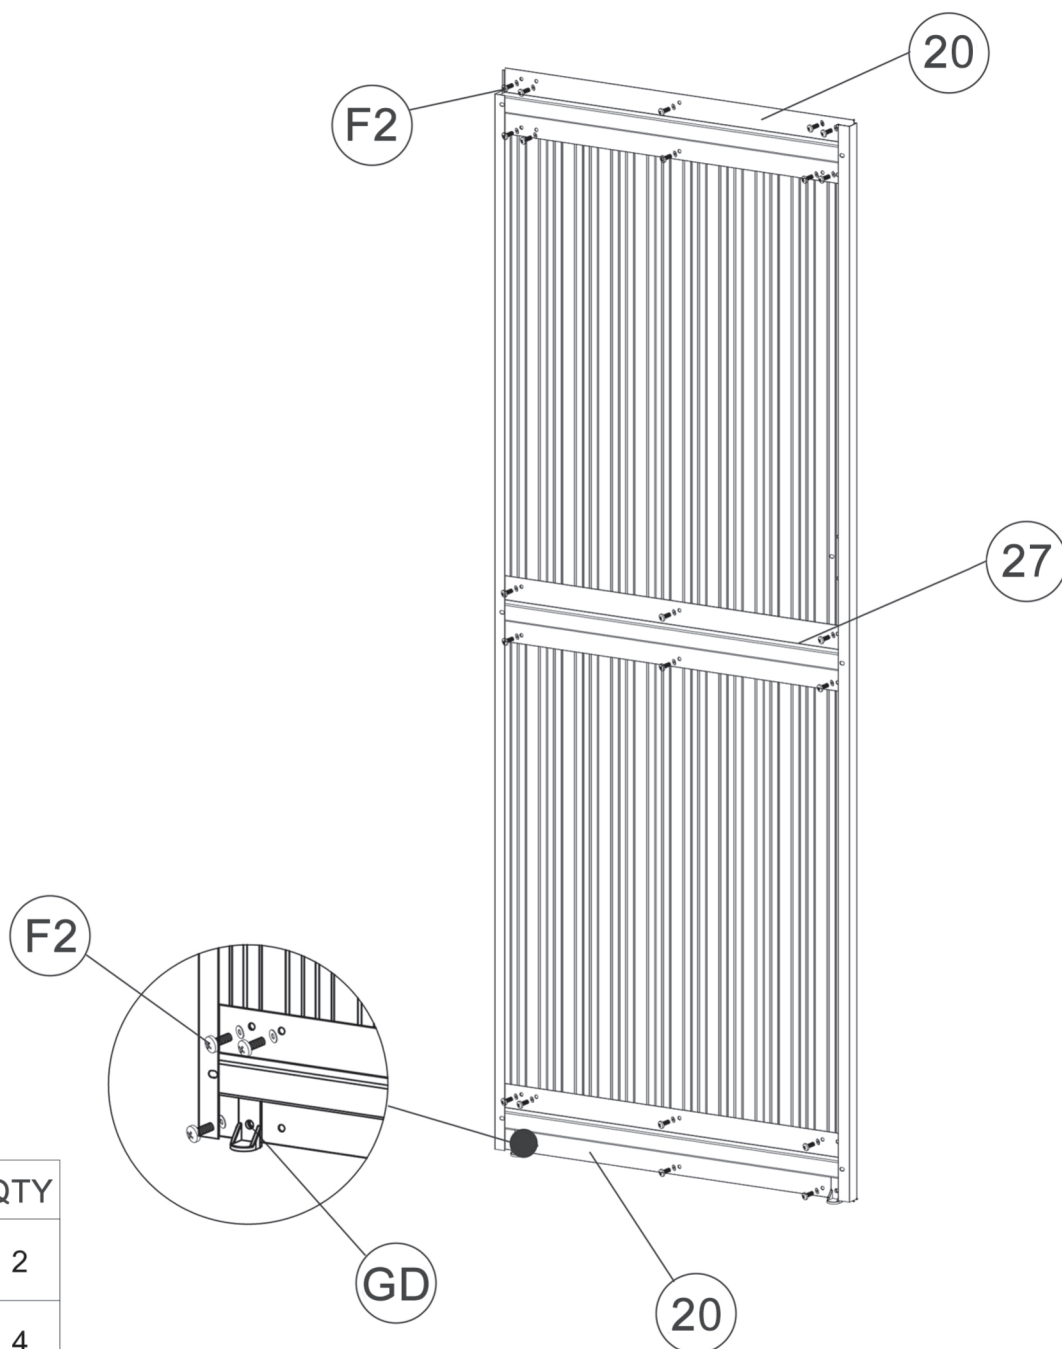

PART	NO	QTY
	15	2
	17	4
	GC	4
	F1S2	6

9


Attach the door bars (20) to the door panels (D1 and D2). Next, attach door bar (27) to the door panels (D1 and D2). Secure with bolts, nuts and washers F2. Finally, attach the bottom slider (GD) to the bottom door bar as shown with bolts, nuts and washers F2.





PART	NO	QTY
	27	2
	20	4
	D1	1
	D2	1
	GD	4
	F2S2	44

10

Attach two door handles (GB) to the door panels (D2) and secure with bolts, nuts and washers F2.

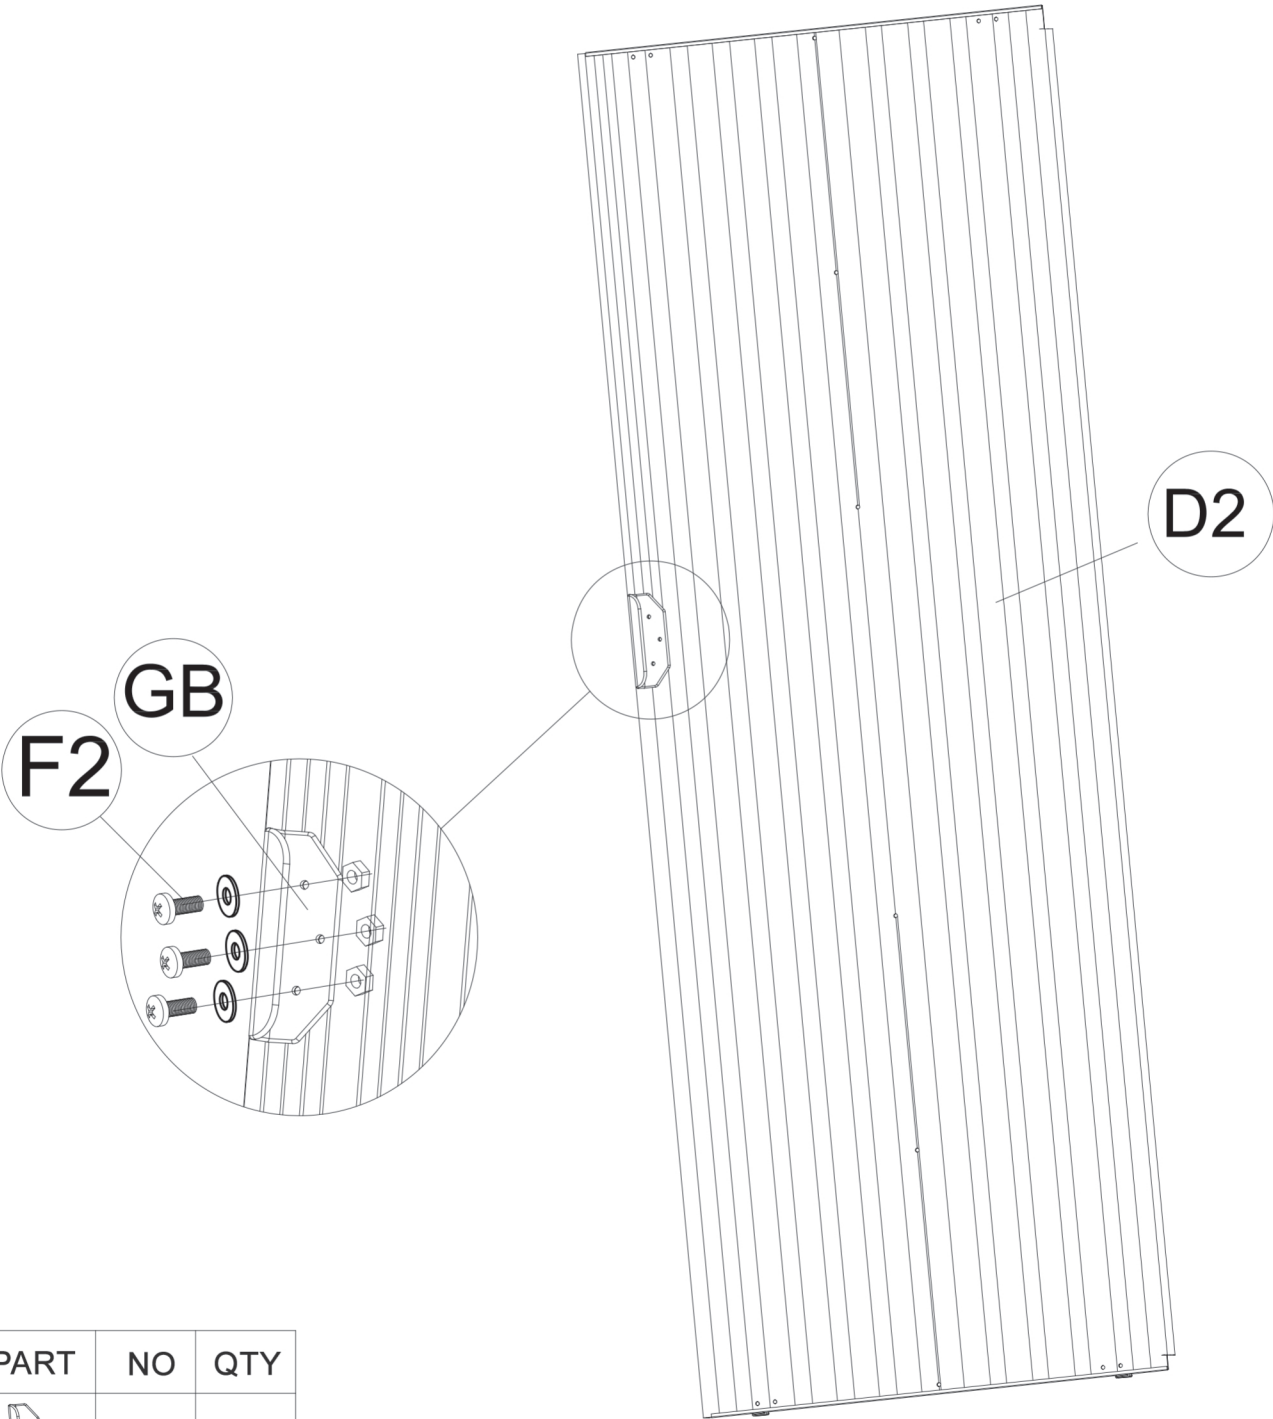



PART	NO	QTY
	GB	2
	F2S2	6

11

Slide the door panel assembly into the base bar (3L). Make sure that the bottom slider (GD) is sliding inside the base bar (3L). Then attach the top door panel to the top slider (G2) with screws F3.

NOTE: Make sure all holes are aligned before securing with screws.

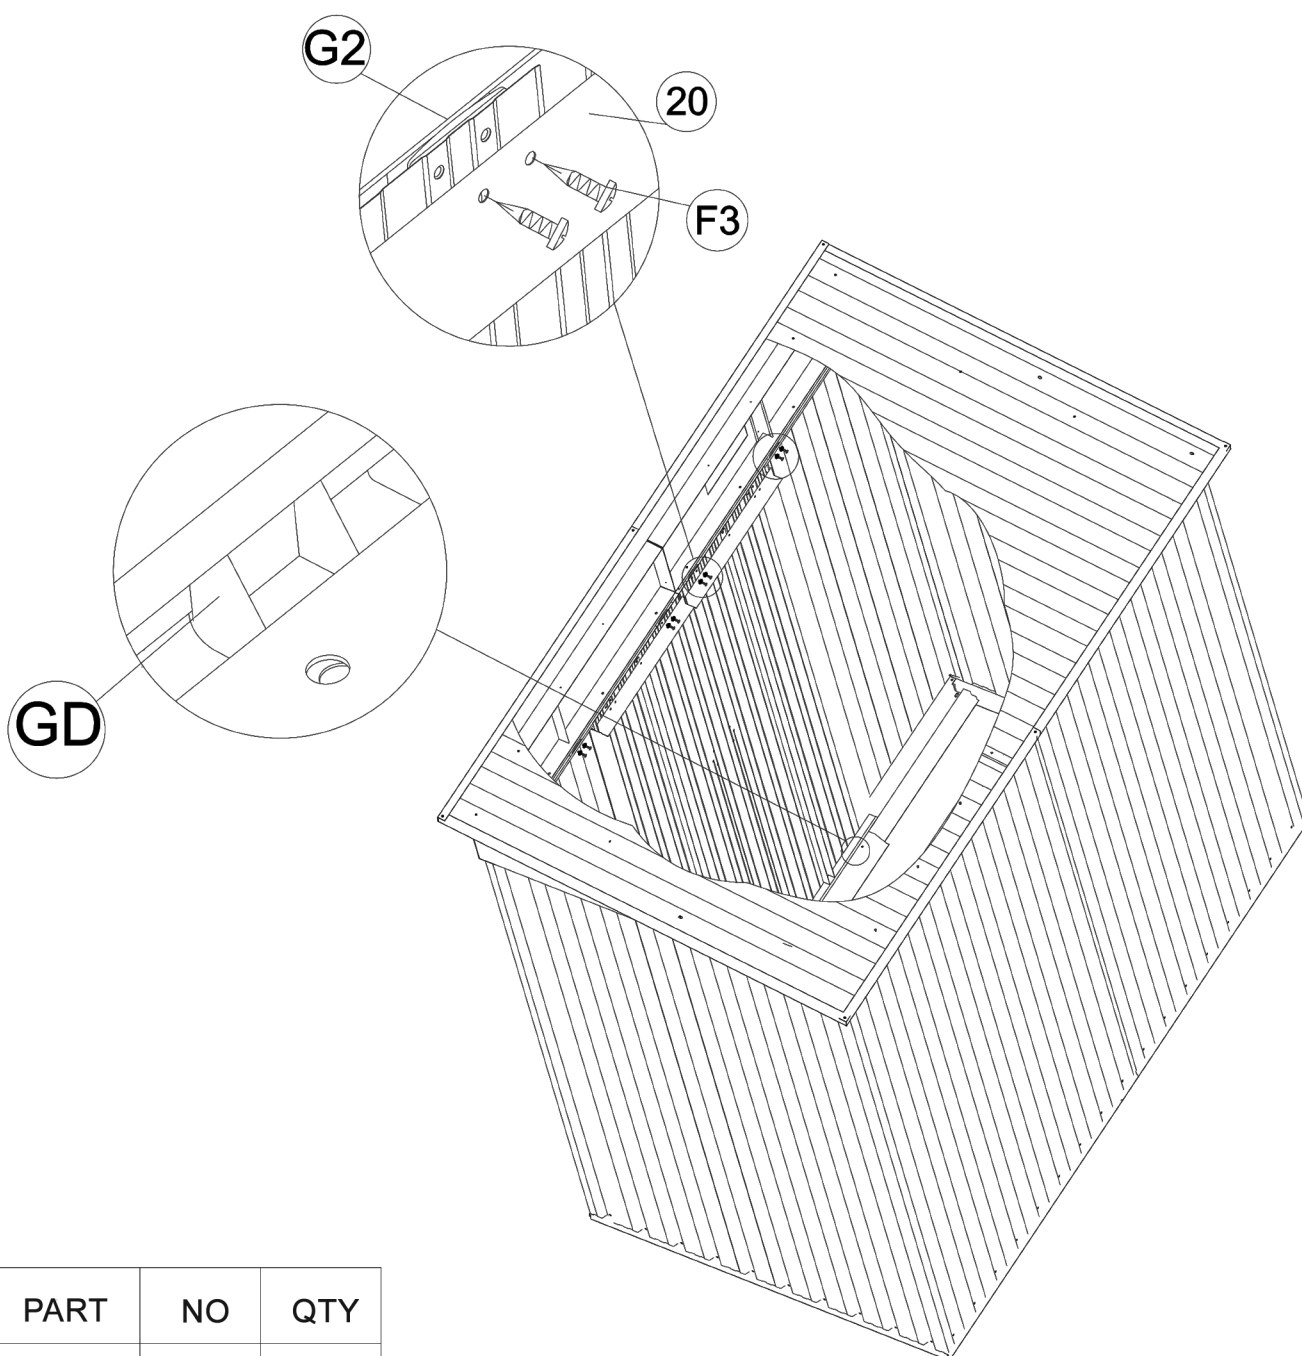

PART	NO	QTY
	F3	8