



Fittings


			9		
A M8X40mm Bolt 10 pcs	B M8X30mm Bolt 8 pcs	C M8X16mm Bolt 4 pcs	D Plastic washer 8 pcs	E M6X16mm Bolt 10 pcs	(F) M8 nuts 6 pcs
e l		\bigcirc	())anannannan		
G Spanner 1 pc	(H) M8 Allen Key 1 pc	D Flat Washer 8 pcs	(P)4. 0X50mm Screw 4 pcs	W M6 Allen Key 1 pc	Y M8X65mm Bolt 4 pcs
Barrennesser-	° °				
Q 3. 0X16mm Screw 8 pcs	O Plastic Spacer 4 pcs	(M) Spring washer 8 pcs			


Please refer to the instruction words before installing it.

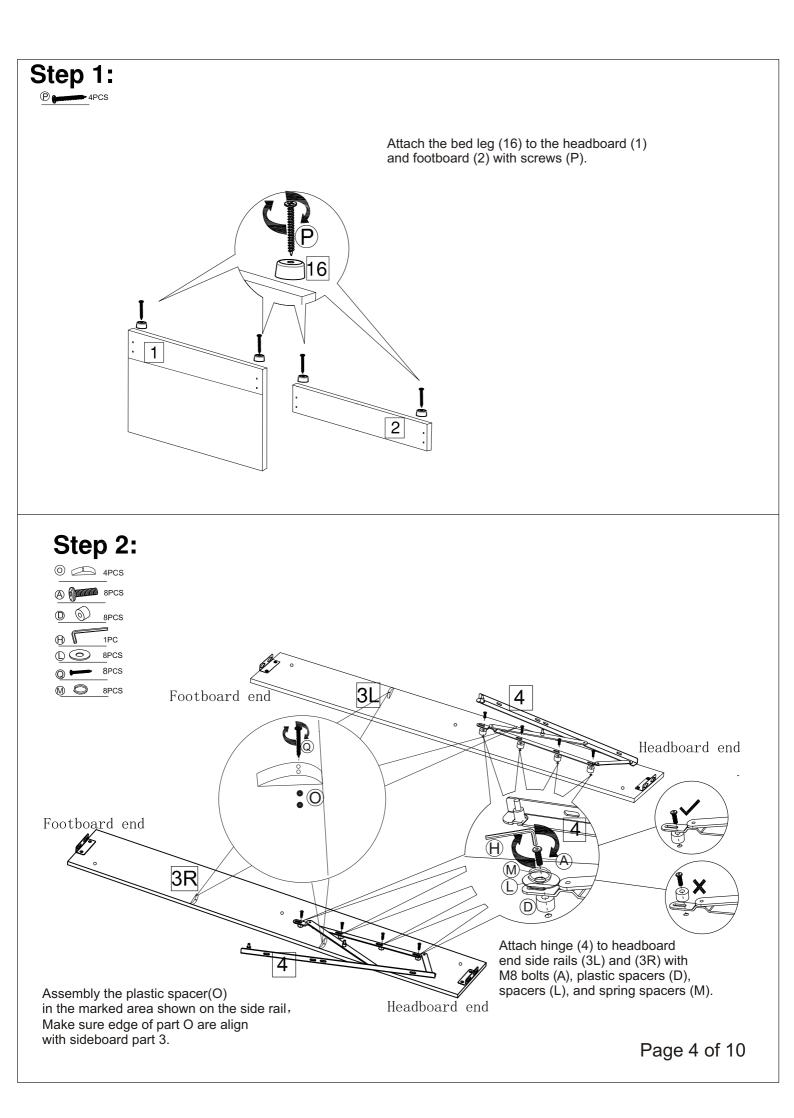


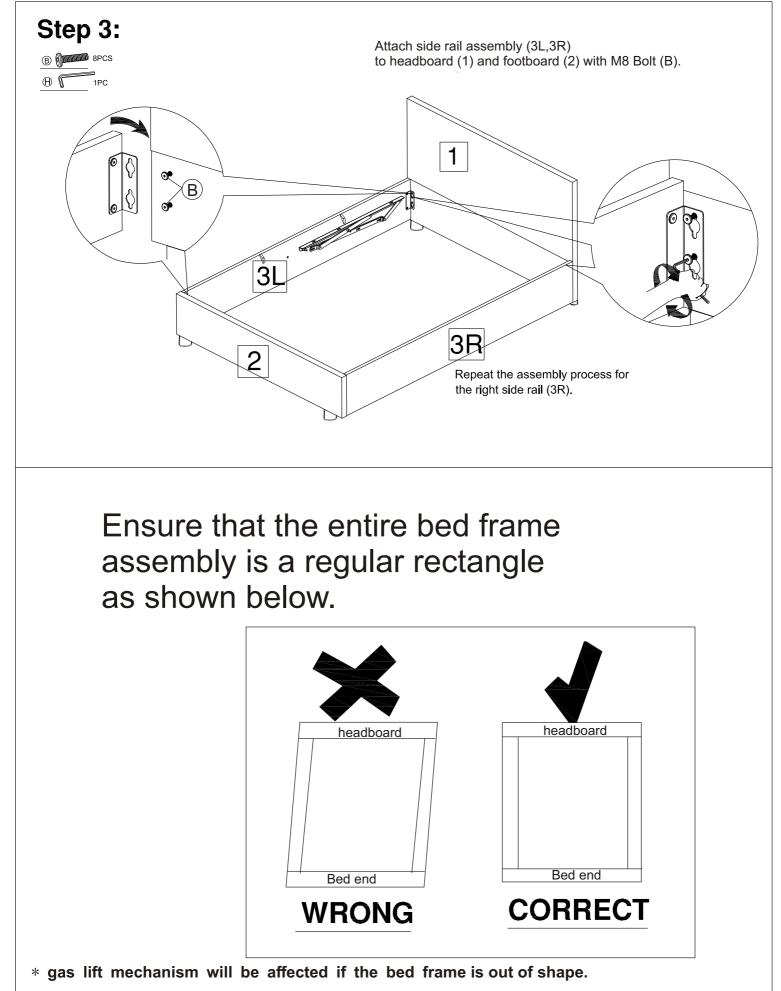

Page 5 of 10

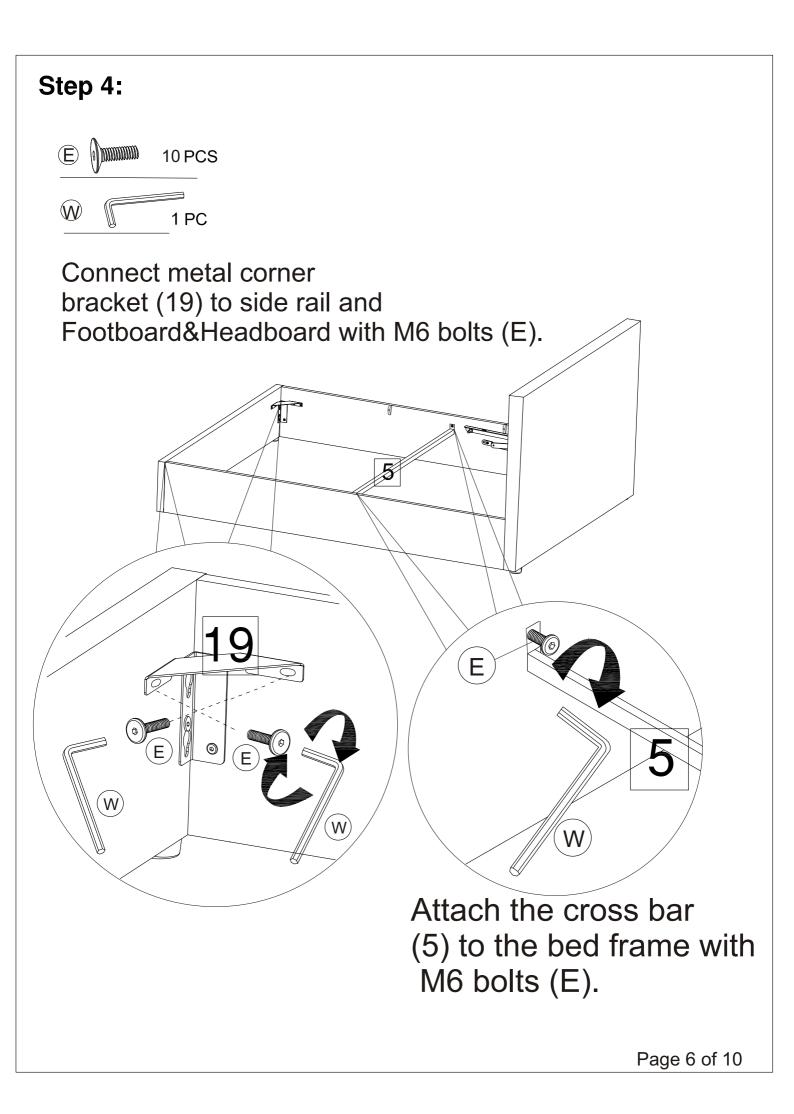


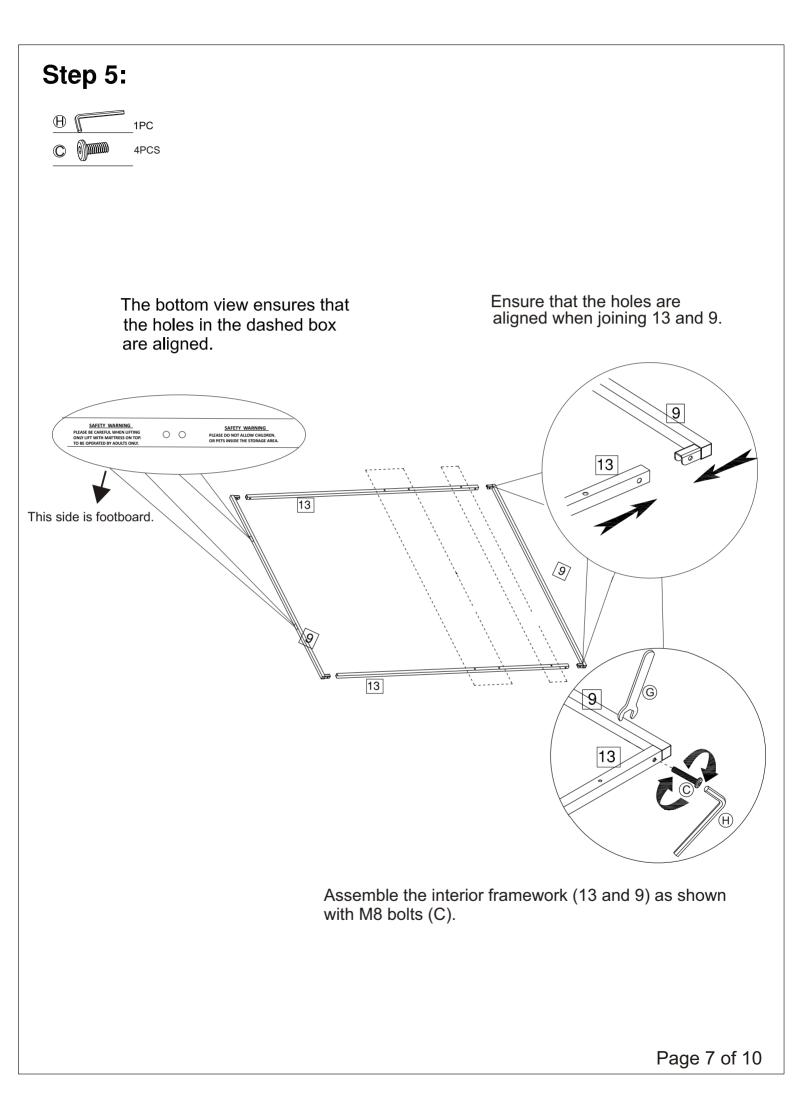

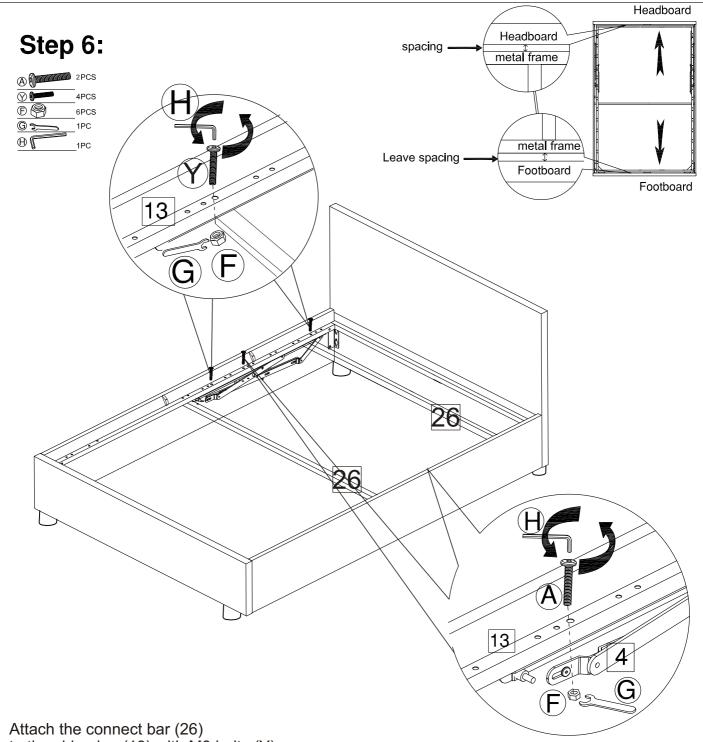

to the side pipe (13) with M8 bolts (Y) and M8 nuts(F) as shown.

First, use the M8 bolts (A) and M8 nuts (F) to connect the side pipe (13) to the hinge (4). At this stage, do not fully tighten the M8 bolts (A) to allow for some adjustment between the headboard, footboard and metal frames. There should be some spacing between the headboard, footboard and the metal frames. Once every part is aligned, fully tighten all M8 bolts (A).

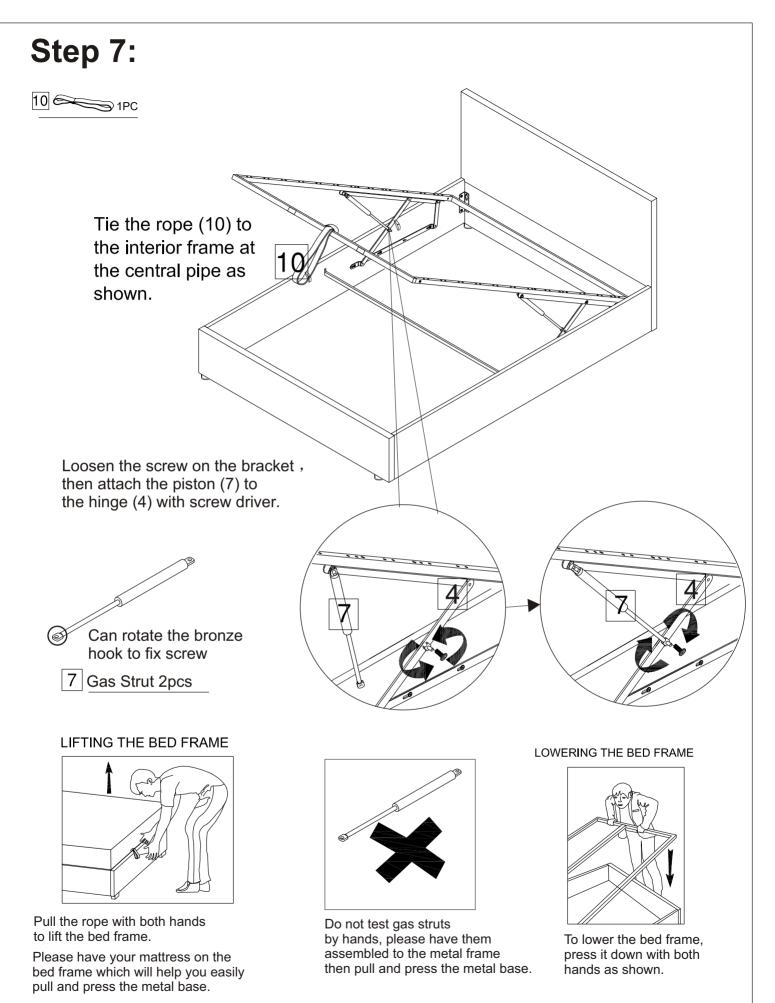

Page 9 of 10

