

Caution: Do not fully tighten the screws until all of them are aligned properly with the holes. If the legs are uneven on the ground during assembly, loosen some screws and add some pressure on the frame to ensure the legs are even. Then tighten the screws diagonally.

SKU:OPS-TXL-3PC

Table Manual



ASAMBLARE MASA:

The image shows four assembly diagrams (I, II, III, IV) and a list of components (A, B, C, D, E, F, G) with their respective quantities. Diagram I shows the top view of the table top with pre-drilled holes. Diagram II shows the side view of the table top with legs attached. Diagram III shows the top view of the table top with legs attached, showing the central support structure. Diagram IV shows the side view of the table top with legs attached, showing the central support structure. The components are: A (Screws for the table top), B (Legs), C (Central support structure), D (Screws for the central support structure), E (Screws for the legs), F (Screws for the table top), and G (Screws for the legs).

Continut pachet componente asamblare masa:

A		1x
B		4x
C		2x
D		8x
E		8x
F		1x
G		8x

Warning: Don't let the product fully expose under the Sun or in rain in long time, The tempered glass might explode and the lifespan textile will be reduced under prolonged sunshine and raining.


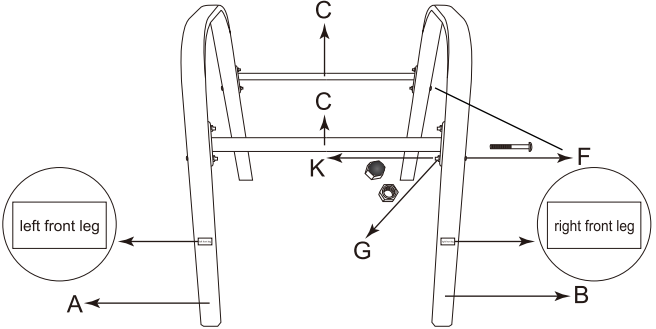



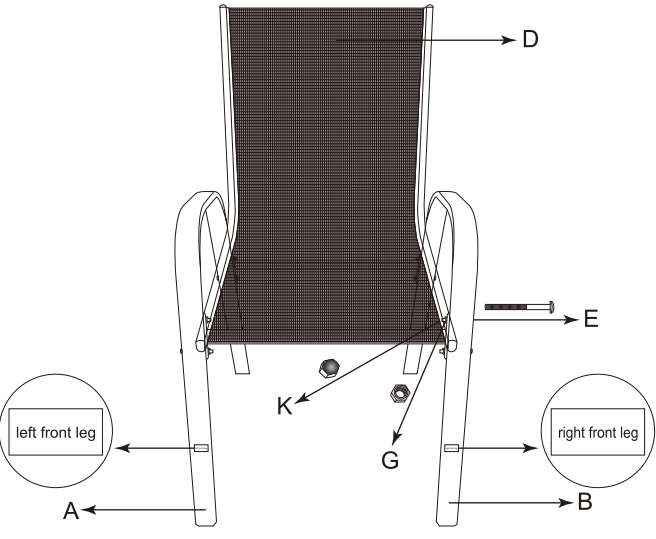



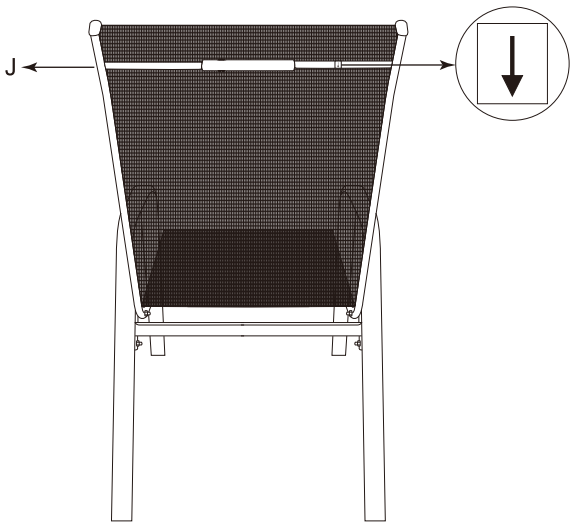



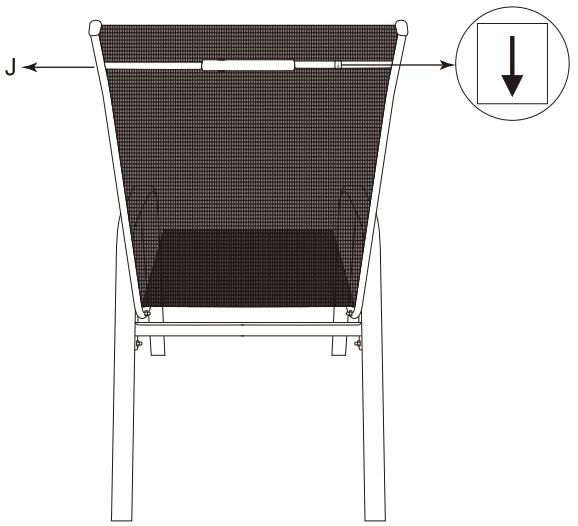

Assembly Instructions

OPS-TXL-CH



Do not fully tighten the screws until all of them are aligned properly with the holes.

If the legs are uneven on the ground during assembly, loosen some screws and add some pressure on the frame to ensure the legs are even. Then tighten the screws diagonally.

A	 left front leg	1PCS	
B	 right front leg	1PCS	
C		2PCS	
D		1PCS	
E	 6x70mm	4PCS	
F	 6x55mm	4PCS	
G		8PCS	
H		1PCS	
I		1PCS	
J		1PCS	
K		8PCS	

1. Install legs together and fasten screw, it is very important that make sure 4 feet be on the same horizontal plane, it is not allowed that each one foot is higher or lower

2. Fix the seat board with chair legs, pls distinguish front leg from rear leg.

3. Fasten back bar. Adjust the length of bar to fit the hole site of chair back. Tighten it in the direction of the arrow.

Don't let the product fully expose under the Sun or in rain.

The lifespan will shorten under prolonged sunshine and raining.