




# GARDEN SHED

MODEL: GS-4X8-GY

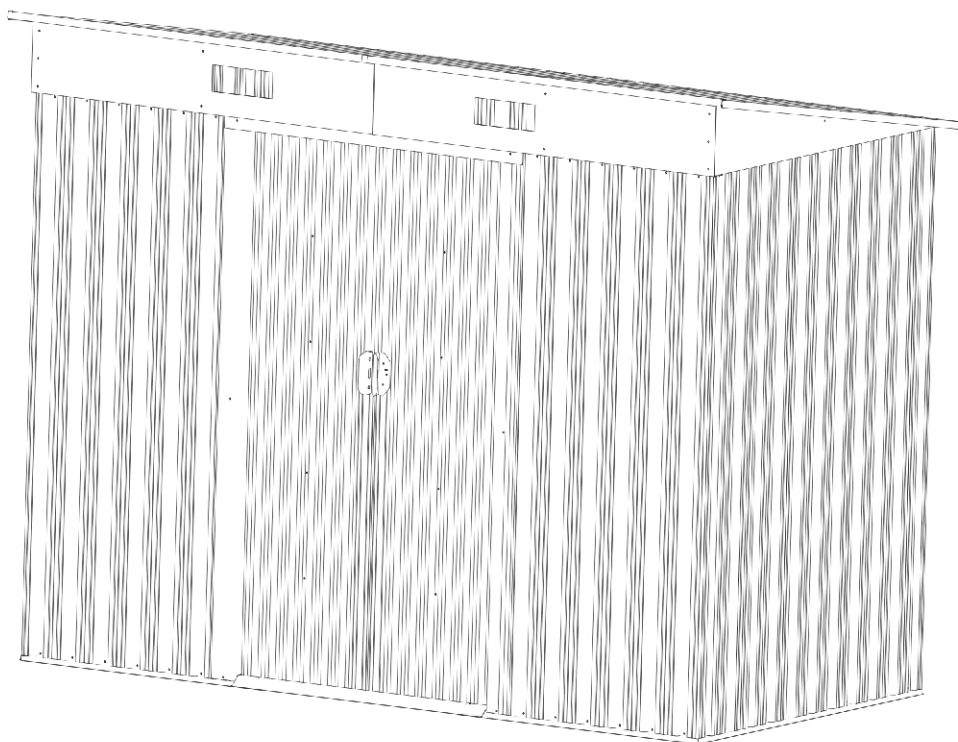

## ASSEMBLY INSTRUCTIONS

- Please read these instructions carefully before starting assembly.
- Assembly must be done strictly in accordance with these instructions
- Please check to ensure that all parts are included in the packaging.
- To avoid injury, please use work gloves to perform the assembly.
- It is recommended that assembly be done by two persons.
- Assembly duration is about 2 to 3 hours.

# BEFORE ASSEMBLY

## Assembly instructions

Before starting assembly, check local building codes regarding footings, locations and other requirements. Study and understand these assembly instructions. Important information and helpful tips will make your assembly easier and more hassle-free. This manual contains all the appropriate information for assembling your product. Review all instructions before you begin and during assembly. Follow the sequence carefully for correct results.

## Parts and Parts list

Check the list for all necessary parts. Separate the contents by part number when reviewing the parts list. The first few steps will show how to join related parts to make larger sub assemblies that will be used later. Familiarise yourself with the hardware and fasteners for easier use during assembly. Extra fasteners are provided for your convenience.

# PLAN AHEAD

## Check weather

Be sure that the day you select to assemble the shed is dry and calm. Do not attempt to assemble the shed on a windy day. Be careful on wet or muddy ground.

## Teamwork

Whenever possible, two or more persons should work together to assemble the shed. One person can position parts or panels while the other is able to handle the fasteners and tools.

## Tools and materials

There are some basic tools and materials needed for the assembly. Decide which method of anchoring and the type of foundation you wish to use in order to form a complete list materials that you will need.

# CARE AND MAINTENANCE

## Finish

For long-lasting finish, periodically clean and wax the exterior surface. Touch up scratches as soon as you notice them. Immediately clean the area with a wire brush. Then wash it and apply touch-up paint as per the paint manufacturer's recommendations.

## Doors and roof

Always keep the door tracks clear of dirt and other debris that prevent them from sliding easily. Lubricate door tracks annually with furniture polish or silicone spray. Keep doors closed and locked to prevent wind damage. Keep the roof clear of leaves and debris with a long-handle, soft-bristle broom.

## Fasteners

Use all washers supplied to protect against weather infiltration and protect the metal from being scratched by screws. Regularly check the shed for loose screws, bolts and nuts and re-tighten as necessary.

## Moisture

A plastic sheet (vapour barrier) placed under the entire floor area with good ventilation will help to reduce condensation.


















## Attention
















Do not store swimming pool chemicals in the shed. Combustibles and corrosive solvents must be stored in air-tight approved containers.












## Tips

Wash off inked part numbers on coated panels with soap and water. Silicone caulking may be used for watertight seals throughout the shed.


# PARTS LIST

PART	NO	QTY
	1	2
	3L	1
	3R	1
	4L	1
	4R	1
	5	1
	6	1
	7	1
	8	1
	9	1
	10L	1
	10R	1
	11	1
	12L	1
	12R	1
	15	2
	17	4

PART	NO	QTY
	20	4
	21L	1
	21R	1
	25L	1
	25R	1
	27	2
	B1	4
	P1A	6
	P1	2
	P2	4
	P3	4
	P5	3
	P6	1
	P7	2
	D1	1

PART	NO	QTY
	D2	1
	GF	2
	G2	4
	GB	2
	GC	4
	GD	4
 M4X10	F1	226
 M4X10	F2S2	55
 M5X16	F3	8
	S1	175
	S2	300


# PARTS

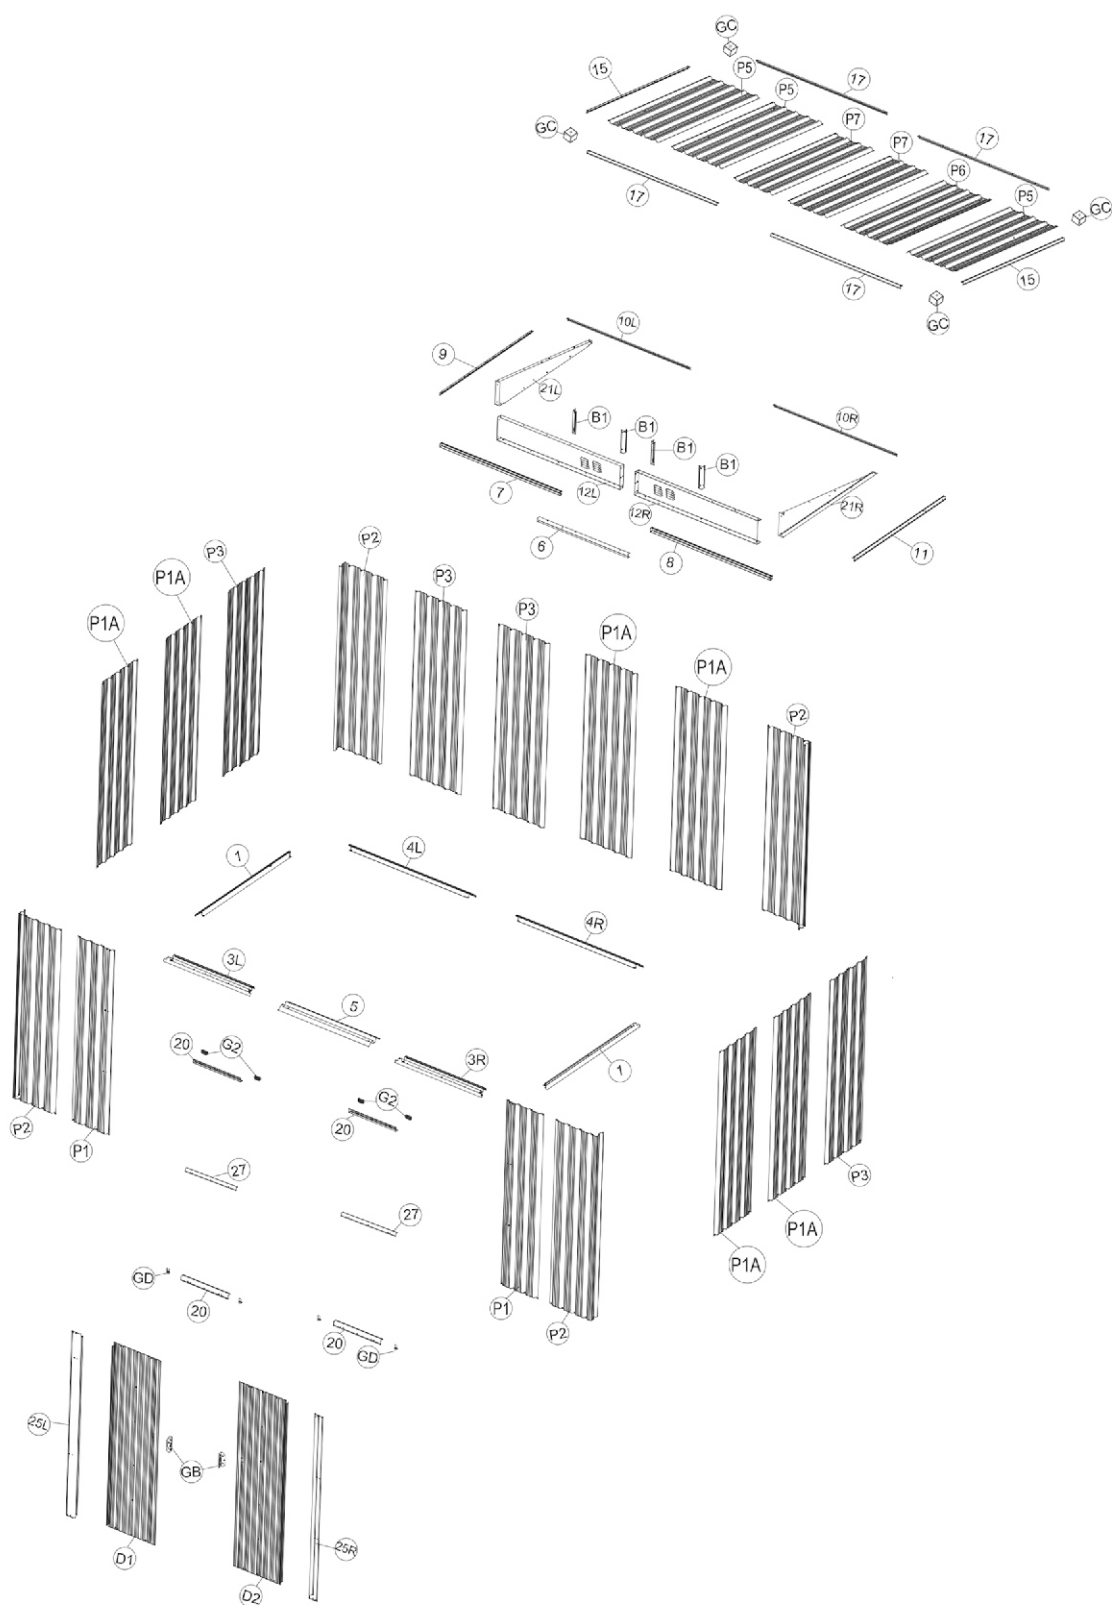








# 1

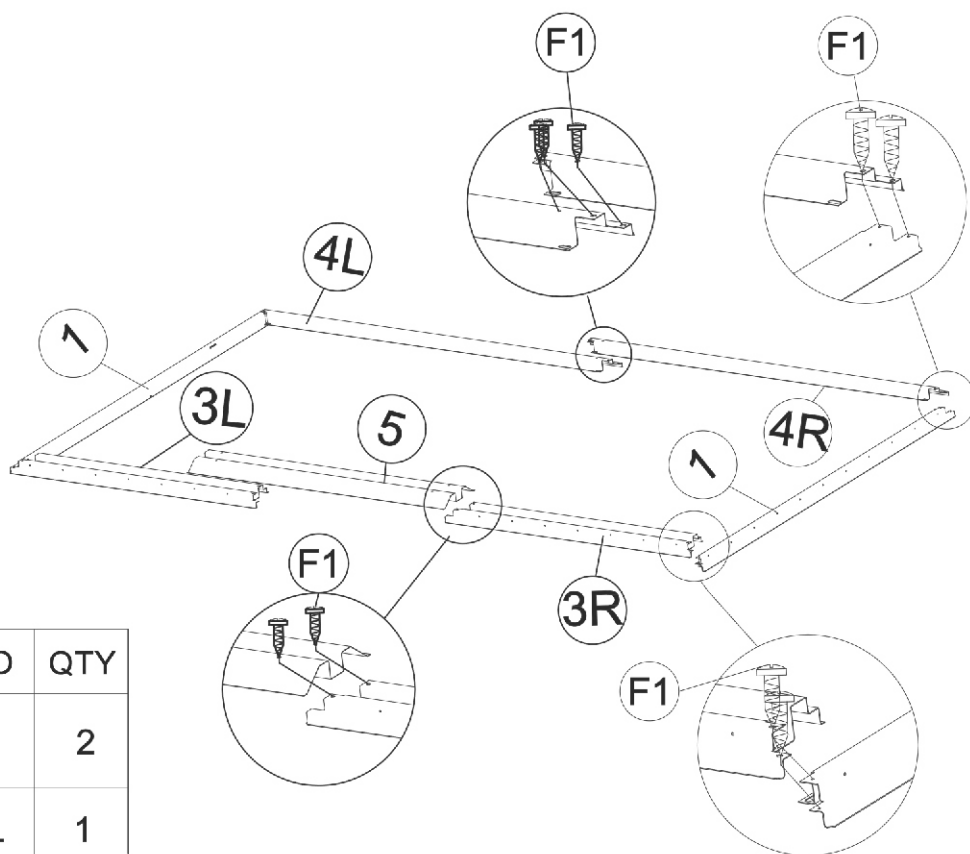Assemble the base bars (1 to 4L) with screws F1. Next, place the entrance taper channel (5) on top of the bars (3L and 3R). Secure with screws F1 to the base as shown. Ensure that the base bar assembly is a perfect rectangle.


NOTE: Beware of sharp edges.







PART	NO	QTY
	1	2
	3L	1
	3R	1
	4L	1
	4R	1
	5	1
	F1	16

# 2

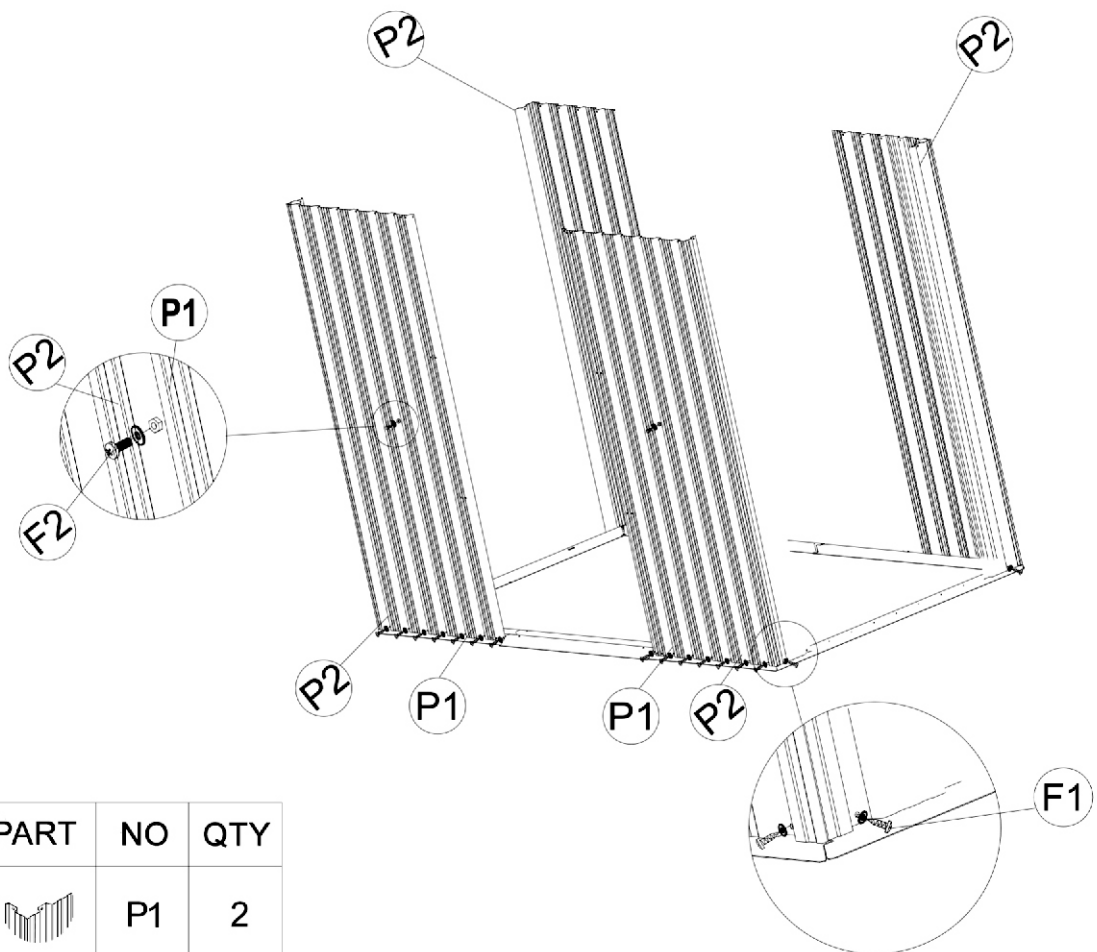Place the wall panels (P1 and P2) on the base bars as shown. At the front, attach P1 and P2 together using bolts, nuts and washers F2. Then secure them to the base bars with screws and washer F1 from the outside.




PART	NO	QTY
	P1	2
	P2	4
	F1S2	20
	F2S2	2






# 3


Insert four top sliders (G2) into the sliding channels (7 and 8) as shown. Attach the door bar (6) between the two front panels (P1 and P2). Then place the sliding channels (7 and 8) on top of the front door panels from the inside. Line up the holes with the wall panels. Fasten with screws and washers F1.

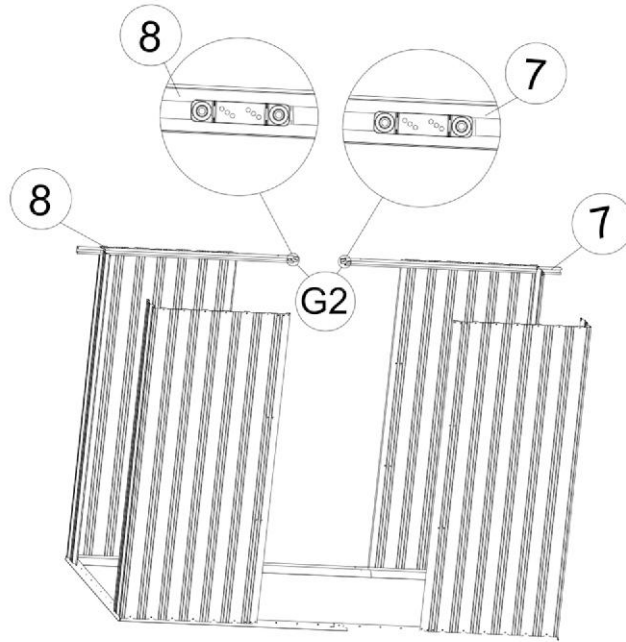There are not pre-drilled holes on part 7 and part 8, but they can be easily fixed with screws F1.




**NOTE:**  
Ensure that the positioning of G2 is of the correct facing.

PART	NO	QTY
	6	1
	7	1
	8	1
	G2	4
	F1	14

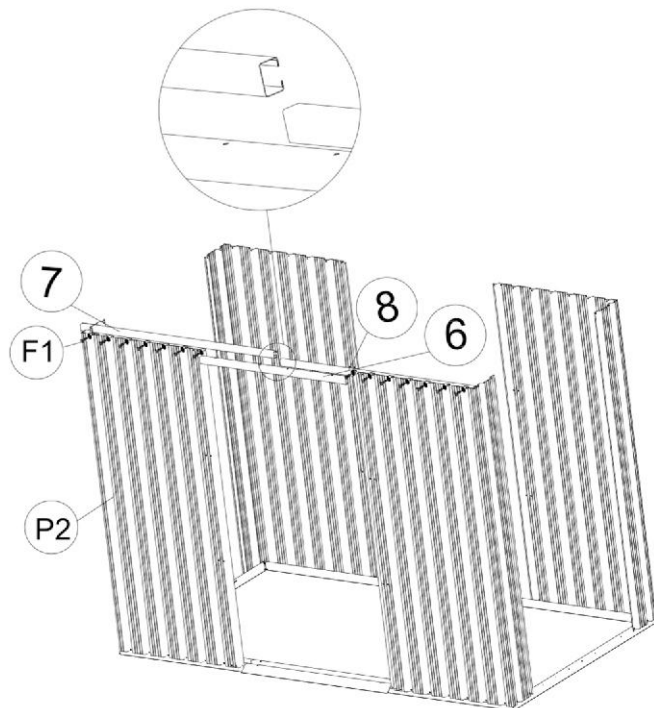





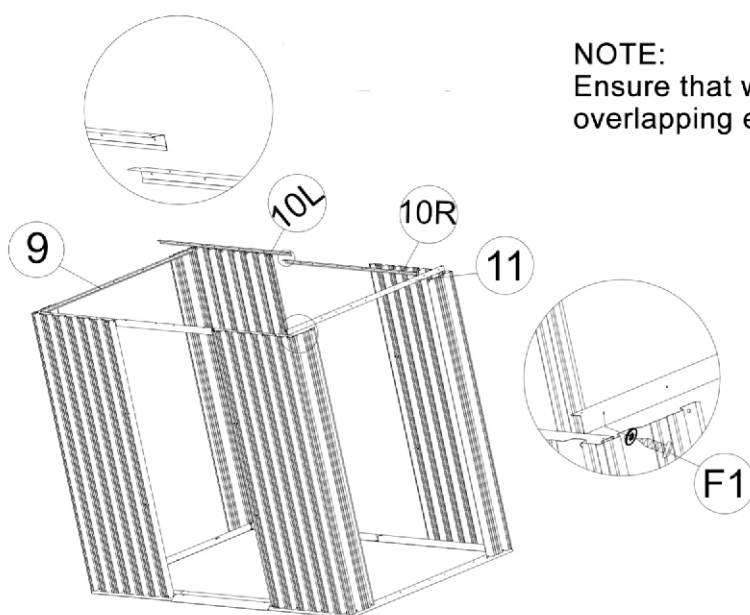




# 4

Place the top angle bars (1, 10L, 10R and 11) on top of the wall panels as shown. Line up the holes with the wall panels and secure the assembly with screws and washers F1. Next, place the wall panels (P1A and P3) between the base bars and the top angle bars. Secure them with screws and washers F1, and nuts, bolts and washers F2.



**NOTE:**  
Ensure that wall panels are overlapping each other.


PART	NO	QTY
	9	1
	10L	1
	10R	1
	11	1
	P1A	6
	P3	4
	F1S2	88
	F2S2	14

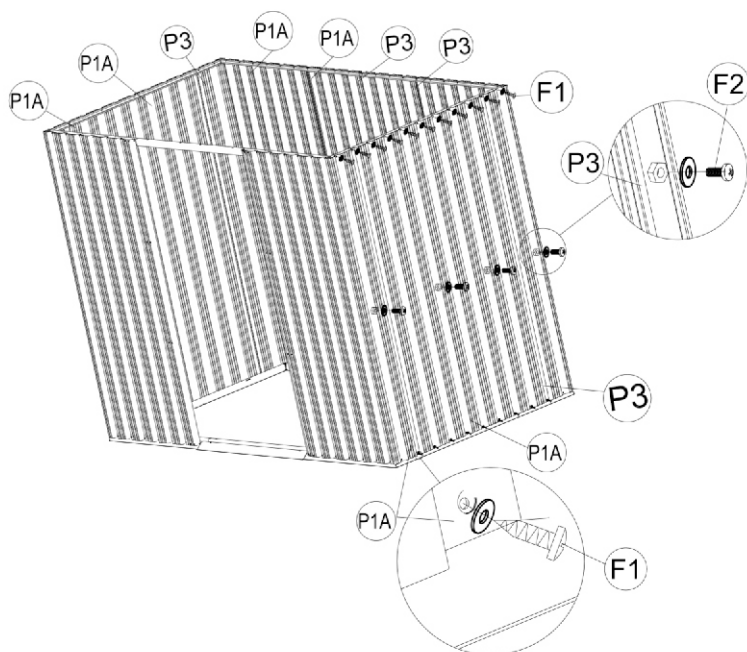






# 5

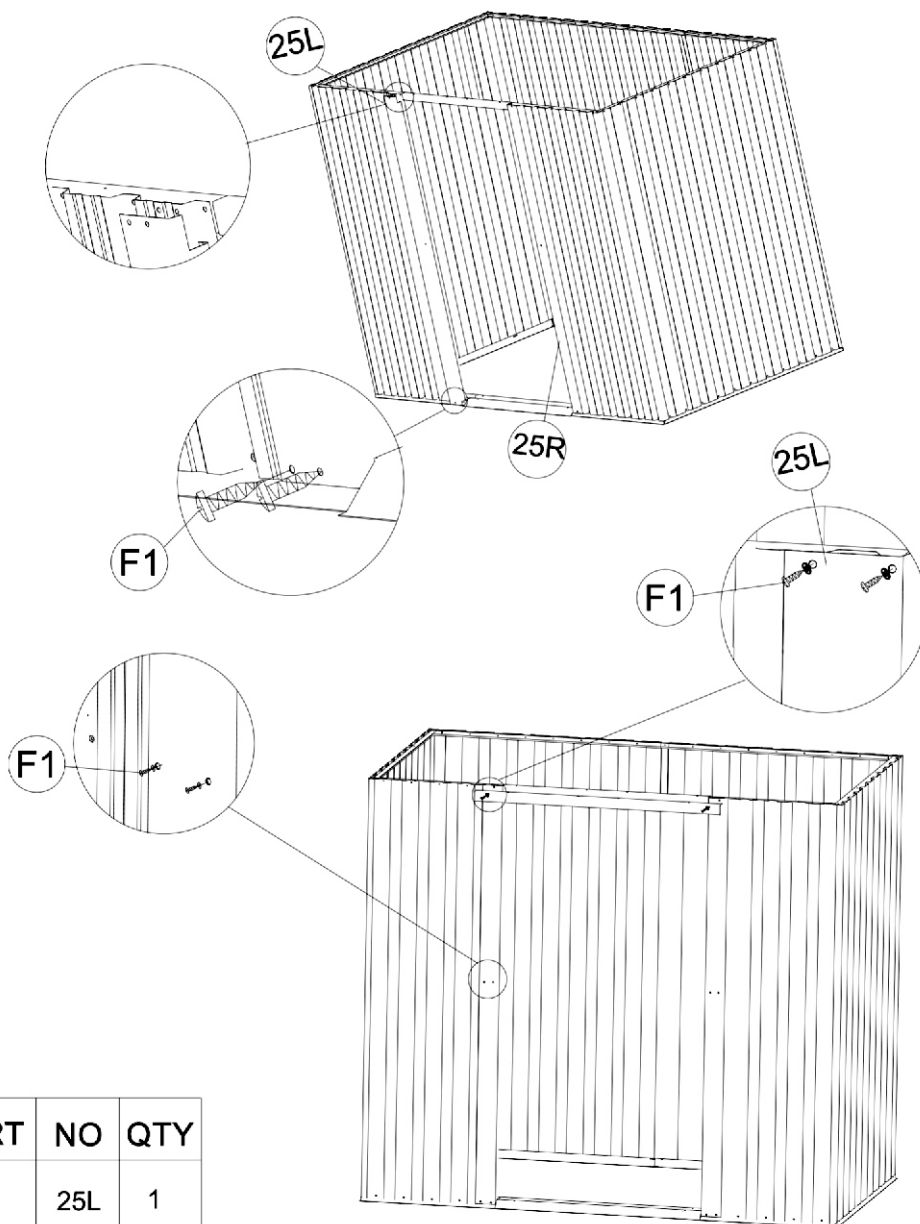
Place the left door column and right door column (25L and 25R) on top of the base bars and secure the door columns to the front wall panels as shown with screws and washers F1,




PART	NO	QTY
	25L	1
	25R	1
	F1S2	12

# 6

Place the gable panels (12R and 21R) on top of the sliding channel (6) and side top bar (9). Align the holes and secure with screws and washers F1. Repeat the steps for 12L and 21L. Next, attach the gable panels to each other with the connectors (B1) and nuts, bolts and washers F2 as shown. Finally, attach the vents (GF) to the front gables (12L and 12R) with nuts, bolts and washers F2.

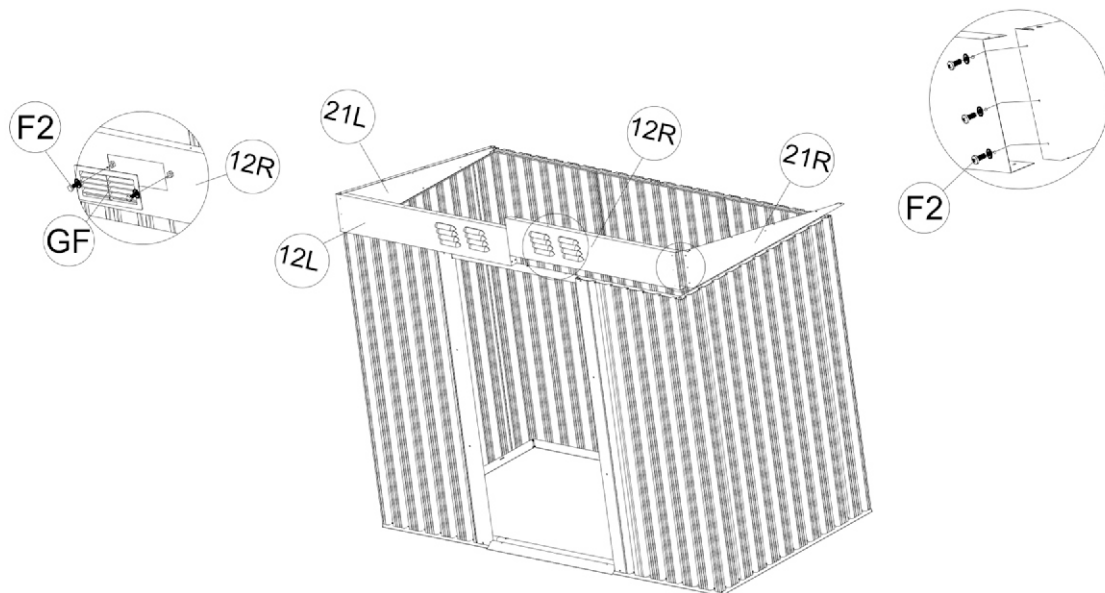



PART	NO	QTY
	12L	1
	12R	1
	21L	1
	21R	1
	B1	4
	GF	2
	F1S2	20
	F2S2	16

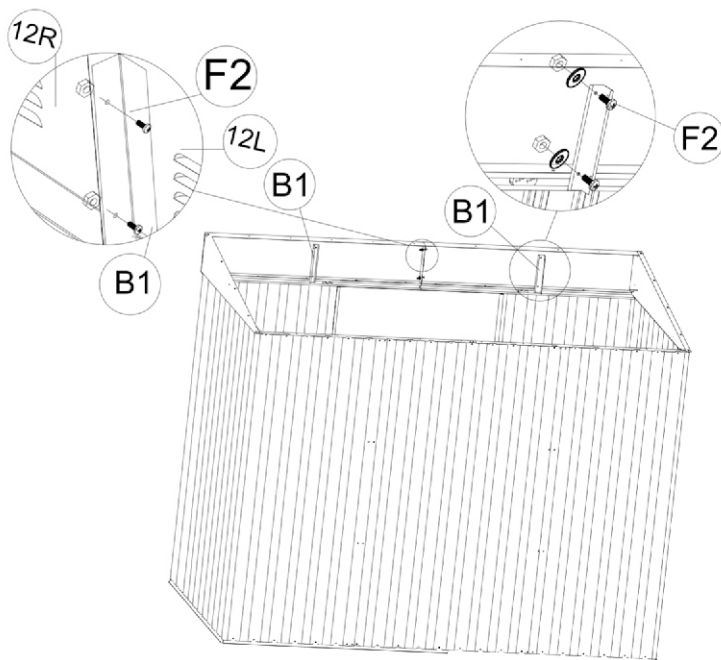






# 7

Place the roof panels (P5, P6 and P7) on top of the gable panels and roof supports. Line up the holes and secure with screws and washers F1. Cap the screws with S1 to prevent any injuries from the sharp screws.

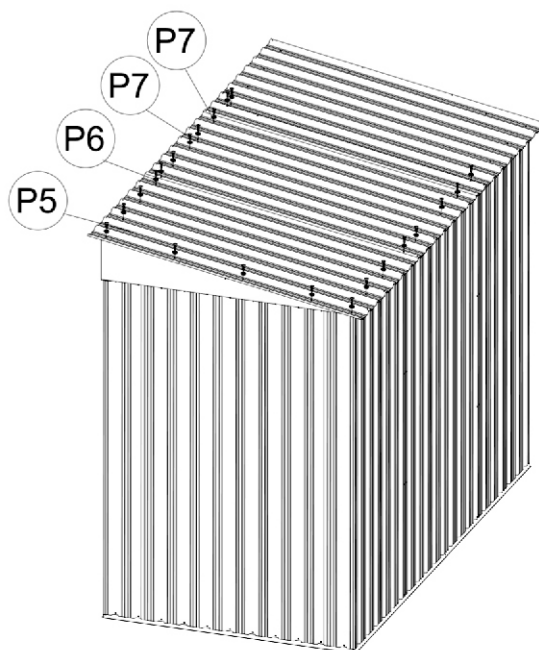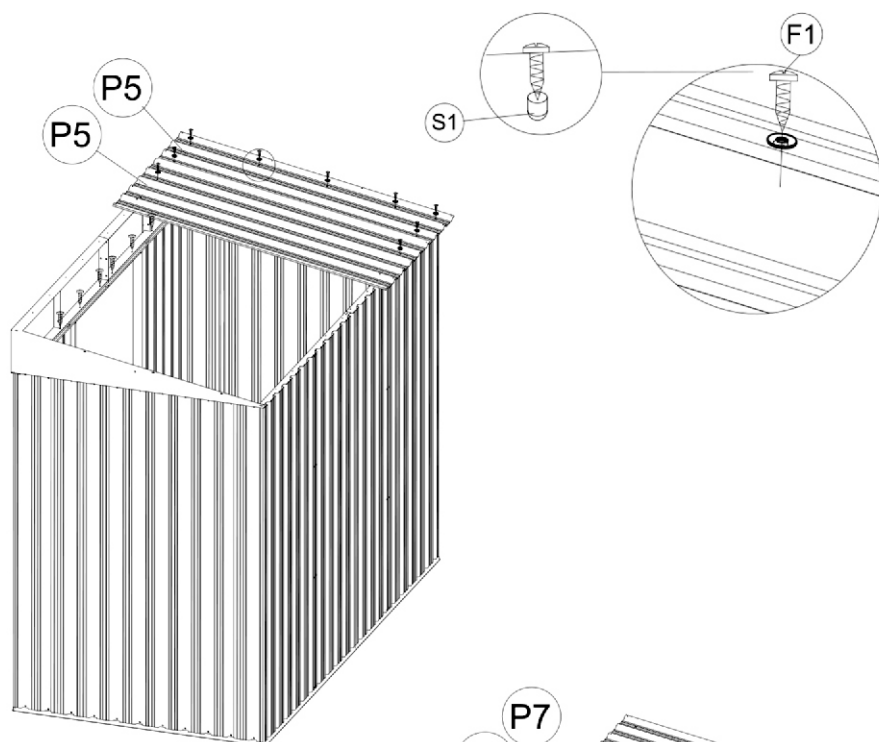
**NOTE:** Ensure that the roof panels are overlapping each other when assembling them.







PART	NO	QTY
	P5	3
	P6	1
	P7	2
	F1S2	46
	S1	175

# 8

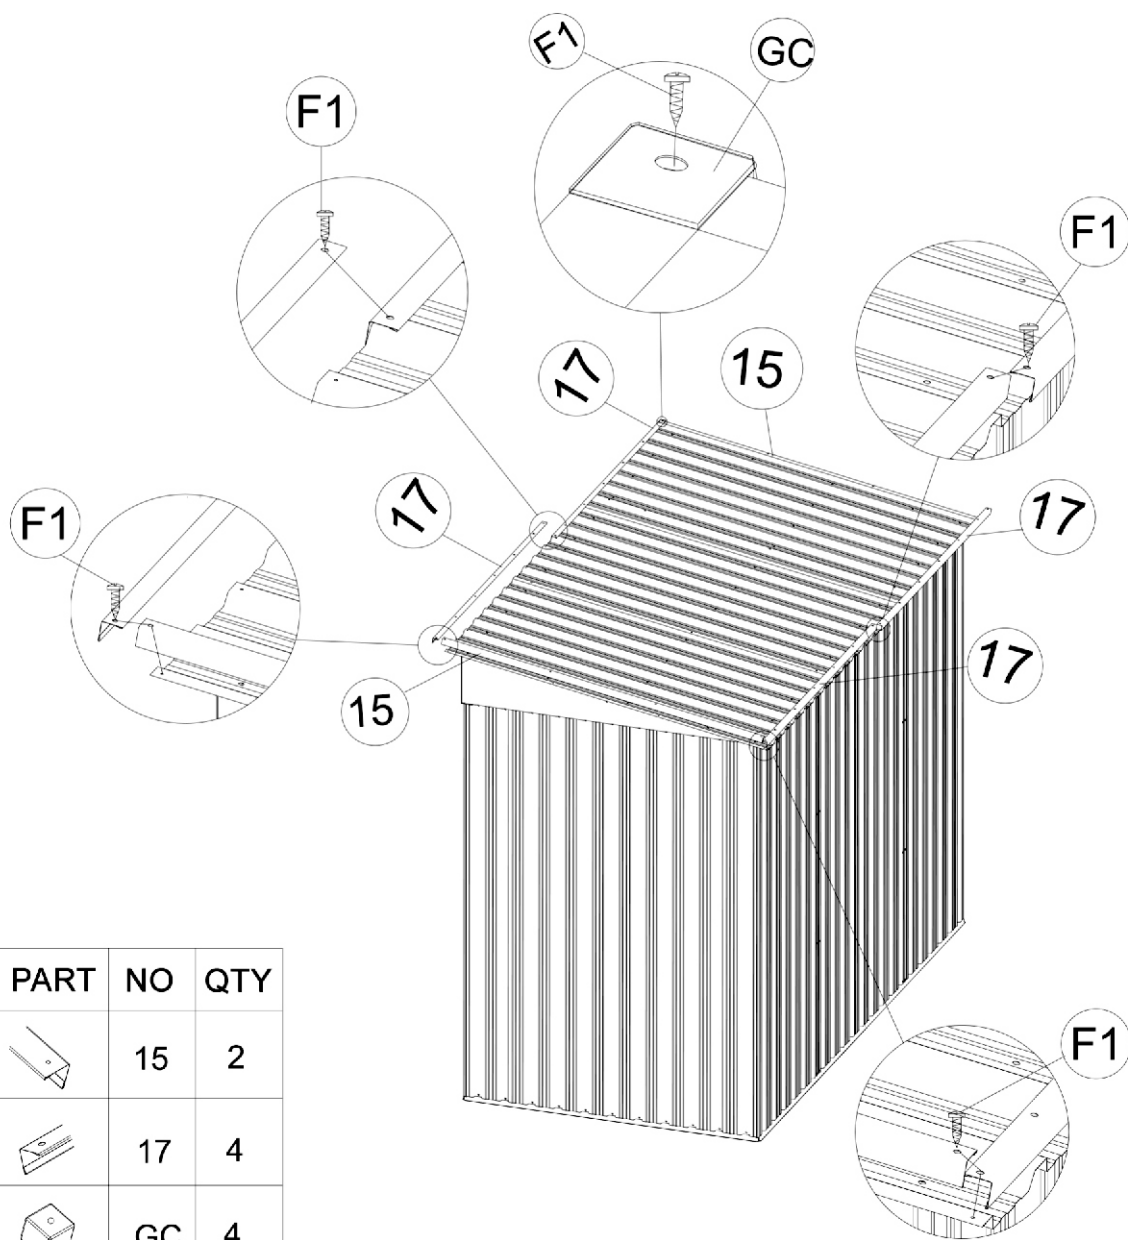
Attach the roof flashings (15 and 17) to the roof panels. Secure with screws and washers F1. Then place four top corner brackets (GC) on the roof joints and secure with screws and washers F1.







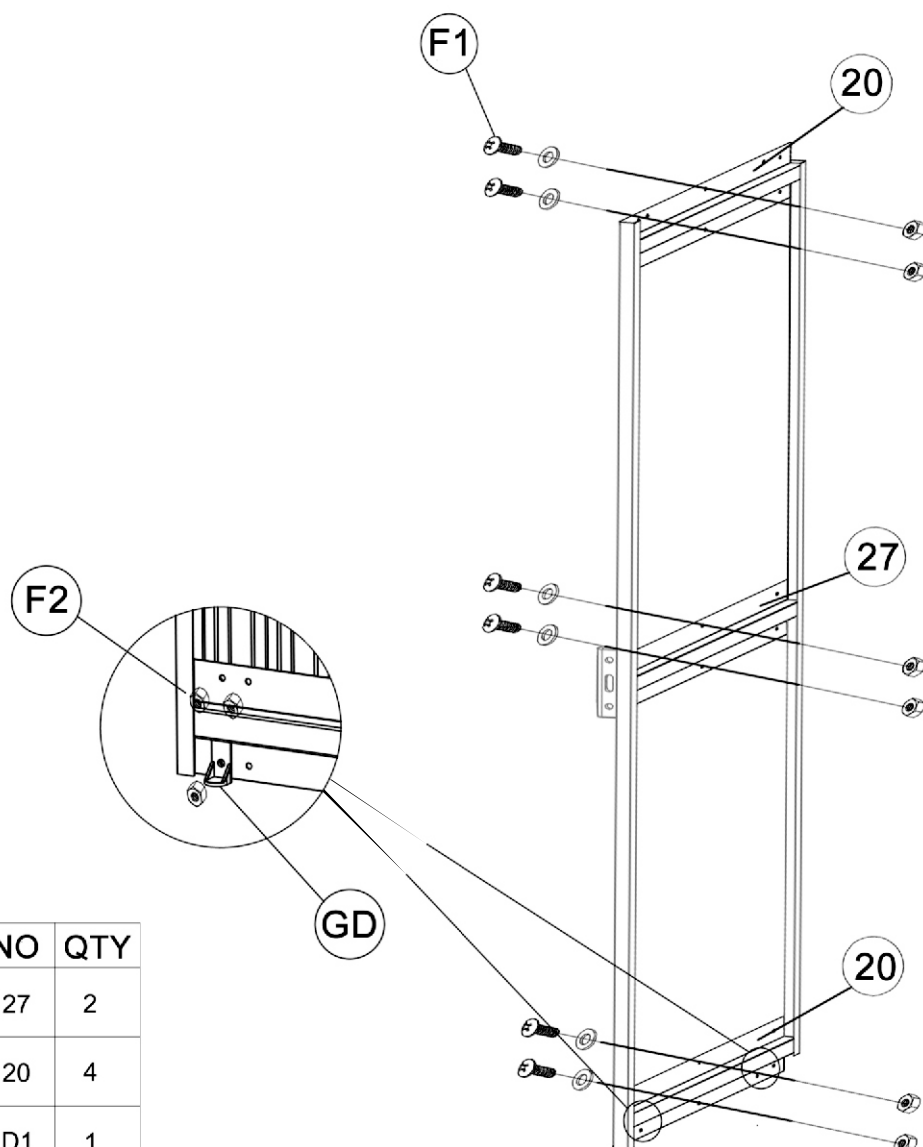

PART	NO	QTY
	15	2
	17	4
	GC	4
	F1S2	16

# 9


Attach the door bars (20 and 27) to the door panels (D1 and D2) with nuts, bolts and washers F2. The attach bottom slider (GD) to the bottom door bar as shown.



PART	NO	QTY
	27	2
	20	4
	D1	1
	D2	1
	GD	4
	F1S2	44

# 10

Attach two door handles (GB) to the door panel (D2) and secure with nuts, bolts and washers F2 from the inside.

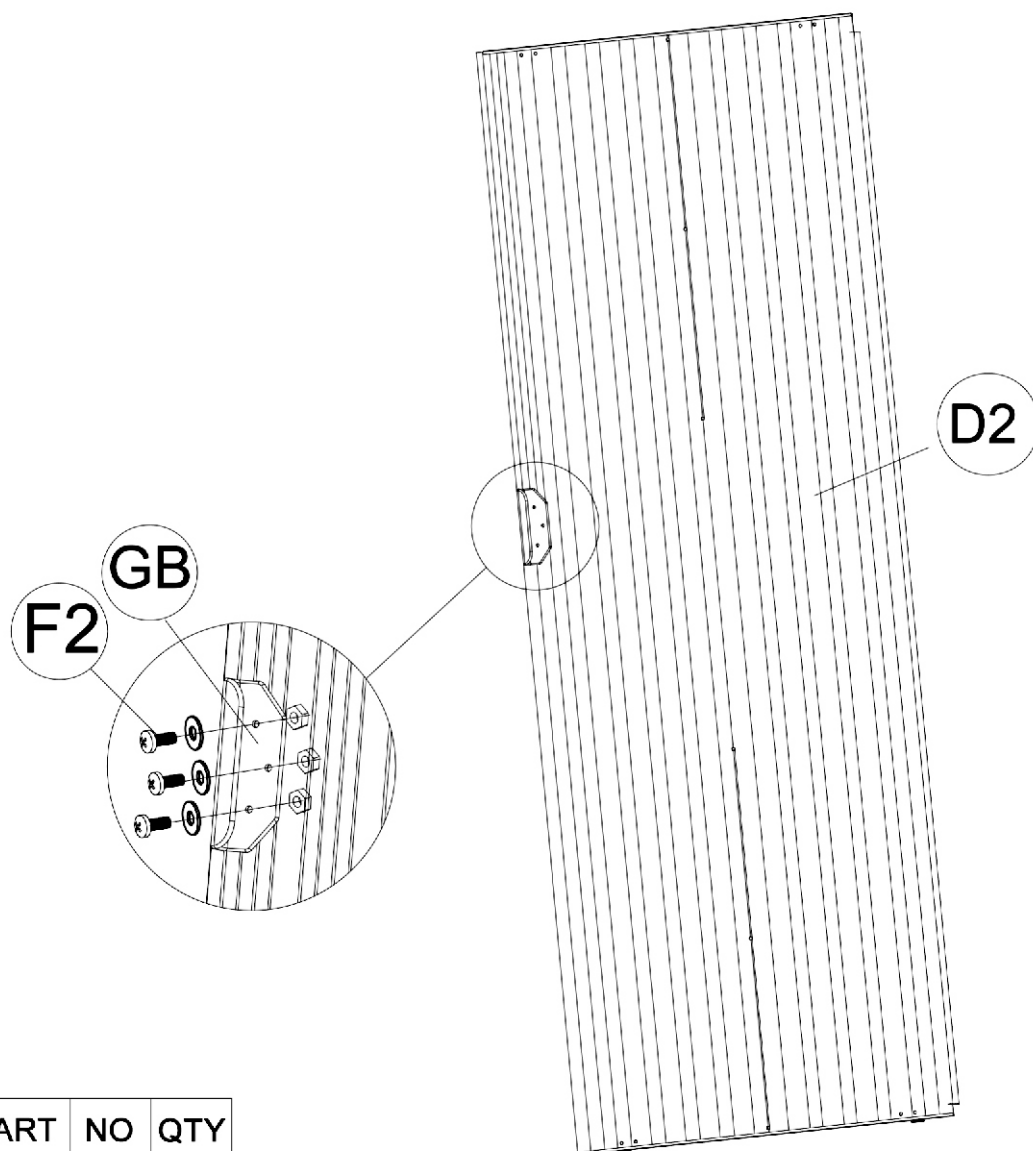


PART	NO	QTY
	GB	2
	F2S2	6

# 11

Slide the door assembly into the base bar (3L). Ensure that the bottom slider (GD) sits inside the base bar. Then attach the top door panel to the top slider (G2) with screws F3 as shown.

NOTE: Make sure that all holes are aligned properly.

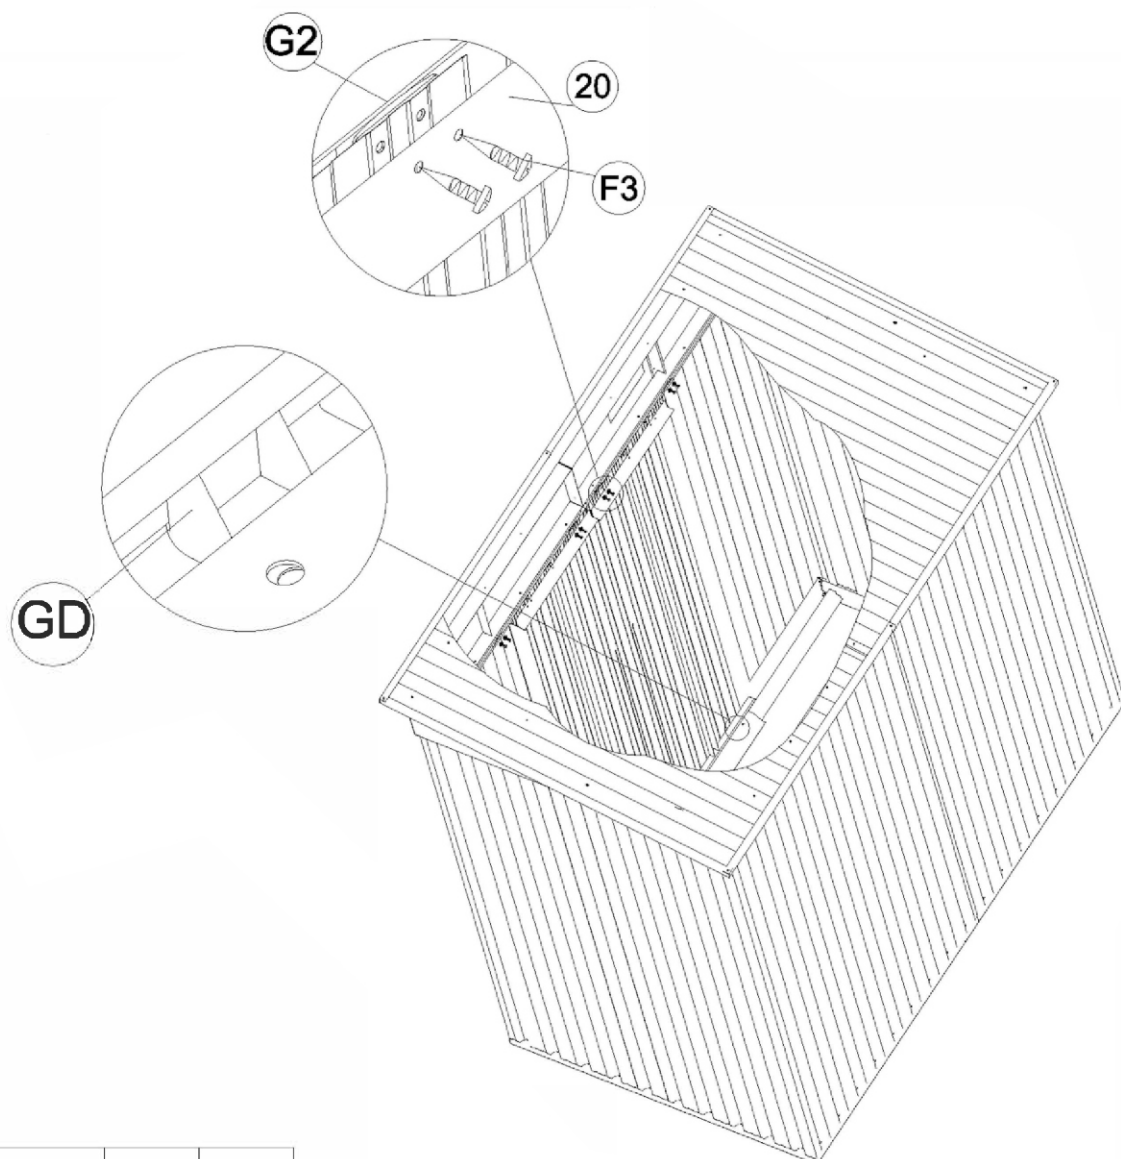

PART	NO	QTY
	F3	8