









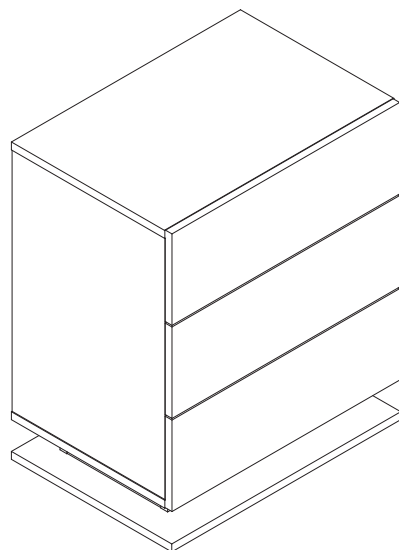


MODEL:BT-B12-LED-3D

VERSION: 1.0




ASSEMBLY INSTRUCTIONS


HARDWARE

A  34pcs	B  34pcs	C  8pcs	D  18pcs	E  32pcs
F  4pcs	G  12pcs	K  8pcs	L  4pcs	M  34pcs
7*50	3*12	8*40	3.5*35	3.5*14

PARTS

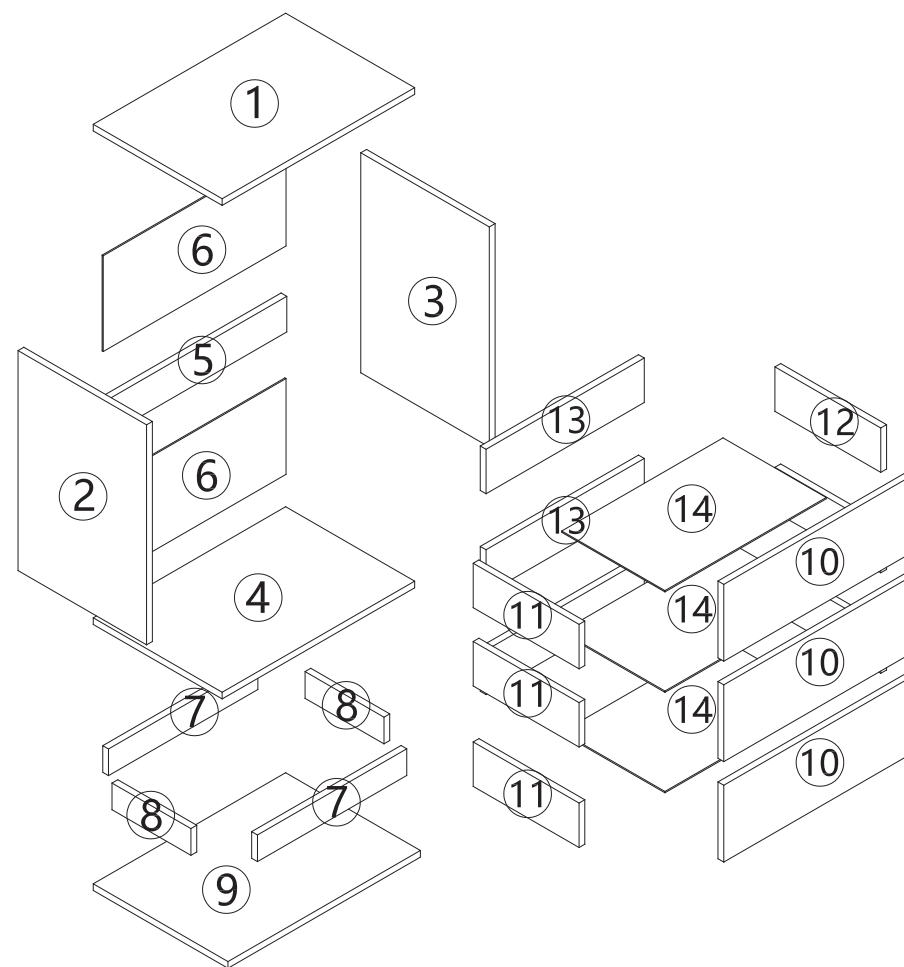

LED COMPONENTS

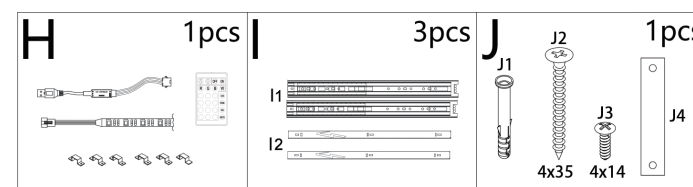

ASSEMBLY CHECKLIST



Read through the instructions carefully before starting assembly.



Make sure that you have the required tools. Do not use power tools.



Identify and lay out all parts to familiarise yourself with them.




Do not fully tighten all screws until the step or process has been completed.



USEFUL INFORMATION

1. Never use power tools for assembly. They can damage the components or hardware if used incorrectly.
2. The most common mistakes made during assembly are using the wrong hardware or getting components from back to front.
3. Always assemble the product on a soft surface such as a carpet or cardboard to avoid scratching or damaging the surface of the product.


1

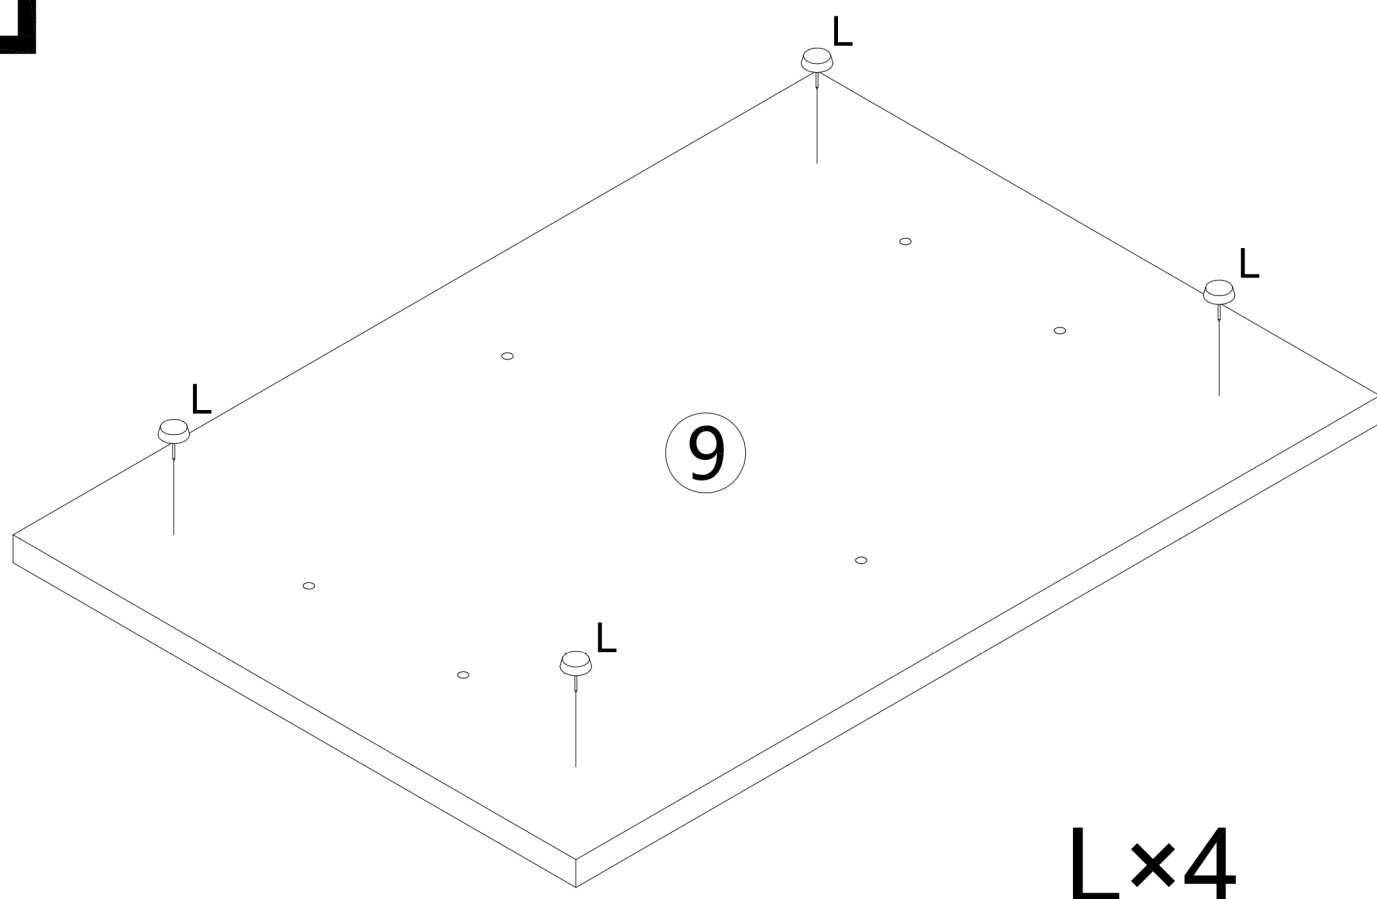

2

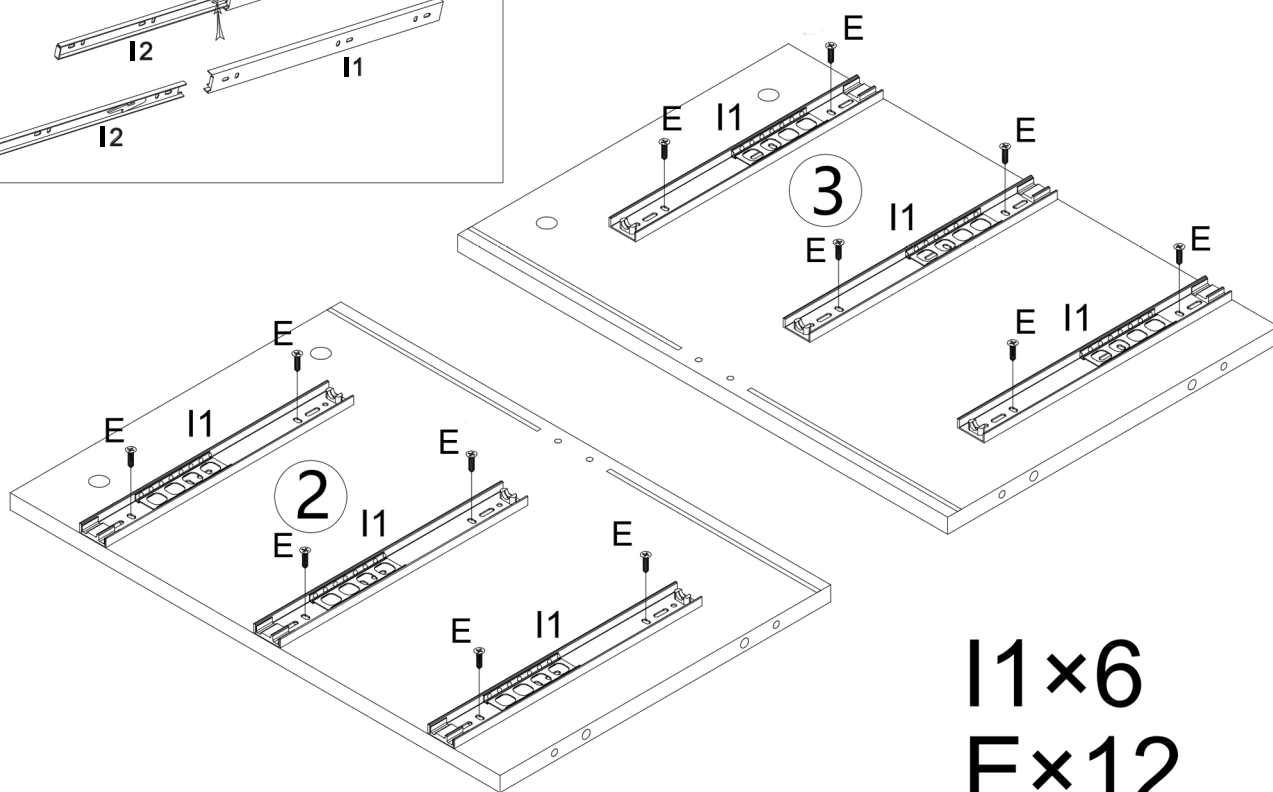
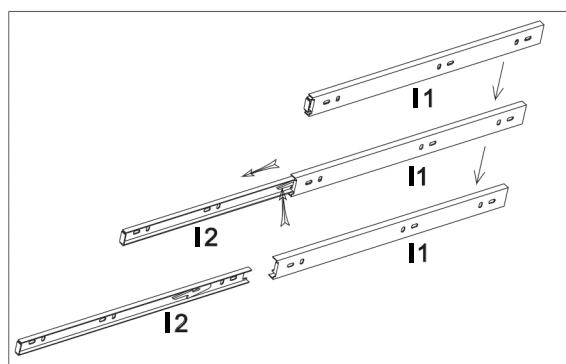


3

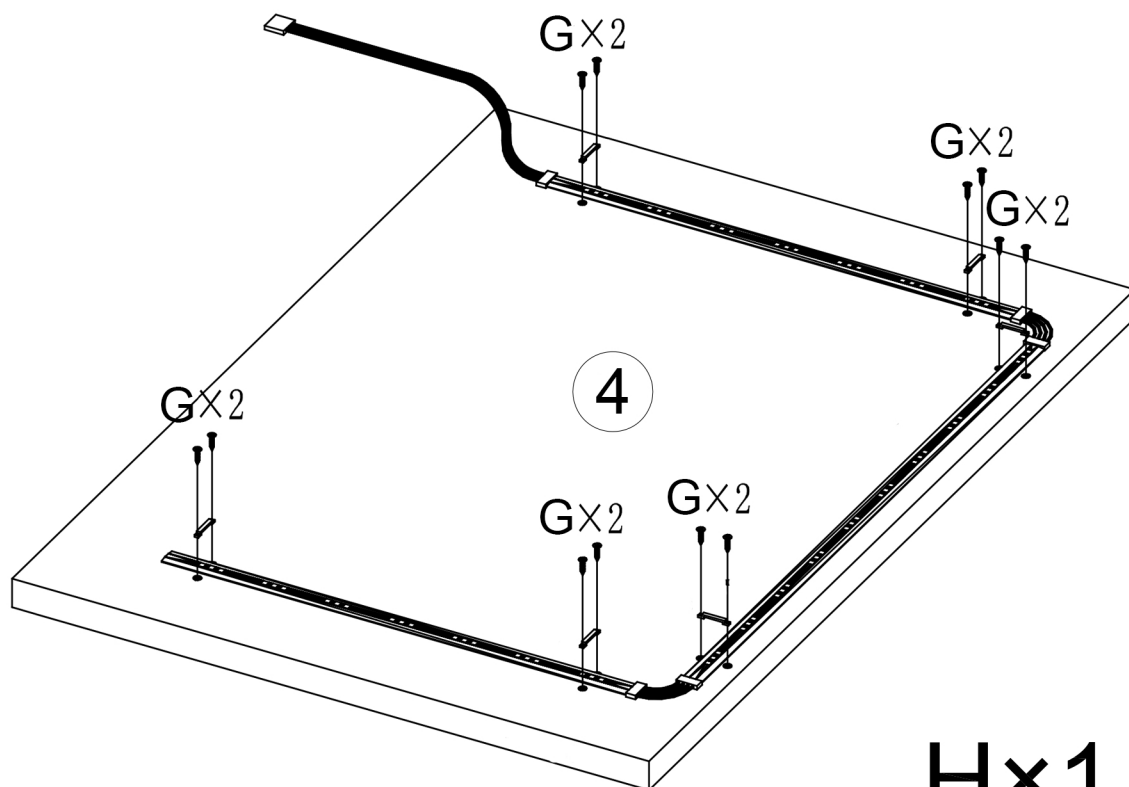


Hx1
Gx12

4

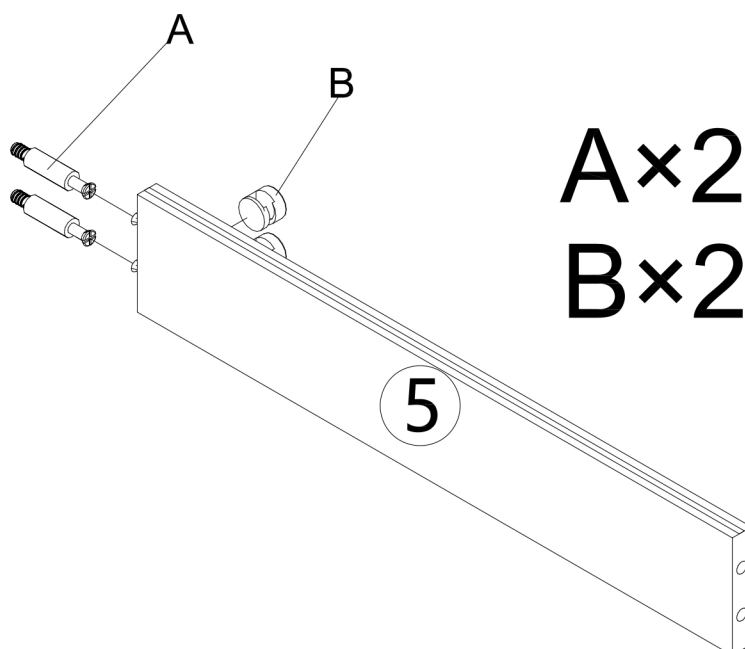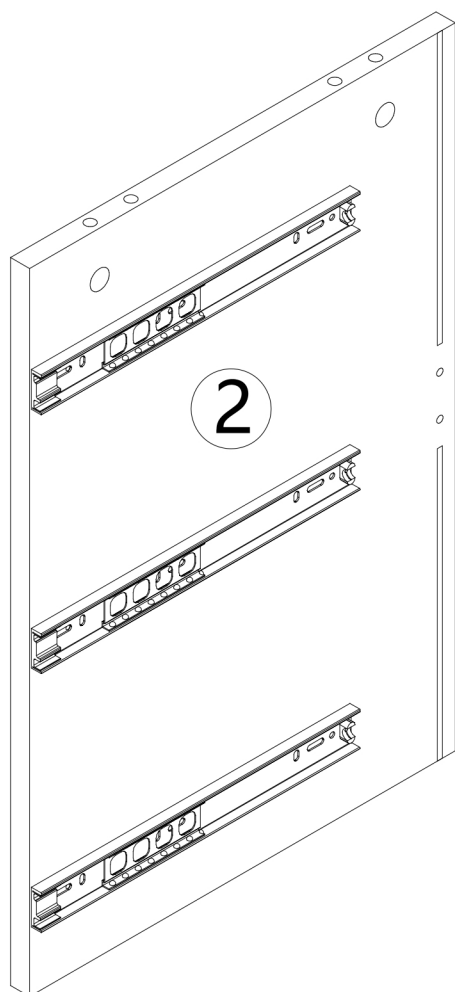


Ax2
Bx2


5

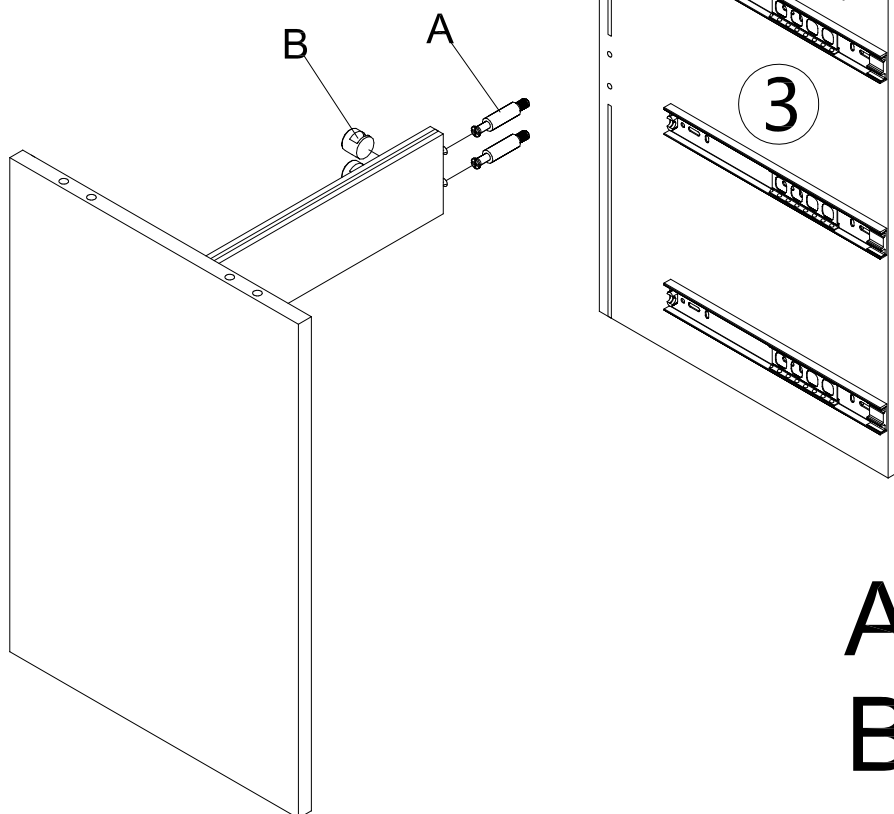

6

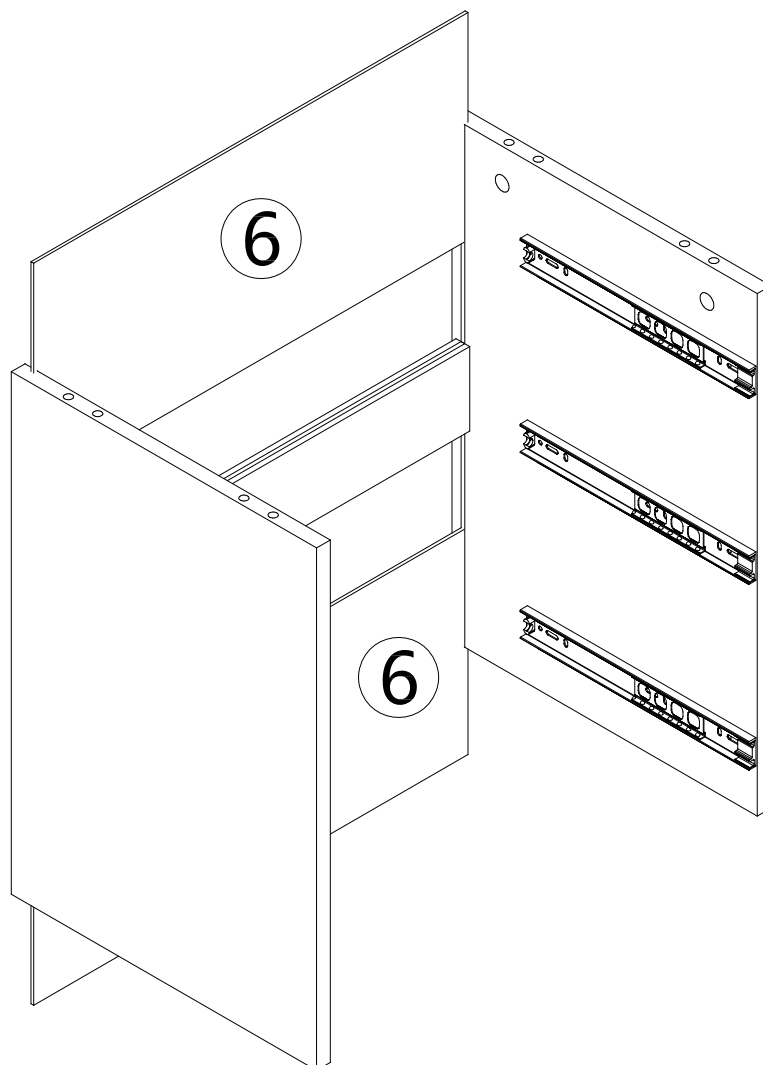


7

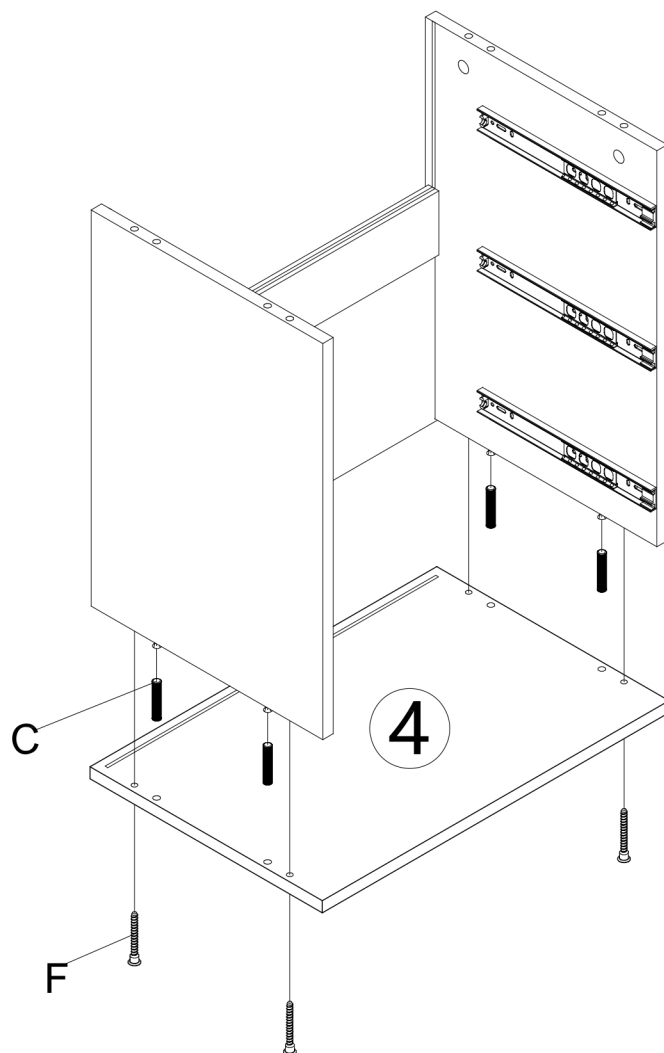


$F \times 4$
 $C \times 4$

8

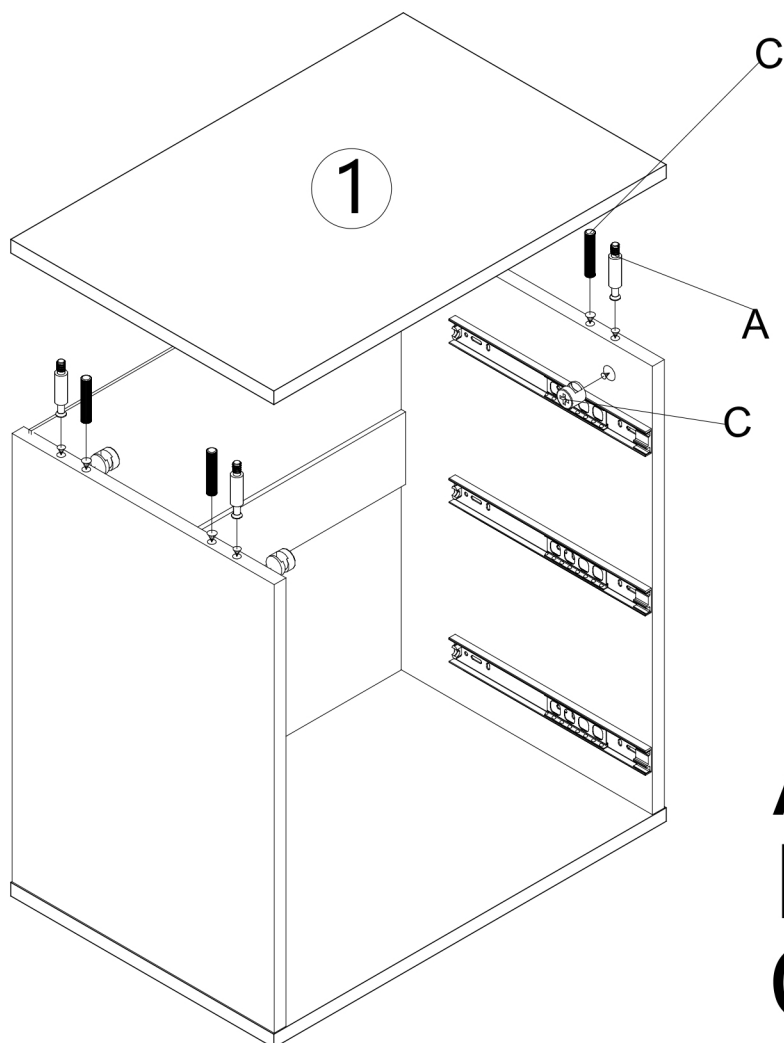


$A \times 4$
 $B \times 4$
 $C \times 4$

9

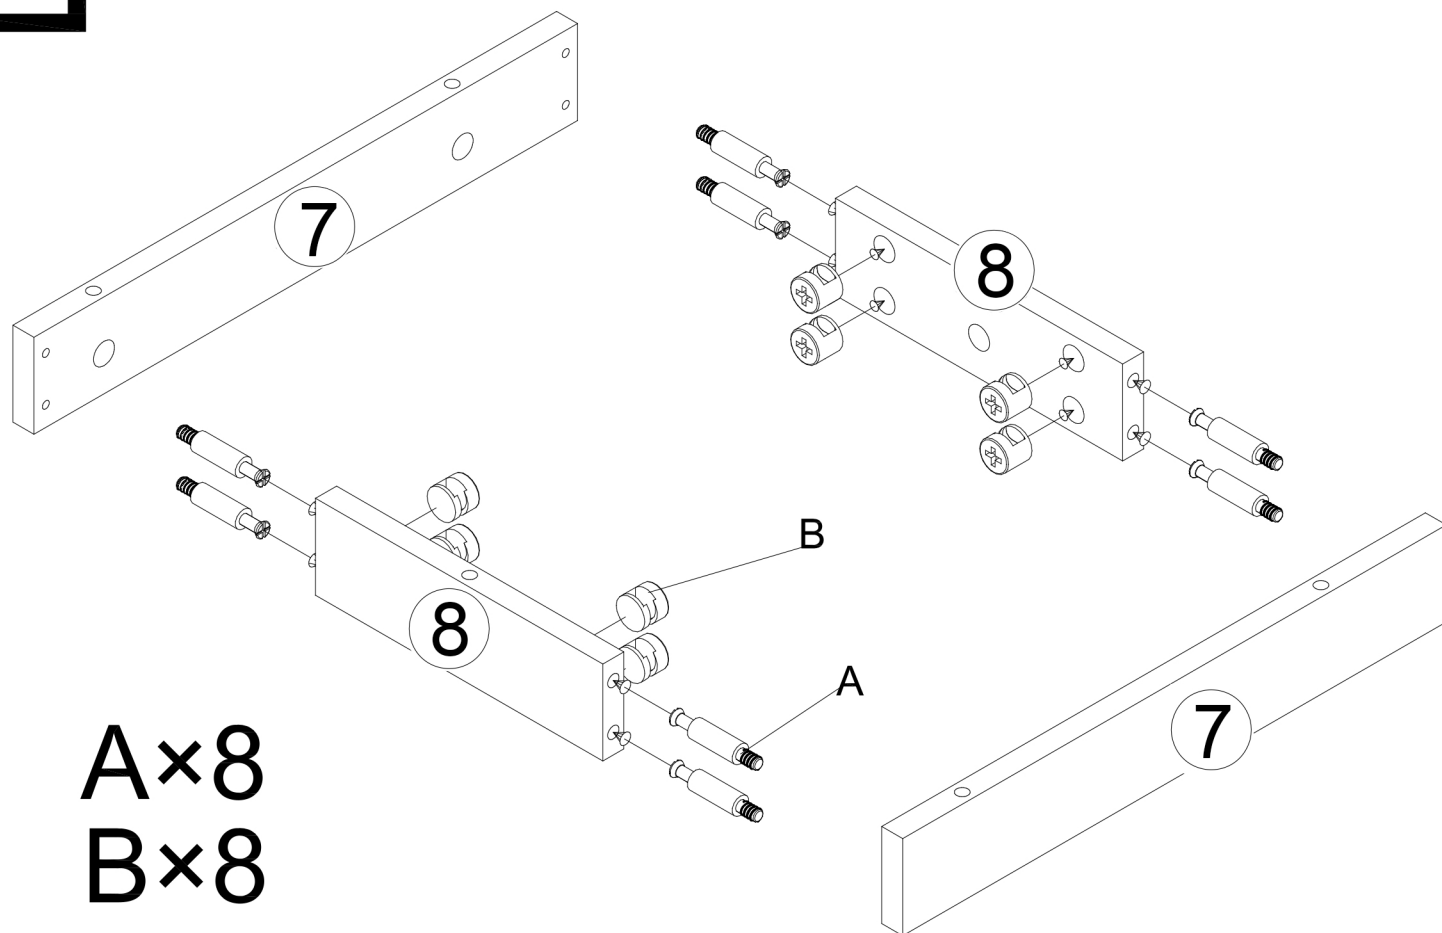


10

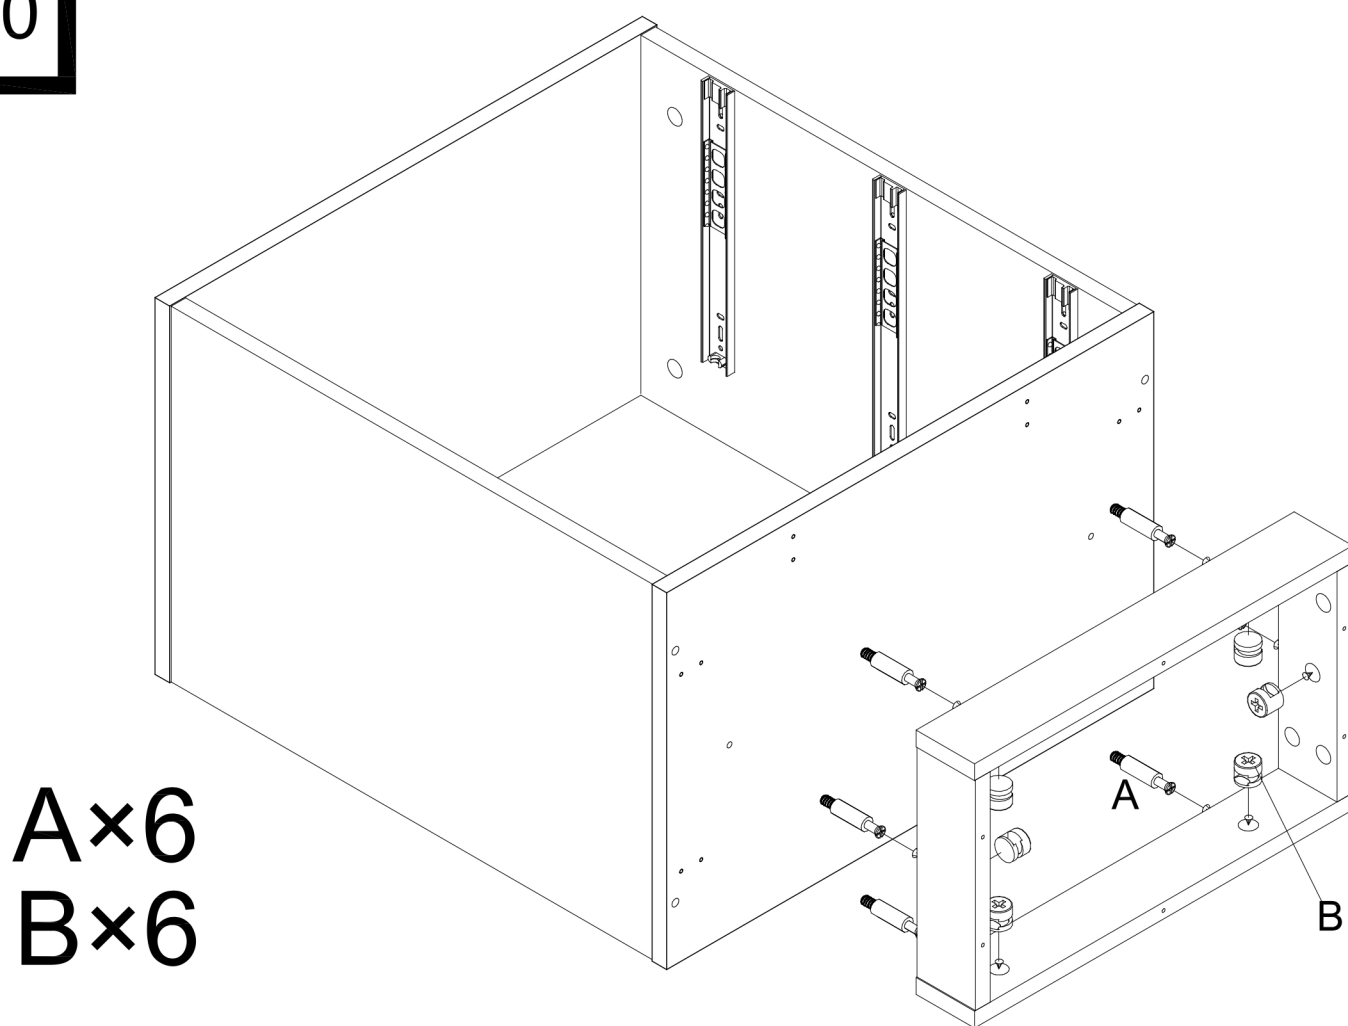


×3

12×6
A×12 D×12
B×12 E×12



13

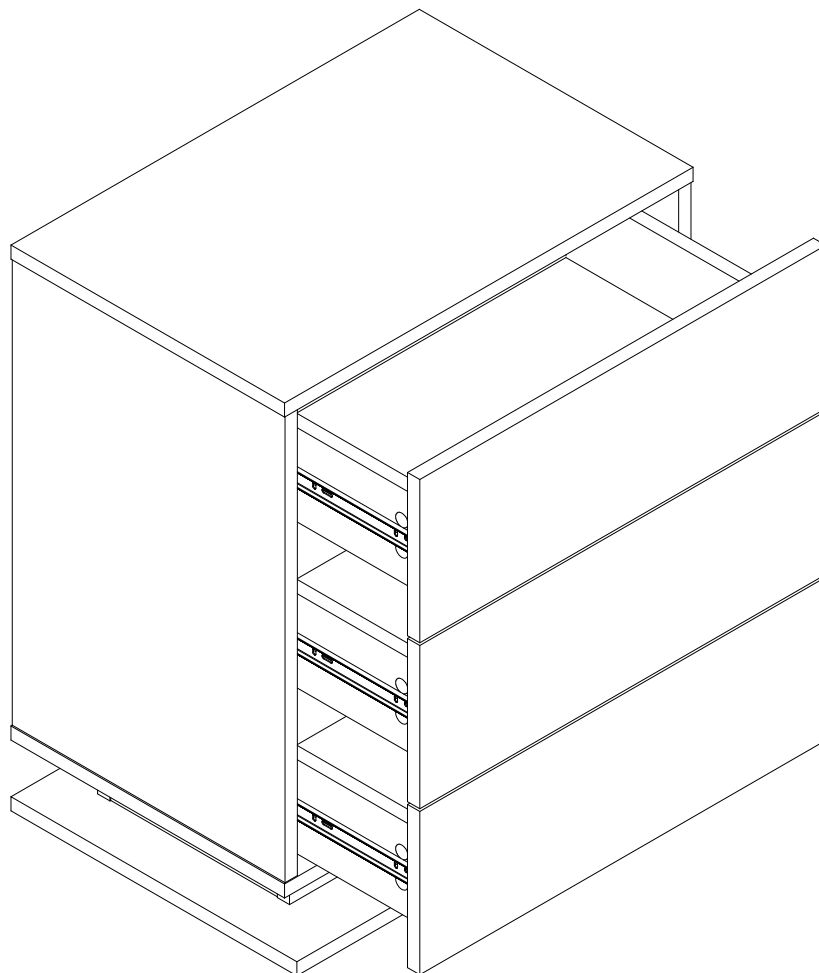


14

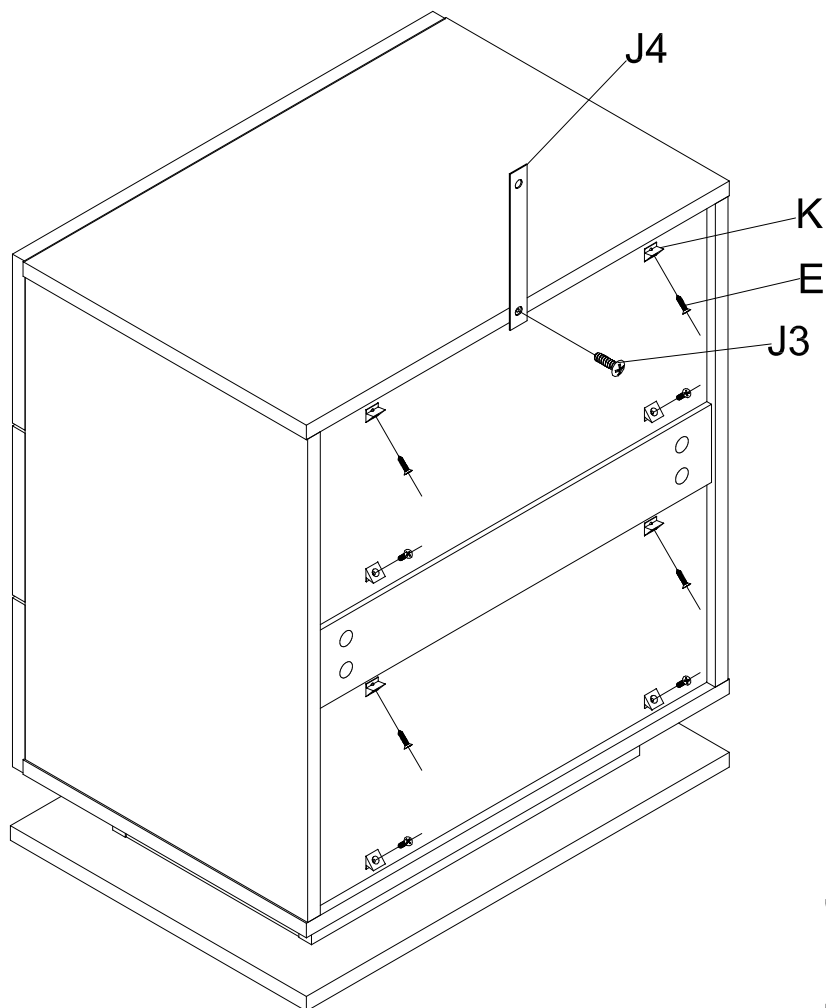


$K \times 8$
 $E \times 8$
 $J3 \times 1$
 $J4 \times 1$




Pre-drilled hole in wall
Lightly tap J1 into hole

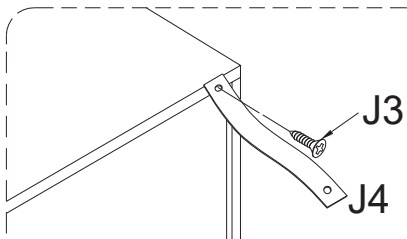


Attach J4 to back of bedside
table with J3



Secure J4 to wall
with J2

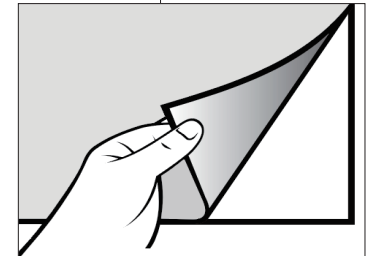

Remove the protective film
from the high gloss panels .

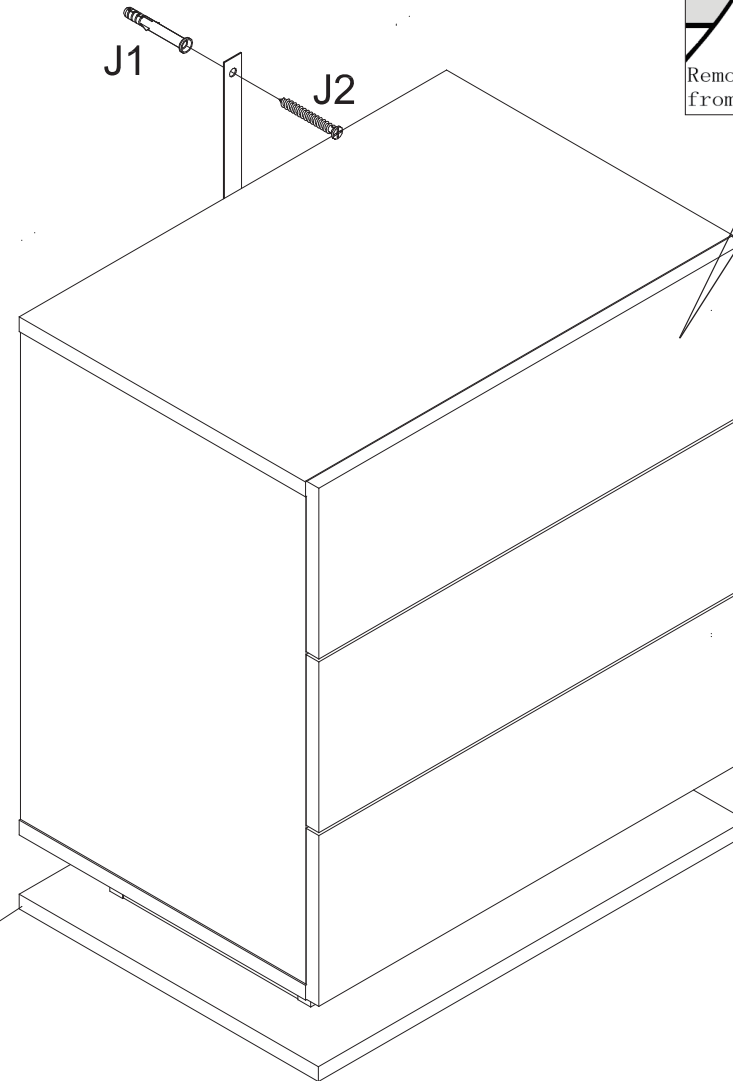


J x1pcs


LED LIGHTS TROUBLESHOOTING

If the LED lights are not working successfully, please check the following:

1. Check the facing of the connectors and ensure that they are as shown in the illustration.
2. Check the remote controller. Remove the plastic film before use.
3. Make sure that the remote controller is within the range of the receiver, and that the transmission signal is not obstructed.

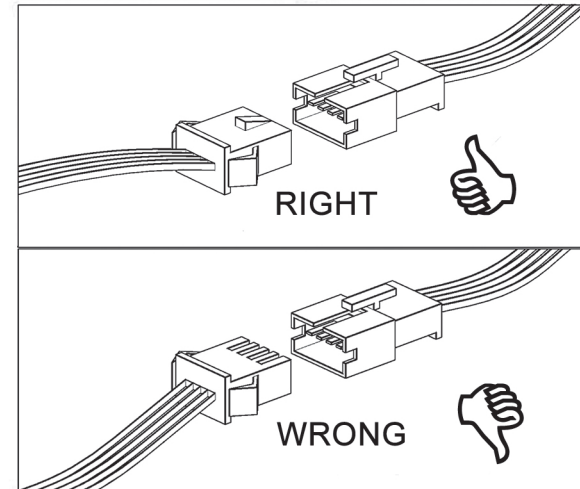

Check the facing of the connectors and ensure that they are aligned correctly.

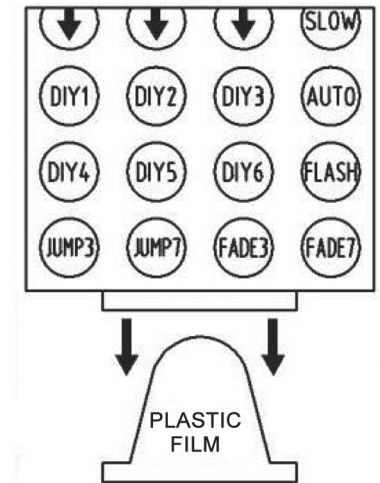

Remove the plastic film from the remote controller.

REMOTE CONTROLLER OPERATING INSTRUCTIONS

SPECIFICATIONS

Working temperature:	-20° to 60°C
Product dimensions:	62mm (L) x 35mm (W) x 23mm (H)
Net weight:	50g
Output:	Three CMOS drain-open output
Maximum load current:	2A per colour
Supply voltage:	DC12V

CONTROL

The function of each button on the remote controller are as shown in the table below:

Brightness + (speed up)	Brightness + (speed down)	Off	On
Static red	Static green	Static blue	Static white
Static orange	Static pea green	Static dark blue	7-colour jump change
Static dark yellow	Static cyan	Static brown	All fade out and fade in
Static yellow	Static light blue	Static pink	7-colour fade change
Static straw yellow	Static sky blue	Static purple	3-base colour jump

CIRCUIT DIAGRAM

