



## EXPLODED VIEW

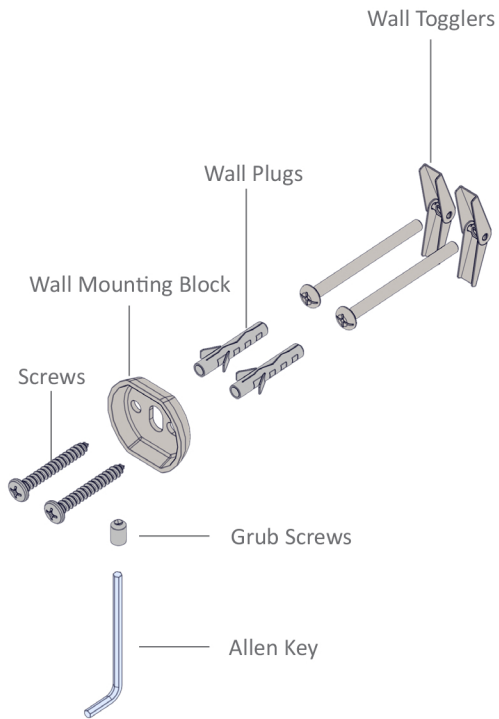


1

### SINGLE FLANGE

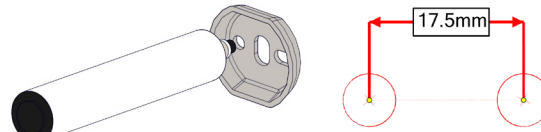

### DOUBLE FLANGE

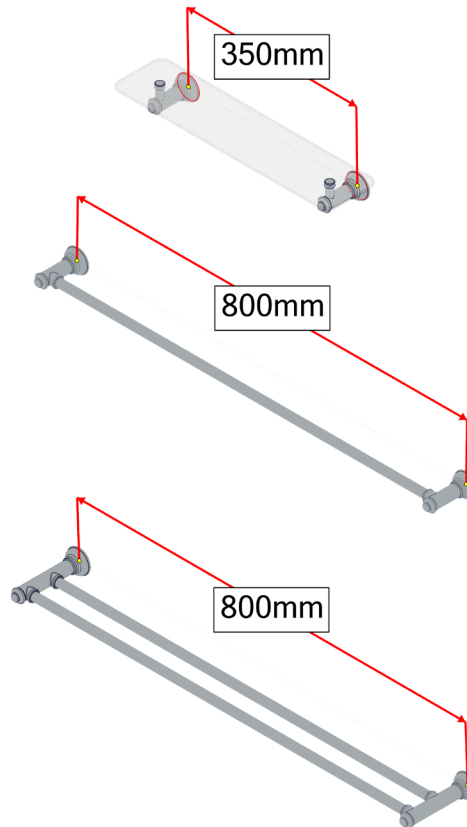


\*ALWAYS USE PHYSICAL PRODUCT TO MEASURE.

2


a

### BRICK

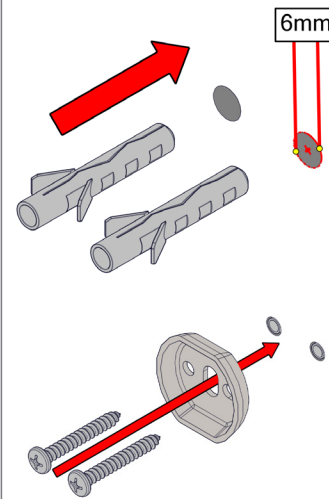


b


### PLASTER

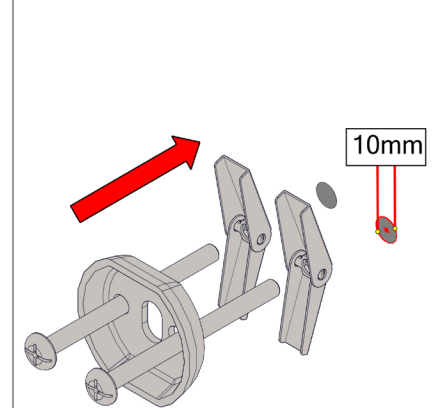

3

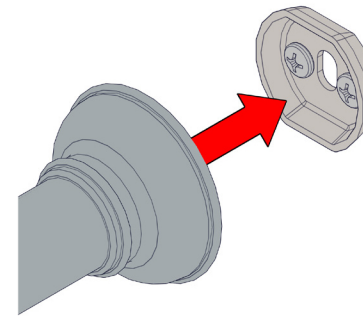

4

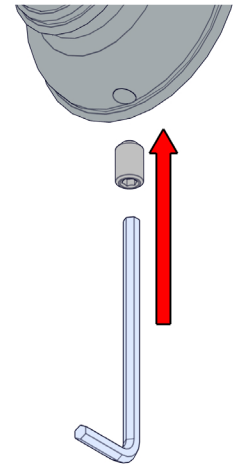

recommended  
working pressure  
**150-  
500KPa**  
maximum hot  
water temperature  
**75  
degrees**