


1

- Apply Teflon Tape to Threaded Elbow.
- Firmly screw the Outlet onto Threaded Elbow.

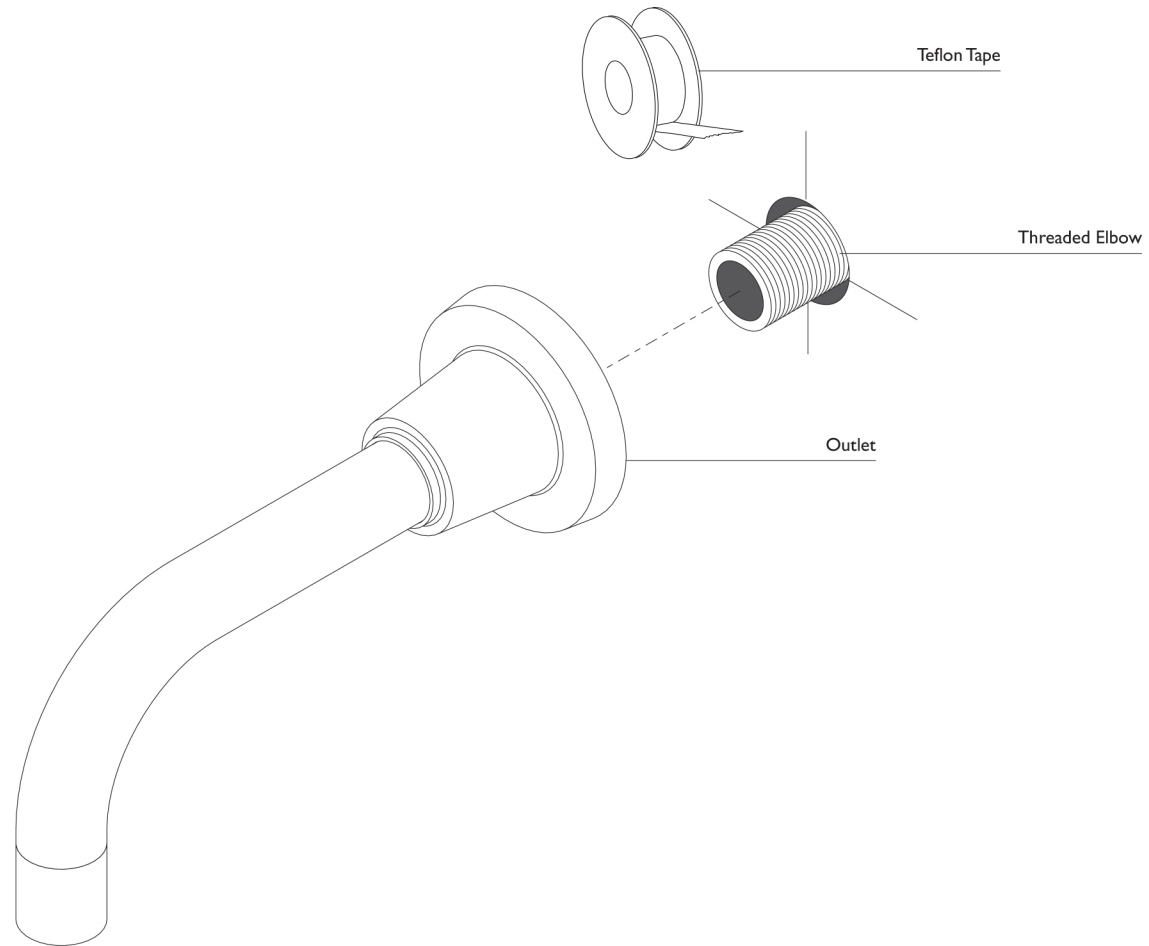

recommended  
working pressure

**150-500  
KPa**



maximum hot  
water temperature

**75  
degrees**