

- 1 Cut a mounting hole 35mm in diameter.
- 2 Fit Rubber Ring into groove on the mixer base.
- 3 Fit hoses through the mounting hole and place the mixer over the mounting hole.


4a SINK MIXER
Fit Plastic Spacer over Threaded Tail (supplied with Sink Mixers). Fit Rubber Gasket over Threaded Tail and Screw on Black Locknut to secure the mixer.

4b BASIN MIXER
Fit Rubber Gasket and Metal Disc over Threaded Tail and Screw on Black Locknut to secure the mixer.


5 Connect Red-Marking hose to hot water supply and Blue-Marking hose to cold water supply.

6 Turn on water supply and check for leaks.

SIDE LEVER MIXER - Single/Twin Handle

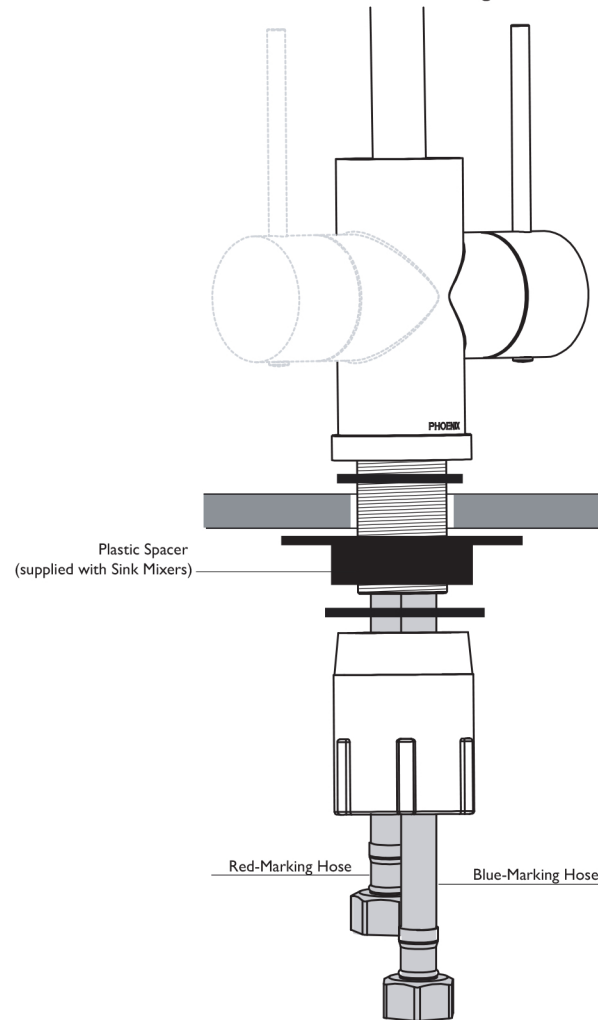

BASIN/SINK MIXER

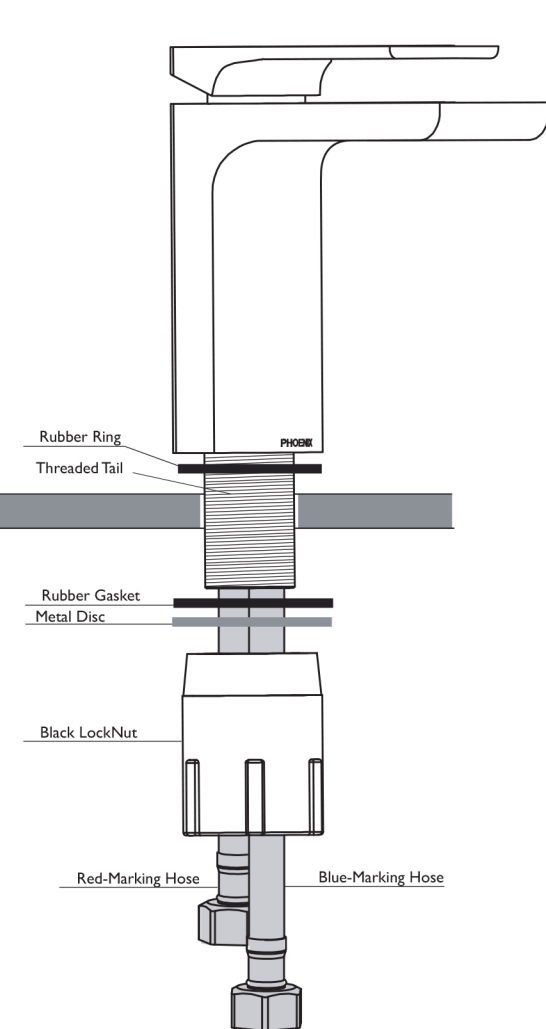

recommended
working pressure
**150-500
KPa**
maximum hot
water temperature
**75
degrees**