



EXPLODED VIEW

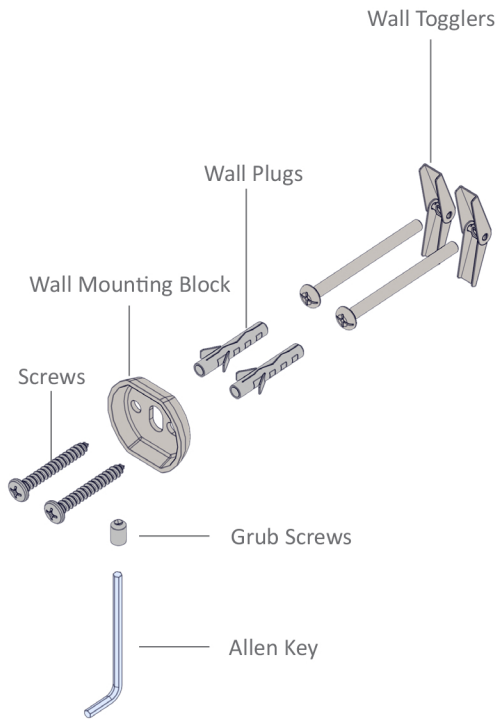


1

SINGLE FLANGE

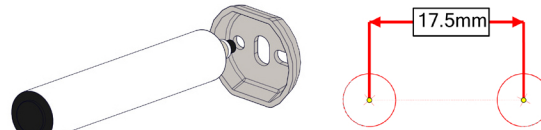

DOUBLE FLANGE

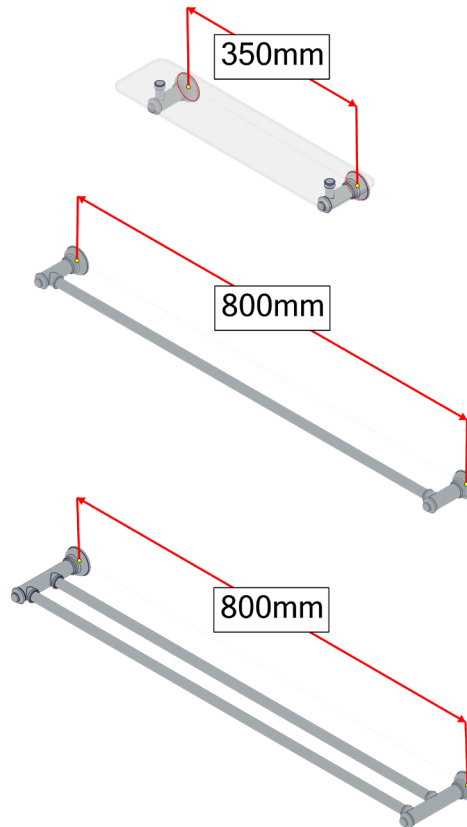


*ALWAYS USE PHYSICAL PRODUCT TO MEASURE.

2


a

BRICK

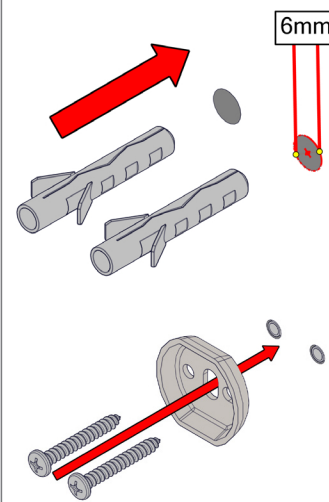


b


PLASTER

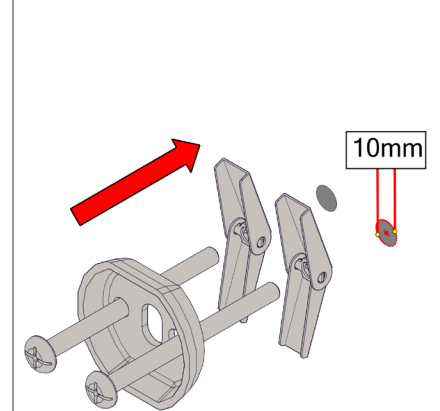

3

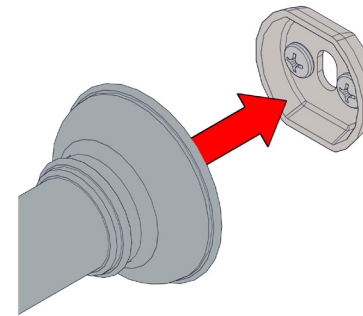

4

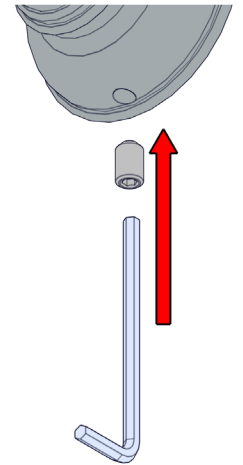

recommended
working pressure
**150-
500KPa**
maximum hot
water temperature
**75
degrees**