PHOENIX™

EXPLODED VIEW

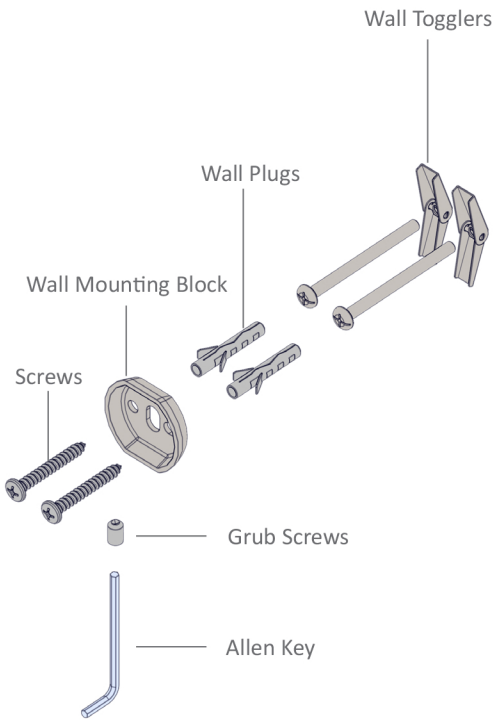

1

SINGLE FLANGE

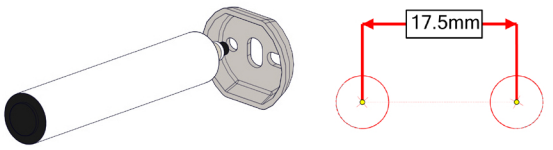

DOUBLE FLANGE

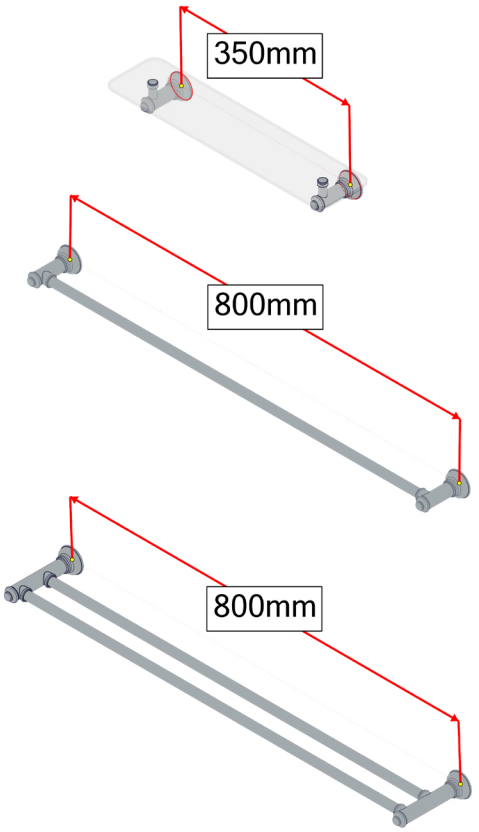

*ALWAYS USE PHYSICAL PRODUCT TO MEASURE.

2

a BRICK

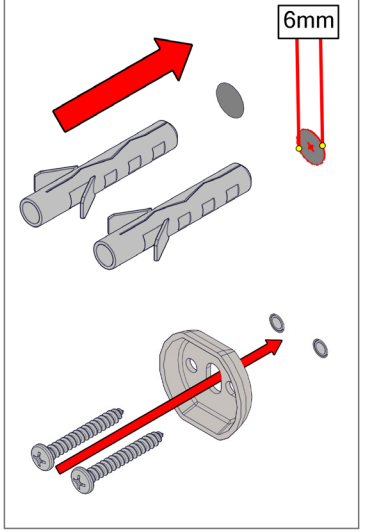

b PLASTER

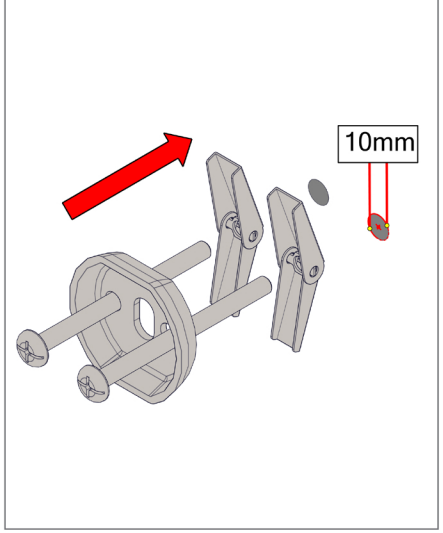

3

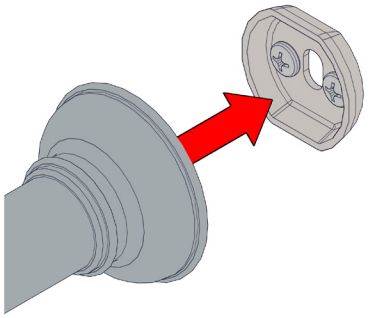

4

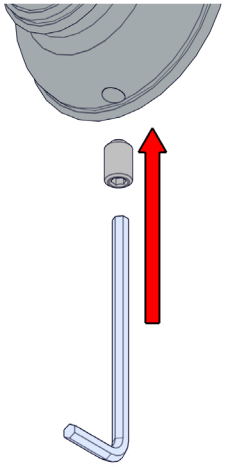

recommended working pressure
150-500KPa

maximum hot water temperature
75 degrees