




1

- Apply Teflon Tape to Threaded Elbow.
- Place the Flow Regulator between the two Rubber Washers, as shown.
- Firmly screw the Shower onto the Threaded Elbow

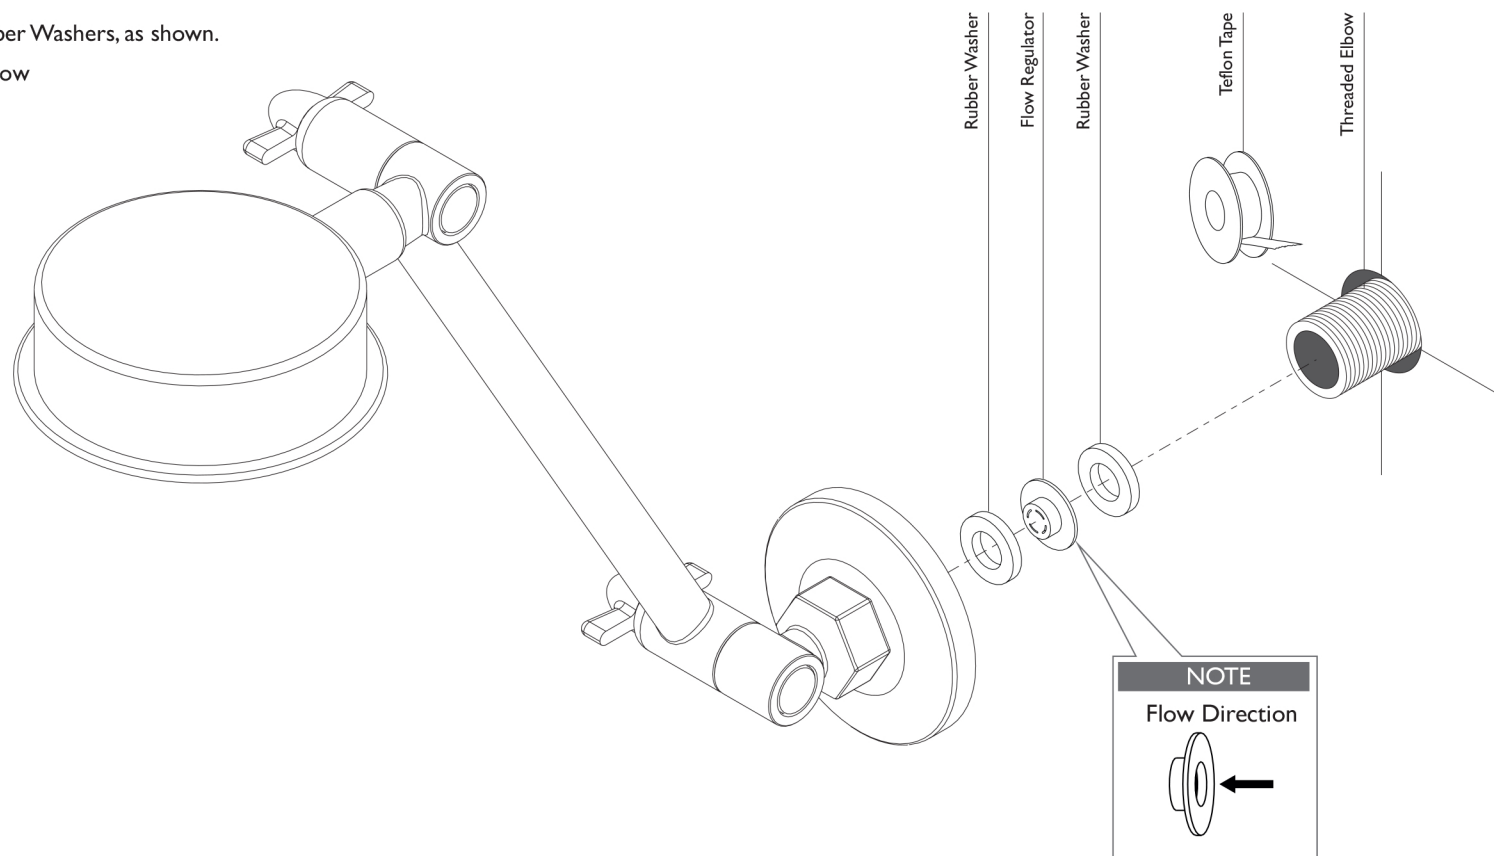

recommended  
working pressure

**150-500  
KPa**



maximum hot  
water temperature

**75  
degrees**