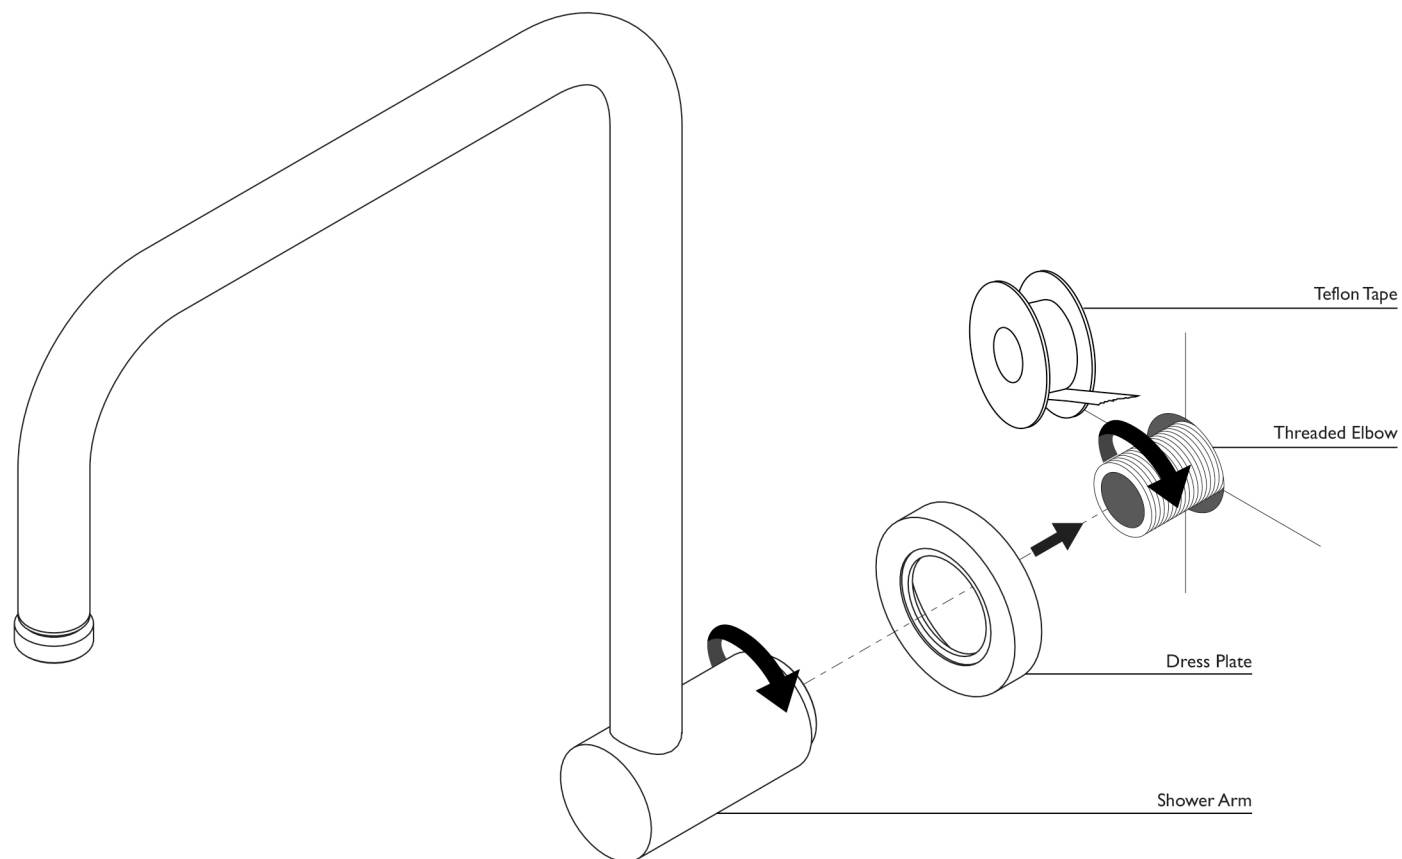




1

- Apply Teflon Tape to Threaded Elbow.
- Fit Dress Plate over the Threaded Elbow.
- Firmly screw on the Shower Arm.



 recommended working pressure  
**150-500 KPa**

 maximum hot water temperature  
**75 degrees**