


**1**


Cut a mounting hole 35mm in diameter. There must be a minimum 12mm width of flat around the hole.

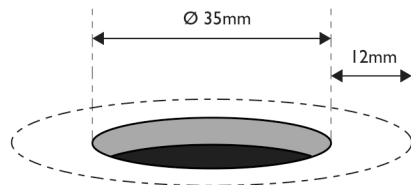

**2**



Fit the Ring Gasket into the groove under the Dress Plate.

Screw the Threaded Rod into the Mixer Body.

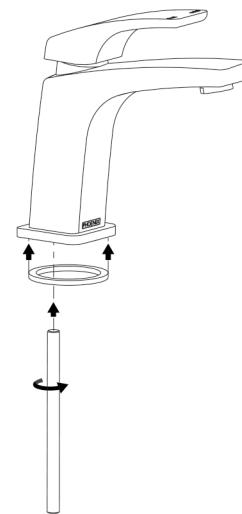


**3**

Screw the Red Marked Hose into the hole marked 'H' and the Blue Marked Hose into the hole marked 'C'.

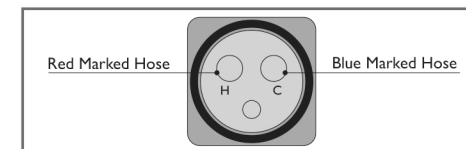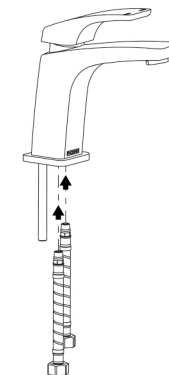

**4**

Feed the Hoses and Rod through the mounting hole and place mixer into position.

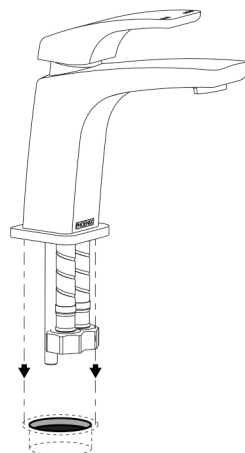

**5**


Underneath the Mounting Hole, feed the Rubber Mounting Gasket then the Mounting Plate onto the Threaded Rod.

Firmly fasten the Lock Nut using the provided Lock Nut Spanner.



**6**

Connect hoses to the water supply.  
Test and check for leaks.

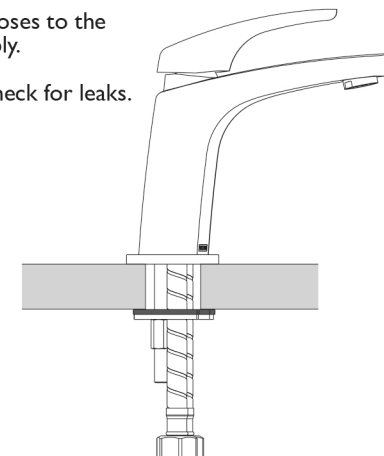

recommended working pressure  
**150-500 KPa**  
maximum hot water temperature  
**75 degrees**

