

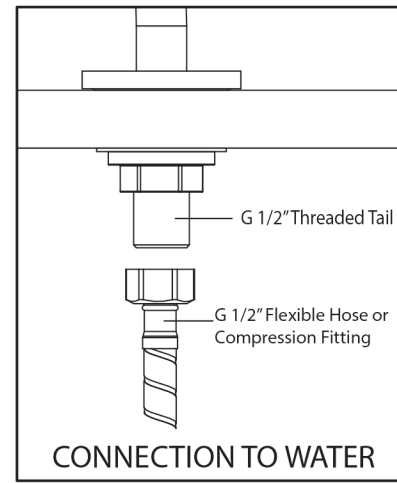
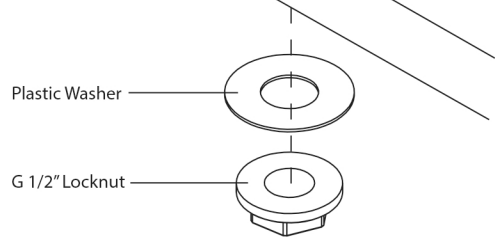
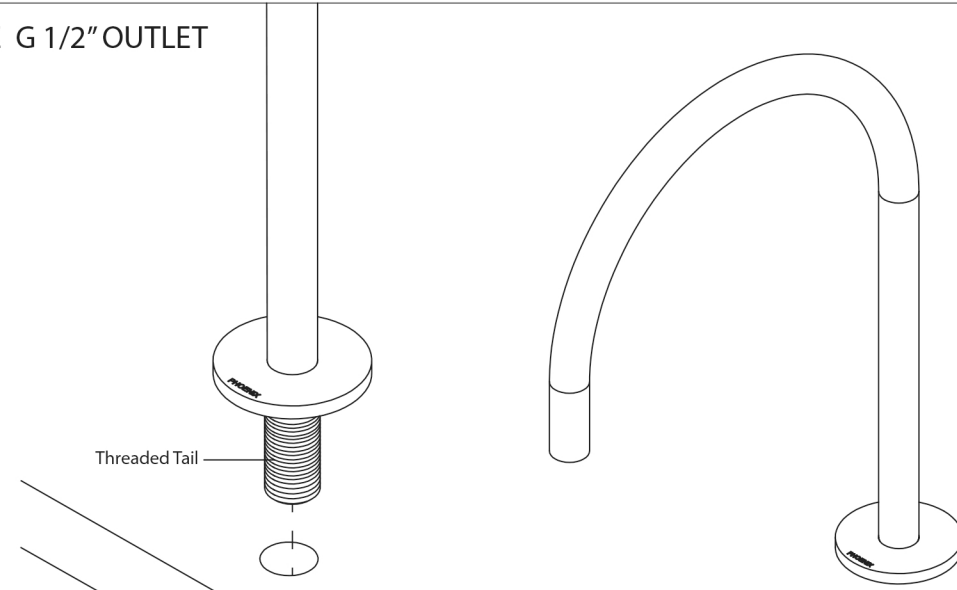


MALE G 1/2" OUTLET

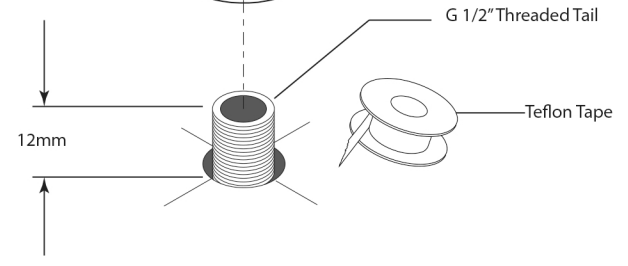


Drill a 22-25mm hole through the bench surface. Insert Outlet as shown. Fit Plastic Washer and G 1/2" Locknut to the threaded tail. Tighten firmly.


FEMALE G 1/2" OUTLET

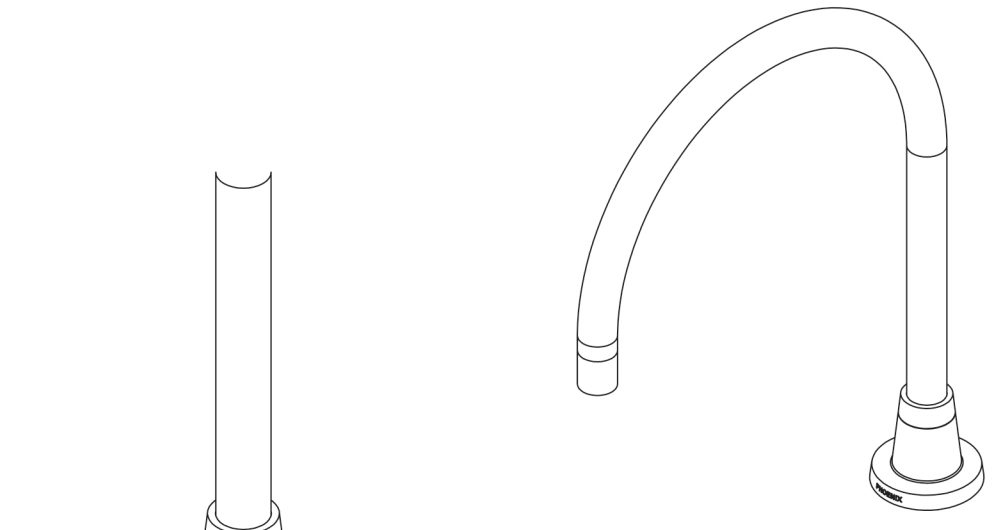

Cut G 1/2" Tail to approximately 12mm from bench surface. Apply Teflon Tape to thread. Screw base of Outlet onto the threaded tail. Tighten firmly.



recommended working pressure
150-500 KPa



maximum hot water temperature
75 degrees