


- Apply Teflon Tape to Threaded Elbow.
- Feed the Wall Outlet through the Dress Plate.
- Screw the Wall Outlet onto the Threaded Elbow until firmly fastened and with the spout pointed downwards.



recommended  
working pressure  
**150-500  
KPa**

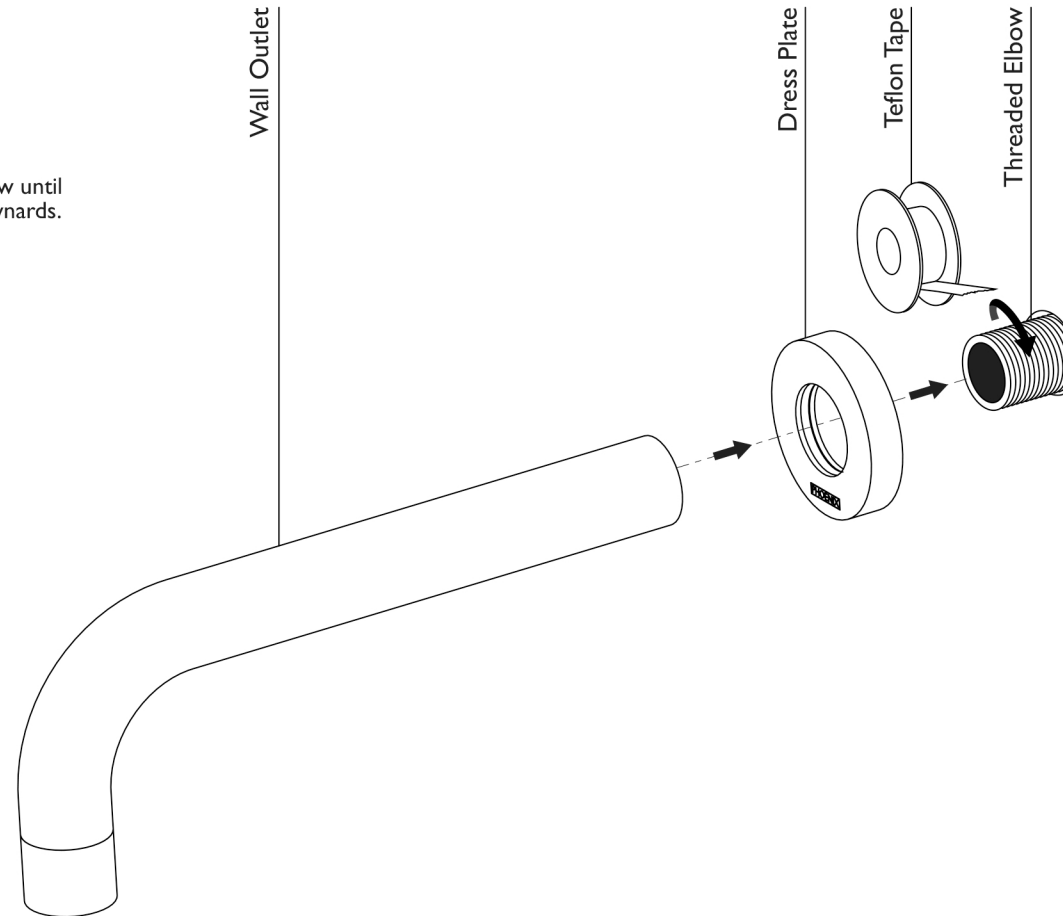

maximum hot  
water temperature  
**75  
degrees**