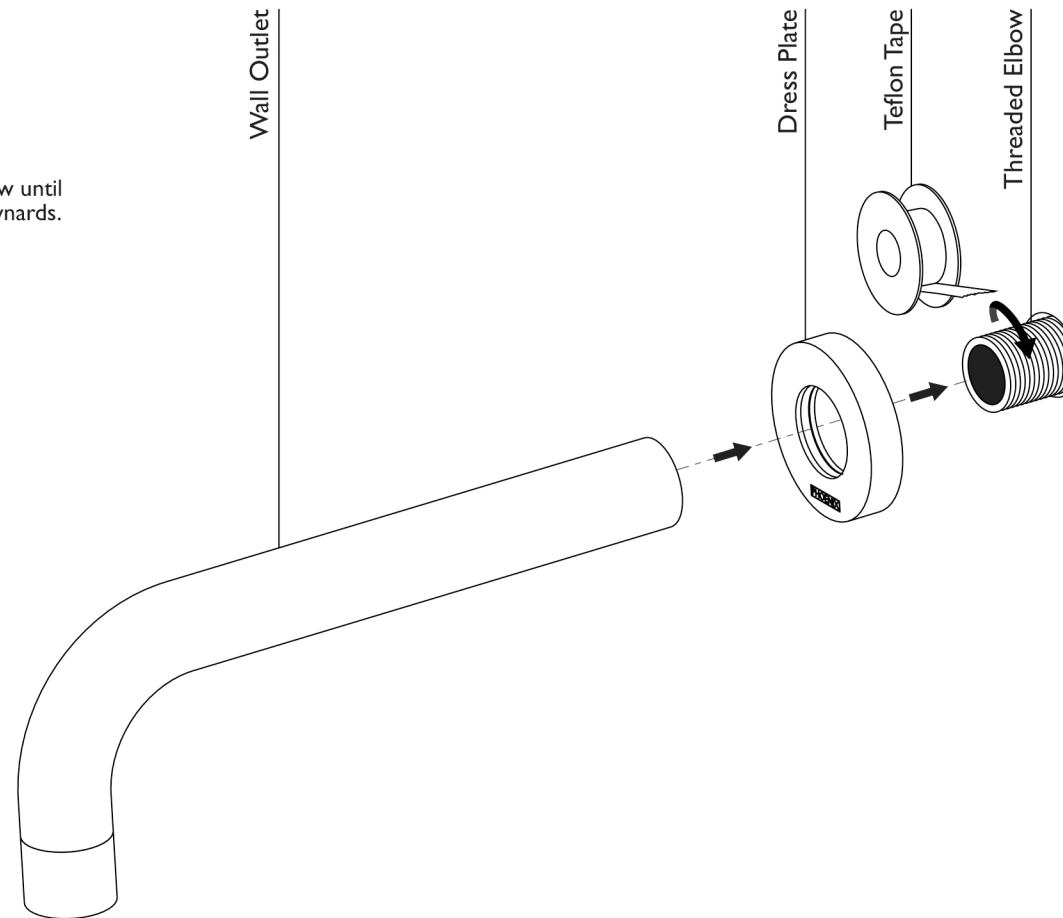




- Apply Teflon Tape to Threaded Elbow.
- Feed the Wall Outlet through the Dress Plate.
- Screw the Wall Outlet onto the Threaded Elbow until firmly fastened and with the spout pointed downwards.



 recommended working pressure  
**150-500 KPa**

 maximum hot water temperature  
**75 degrees**