


- Apply Teflon Tape to Threaded Elbow.
- Feed the Wall Outlet through the Dress Plate.
- Screw the Wall Outlet onto the Threaded Elbow until firmly fastened and with the spout pointed downwards.



recommended
working pressure
**150-500
KPa**

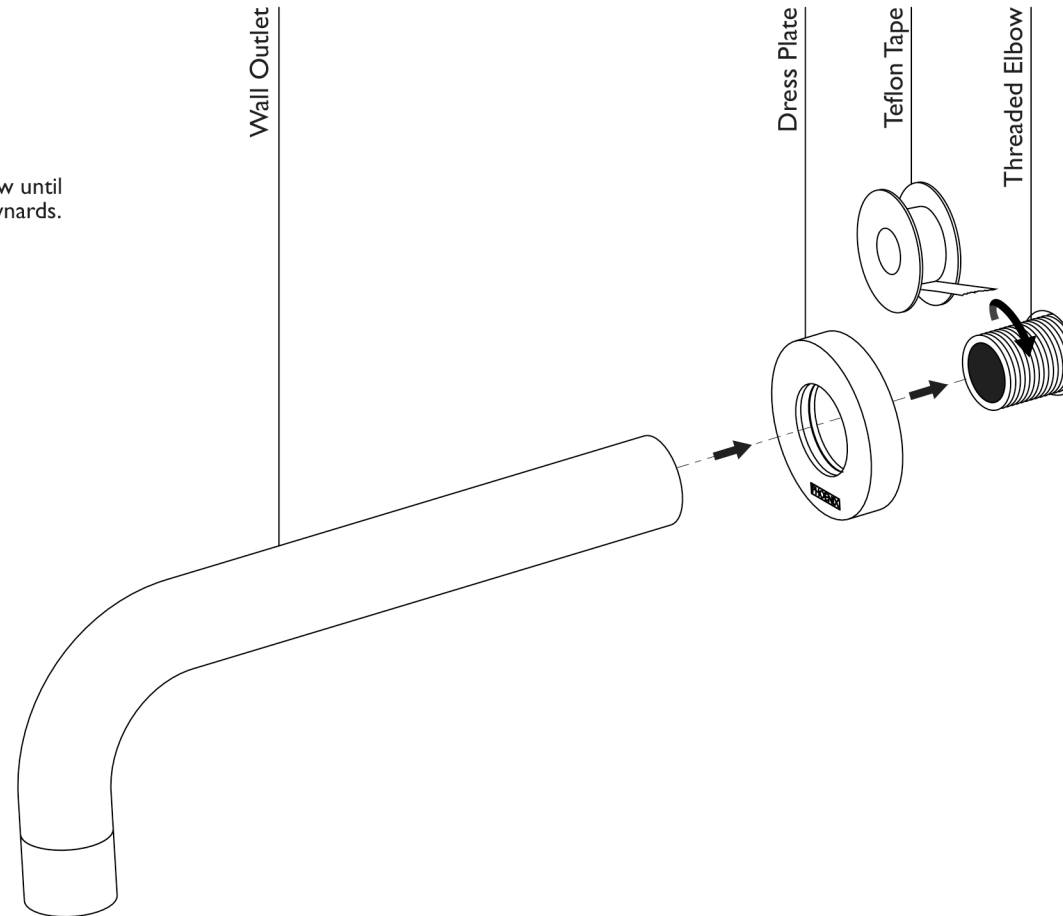

maximum hot
water temperature
**75
degrees**