


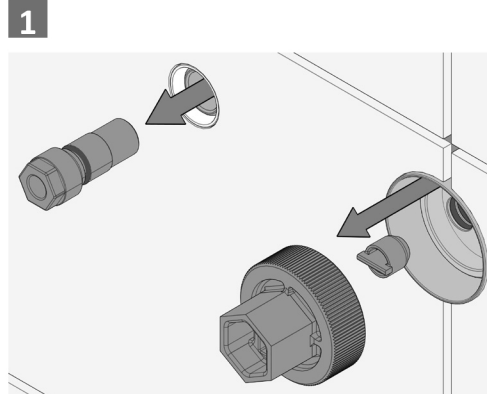
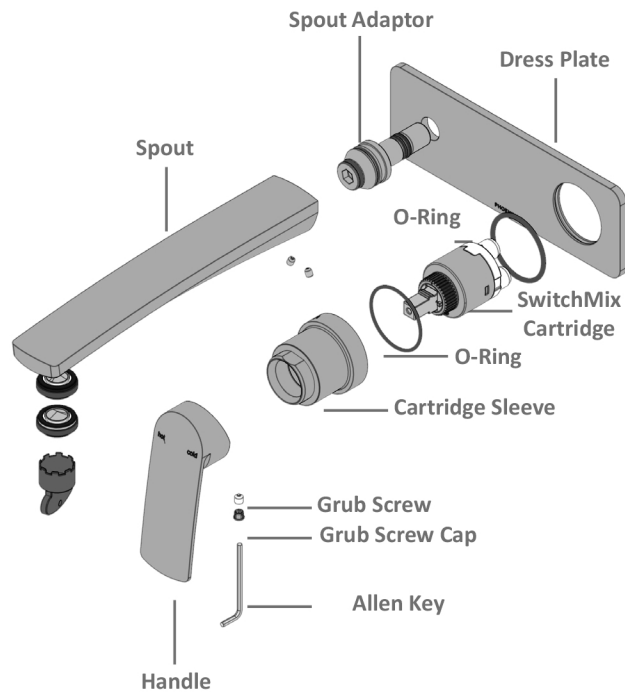
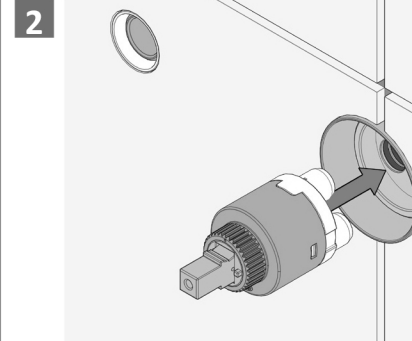






Ensure that no Test Plugs are in Body.

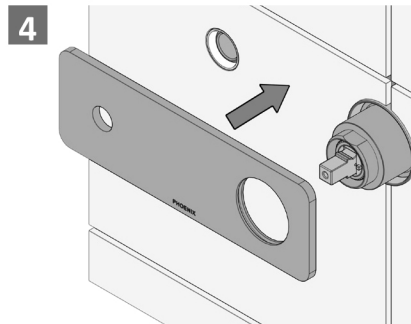

Cartridge only fits in one orientation.

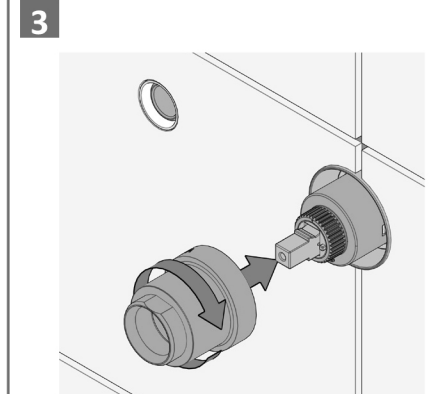

Fasten Spout Adaptor through Dress Plate onto in-wall Mixer Body.

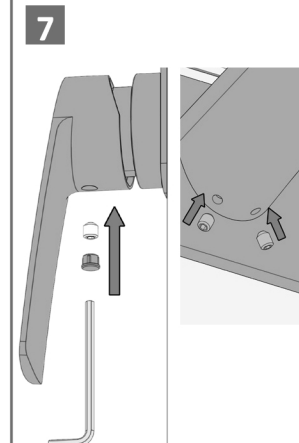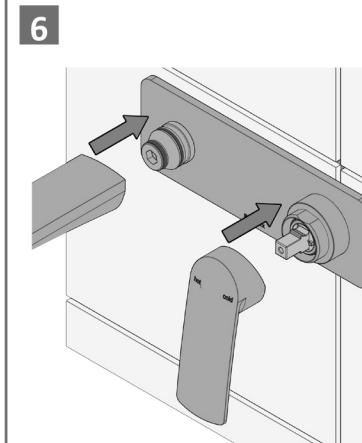

recommended working pressure
150-500KPa
maximum hot water temperature
75 degrees