



Read these instructions and follow steps carefully to ensure you assemble the product correctly and avoid damages. Check that all parts hardware have been provided before assembling the products. Place all contents on a clean, soft-flat surface to avoid scratching the product.



















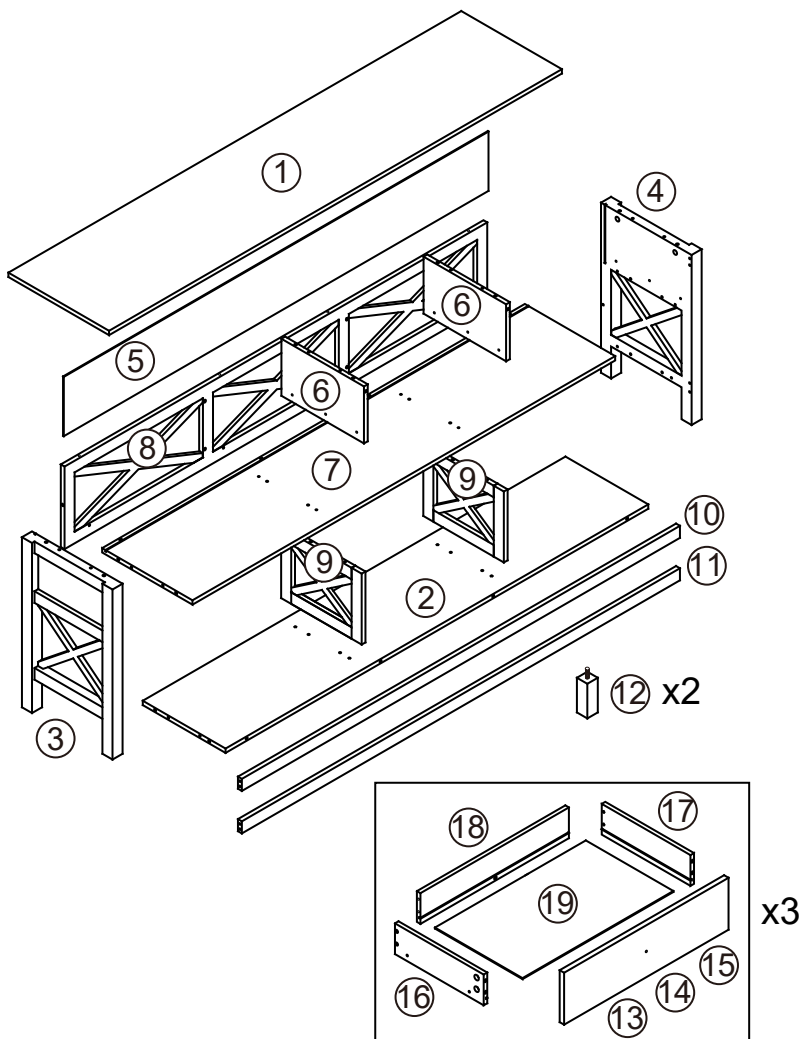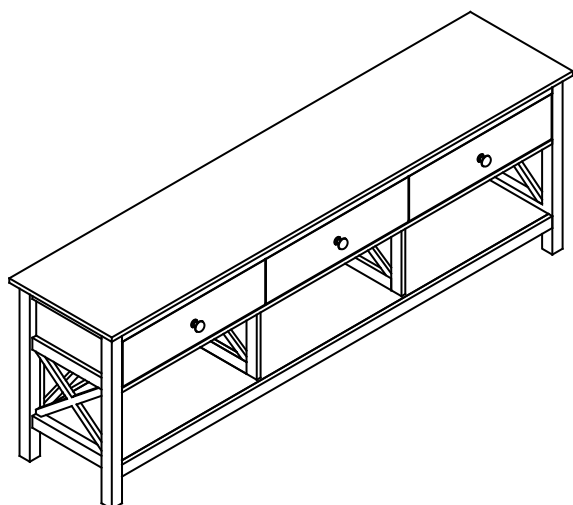




CAUTION:

Only tighten bolts to 80% at first. Once all parts have been assembled, fully tighten all hardware. To prevent damage to threads, do not use a power tool and do not over tighten bolts.


Use two people to lift and turn the product when assembling.

Do not attempt with only one person and do not roll on to legs. Keep all hardware and small parts away from children.




A	B	C	D	E	F	G
						
24 PCS	20 PCS	44 PCS	44 PCS	30 PCS	3 PCS	3 PCS
H	I	J	K	L	M	N
						
3 PCS	3 PCS	3 PCS	3 PCS	4 PCS	2 PCS	4 PCS
O	P	Q	R	S	T	U
						
4 PCS	3 PCS	3 PCS	12 PCS	2 PCS	2 PCS	2 PCS
V	W					
						
4 PCS	2 PCS					

Step 1:

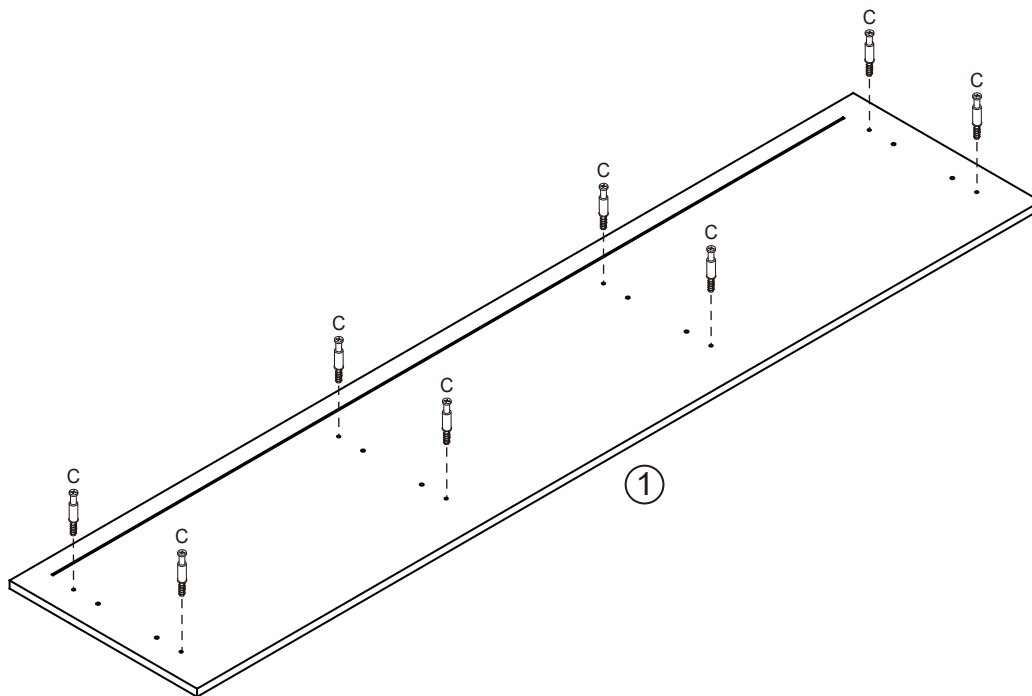


Attach 8 x Cam Bolts (C) to Top Panel (1). Tighten with a Phillips Head Screwdriver.

Step 2:

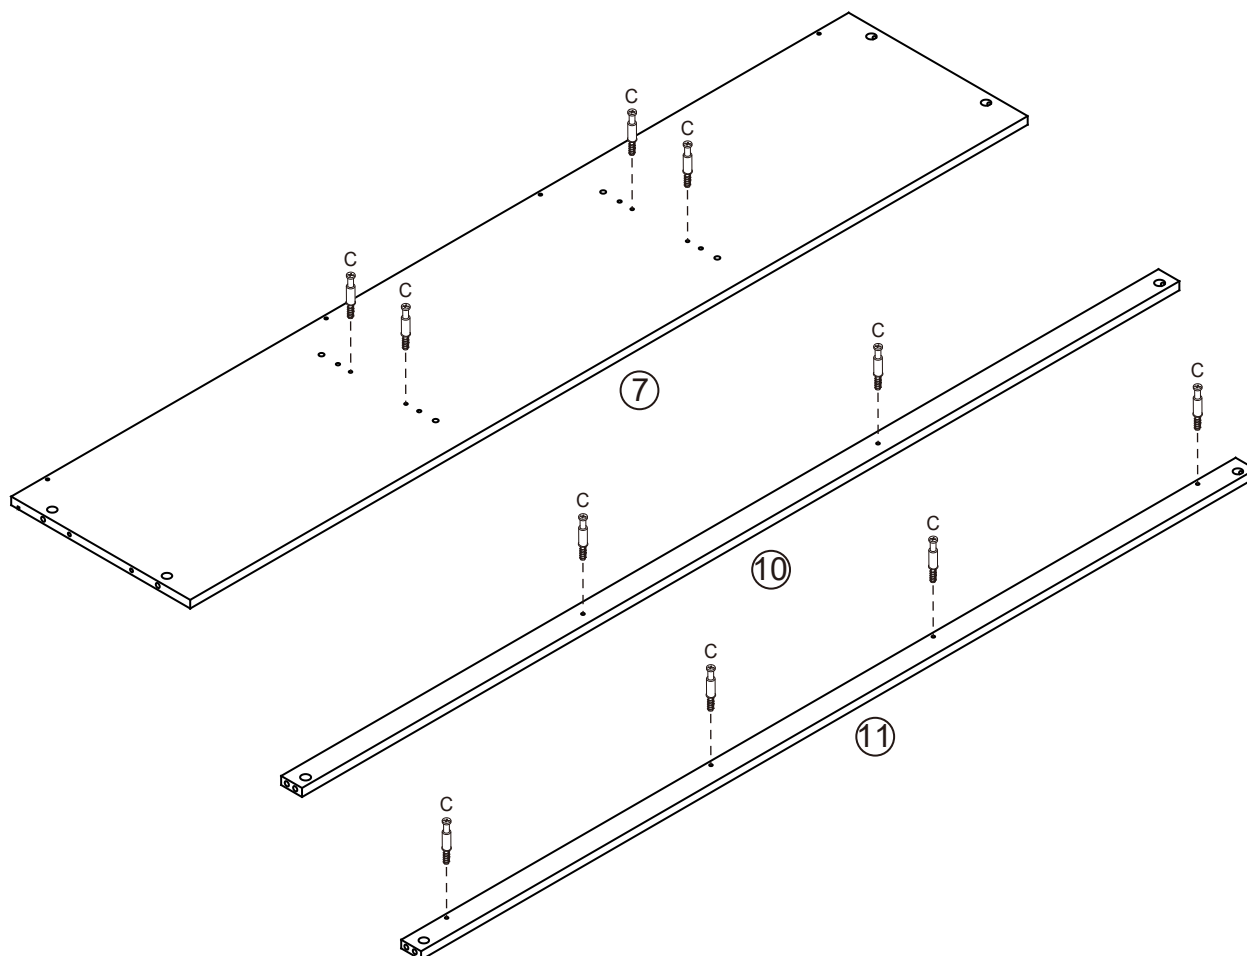


Attach 10 x Cam Bolts (C) to Shelf Panel (7) and Rails (10 & 11). Tighten with a Phillips Head Screwdriver.

Step 3:

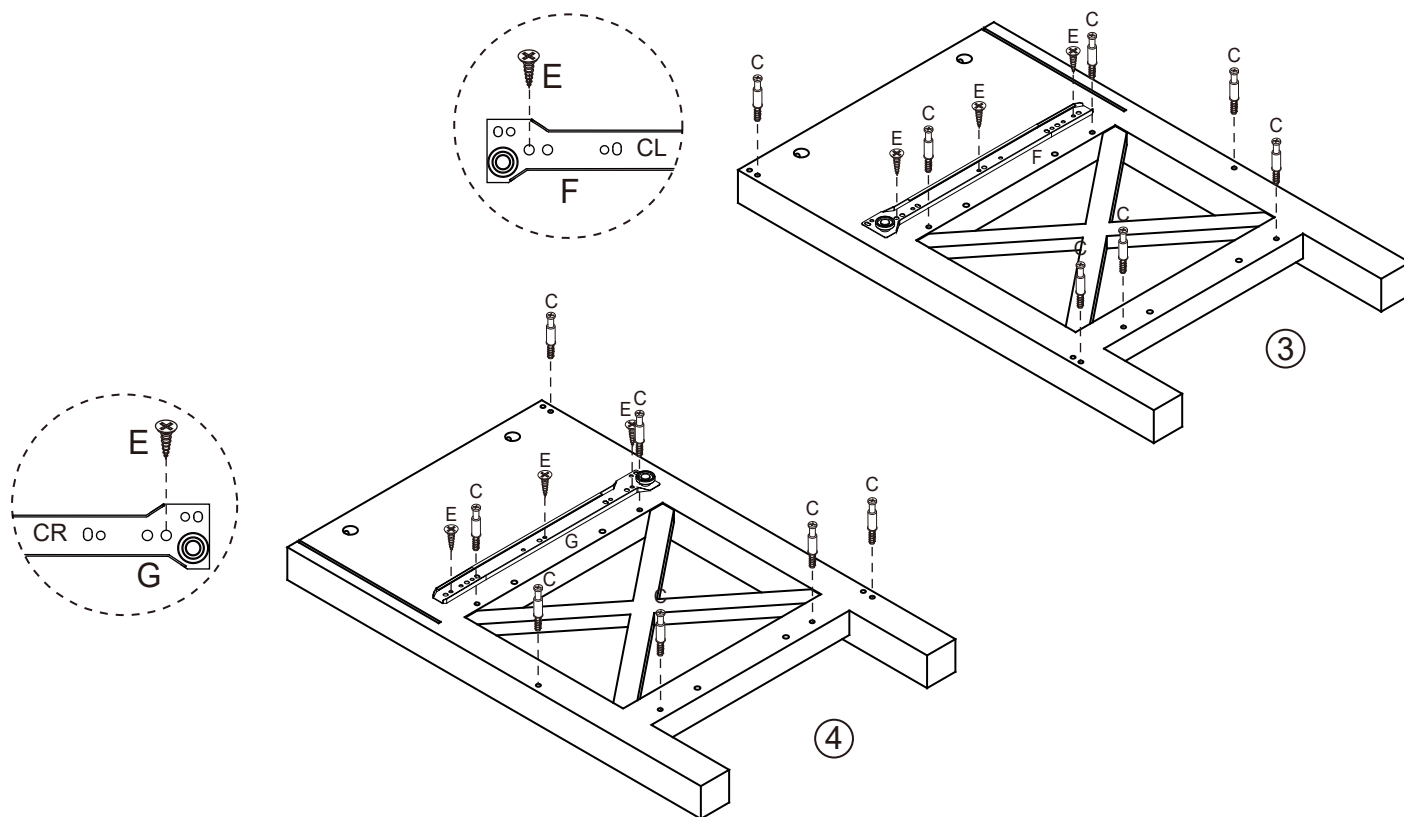


Attach 1 x CL & CR Runner Track (F,G) to Left & Right Side Panel (3 & 4) with 6 x Small Screws (E). Tighten with a Phillips Head Screwdriver. Attach 14 x Cam Bolts (C) to Left & Right Side Panel (3 & 4). Tighten with a Phillips Head Screwdriver.

Step 4:

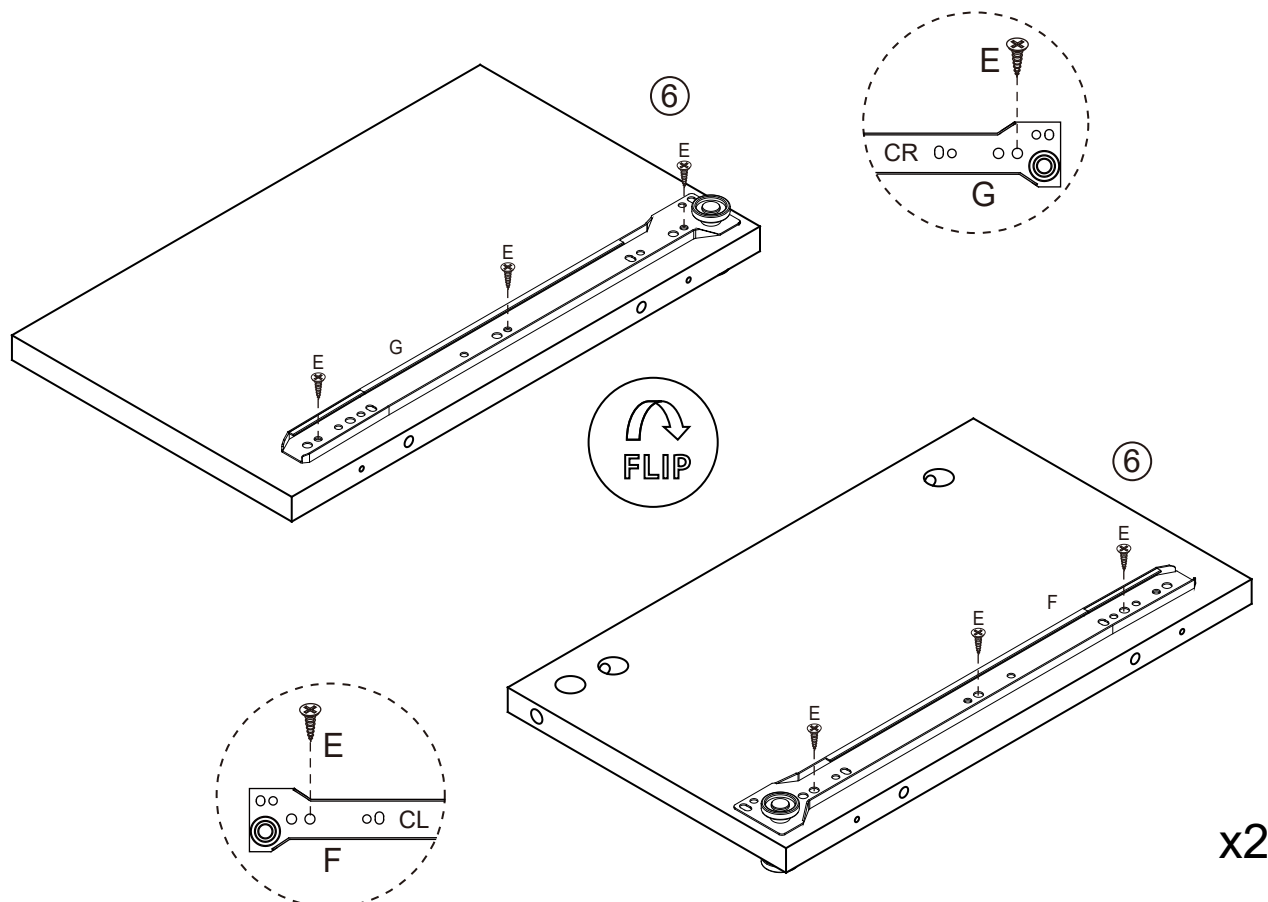


Attach 2 x CL & CR Runner Track (F,G) to Left & Right Side Panel (6) with 12 x Small Screws (E). Tighten with a Phillips Head Screwdriver.

Step 5:

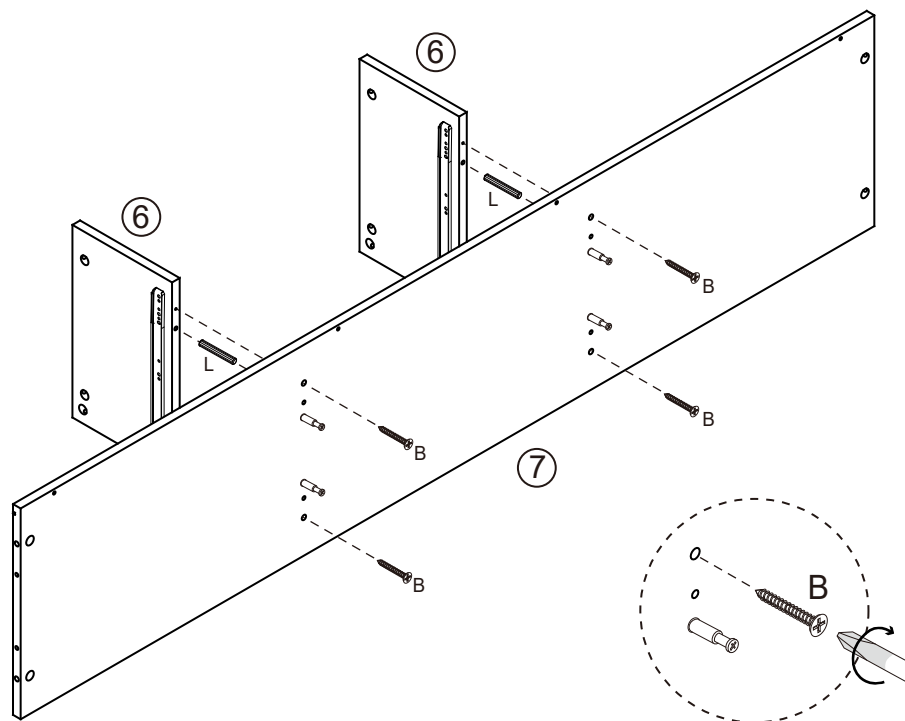


Insert 4 x Long Dowels (L) into Divider (6). Attach Shelf panel (7) to Divider (6) with 4 x Screws (B). Tighten with the Phillips Head Screwdriver.

Step 6:

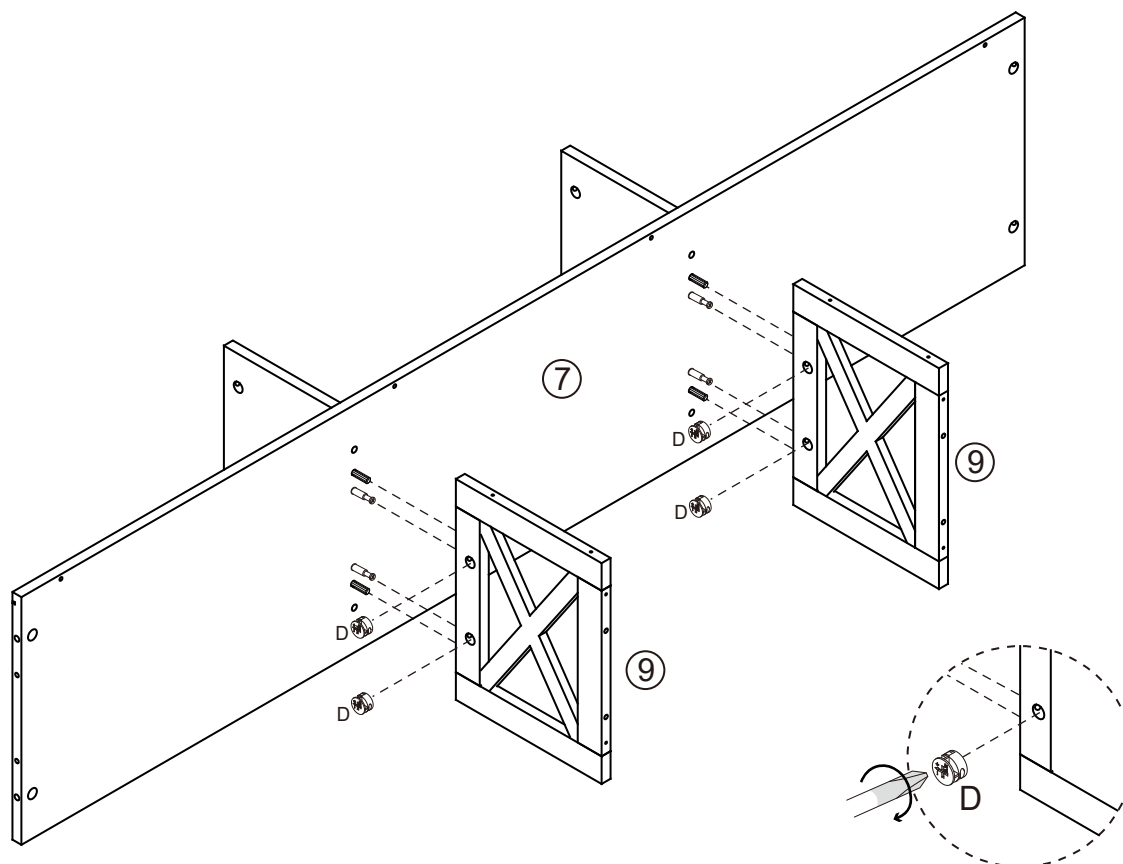


Insert 4 x Cam Nuts (D) into Divider (9). Rotate the cam nuts so the arrow points towards the incoming cam bolts. Attach Divider (9) to Shelf panel (7) by tightening all nuts with the Phillips Head Screwdriver.

Step 7:

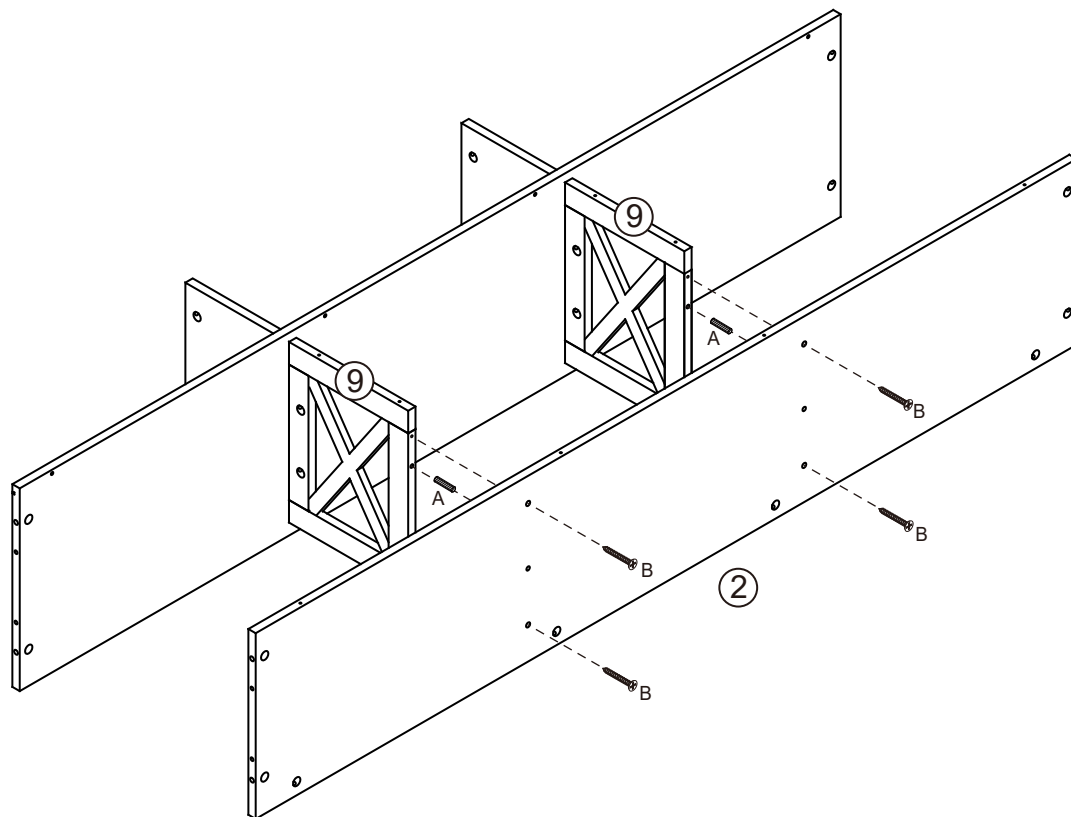


Insert 4 x Dowels (A) into Divider (9). Attach Bottom panel (2) to Divider (9) with 4 x Screws (B). Tighten with the Phillips Head Screwdriver.

Step 8:

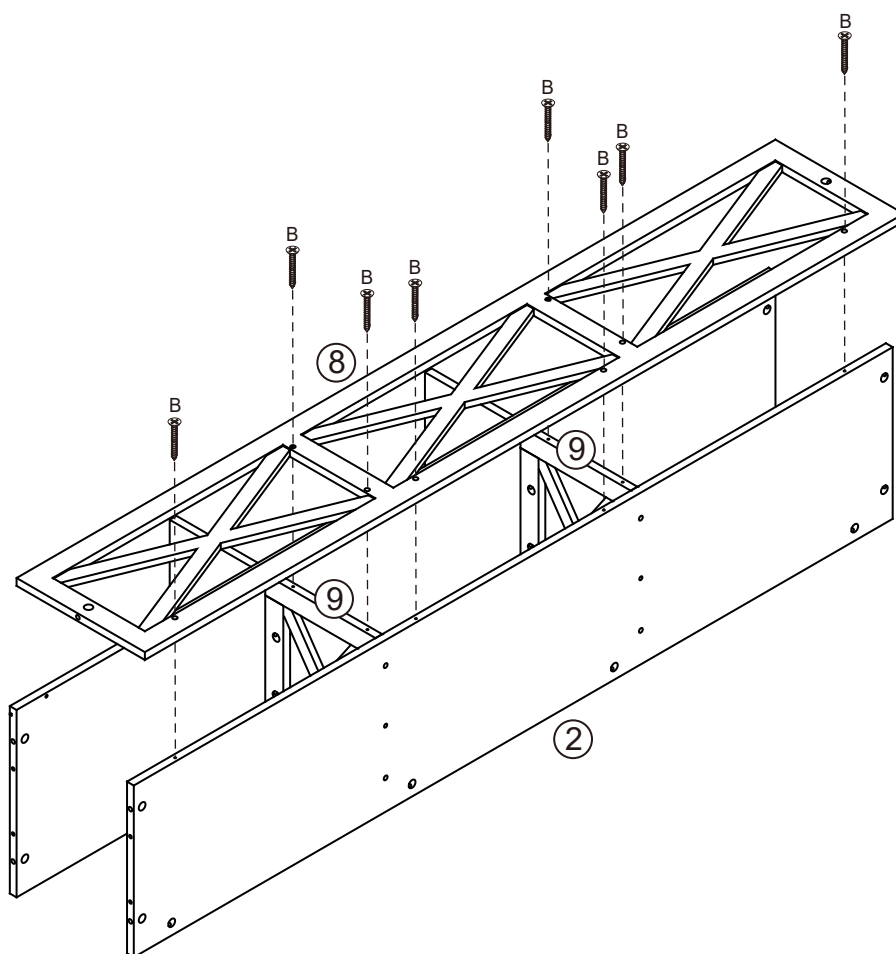


Attach Back panel (8) to Bottom Panel (2) and Divider (9) with 8 x Screws (B). Tighten with the Phillips Head Screwdriver.

Step 9:

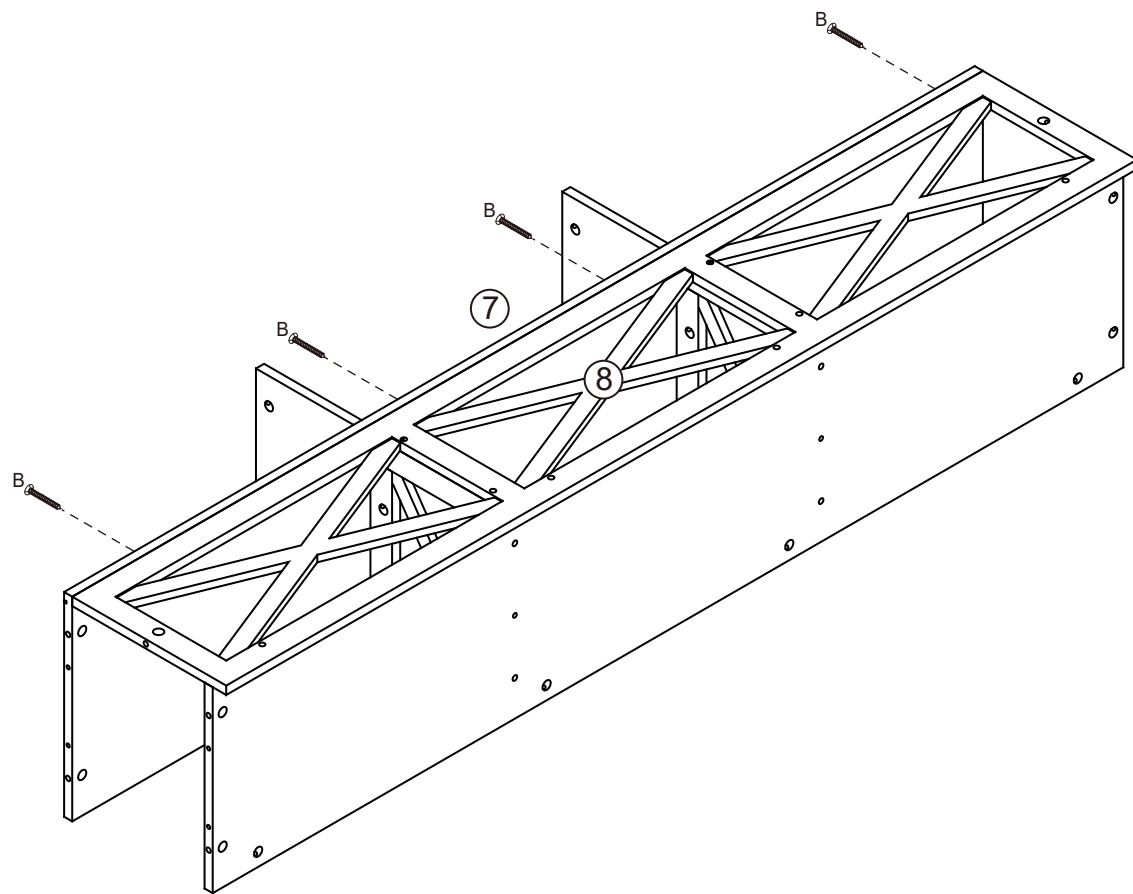


Attach Shelf panel (7) to Back panel (8) with 4 x Screws (B). Tighten with the Phillips Head Screwdriver

Step 10:

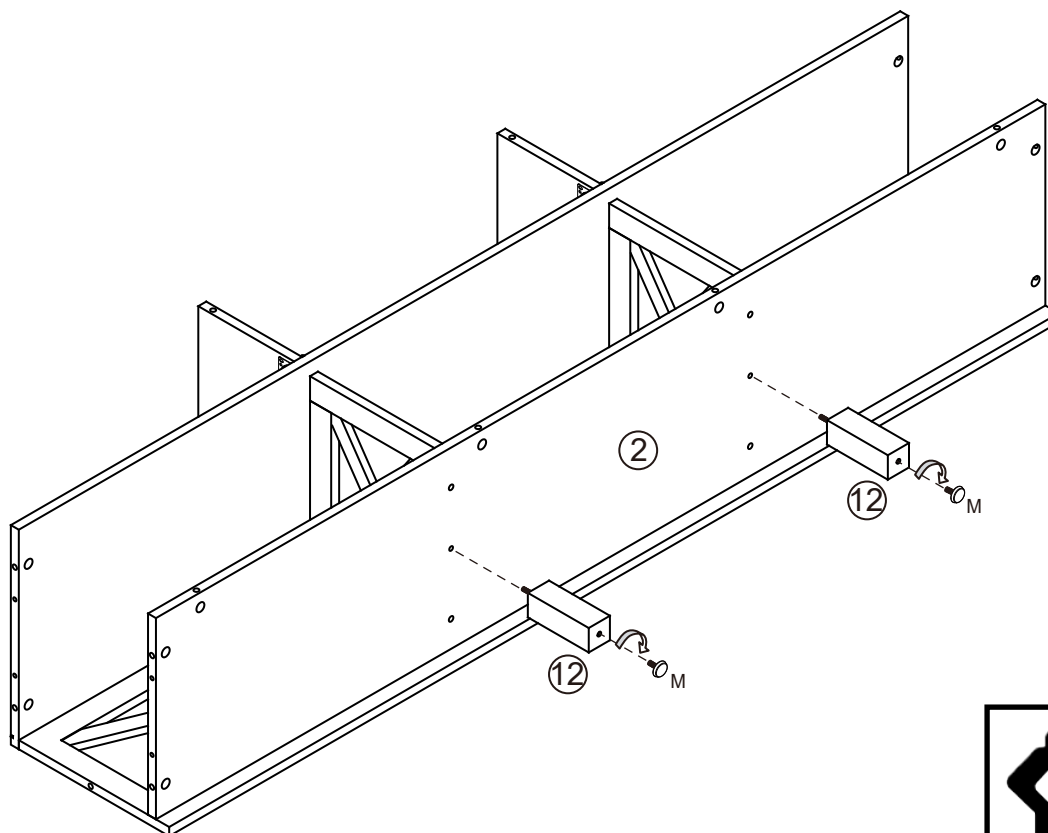


Attach 2 x Support Legs (12) to Bottom Panel (2). Insert the 2 x Adjusters (M) into the 2 x Support Legs (12).

Step 11:

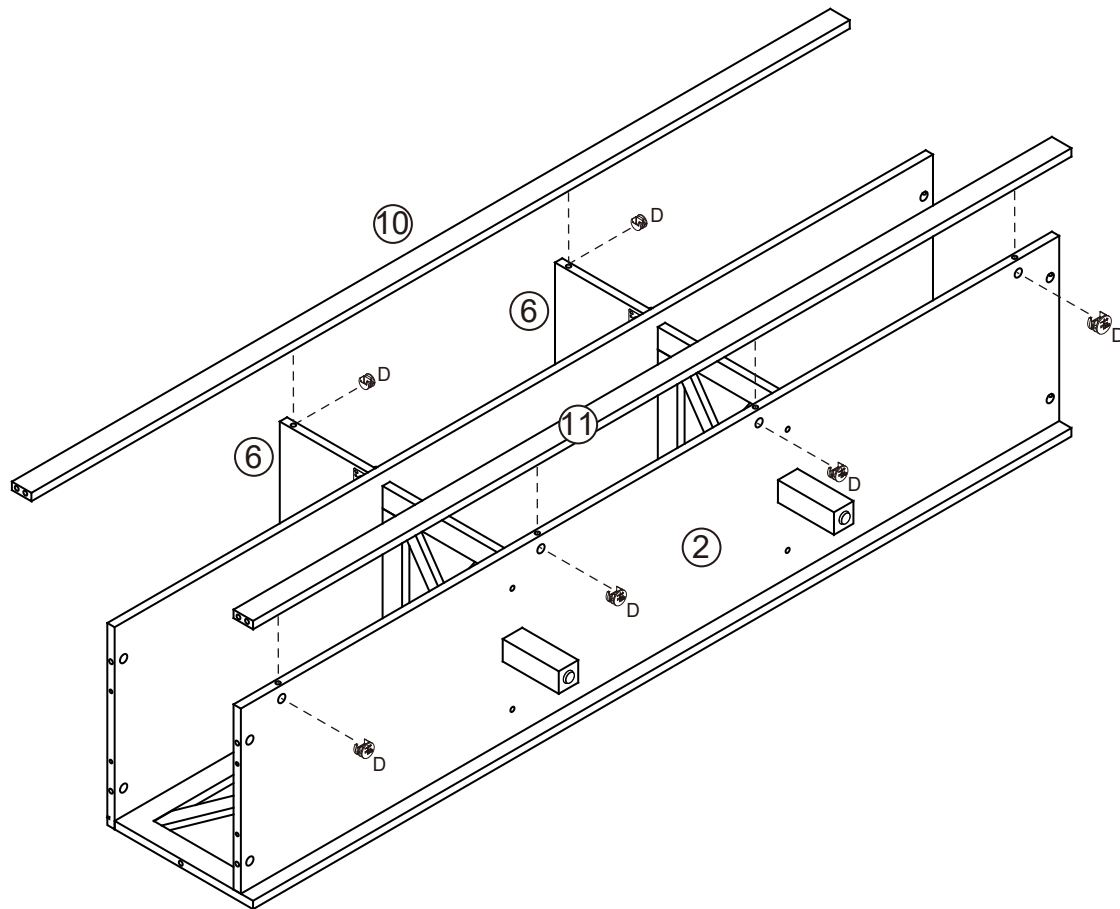


Insert 2 x Cam Nuts (D) into Divider (6) and Insert 4 x Cam Nuts (D) into Bottom Panel (2). Rotate the cam nuts so the arrow points towards the incoming cam bolts. Attach Rails (10 & 11) to Divider (6) and Bottom Panel (2) by tightening with the Phillips Head Screwdriver.

Step 12:

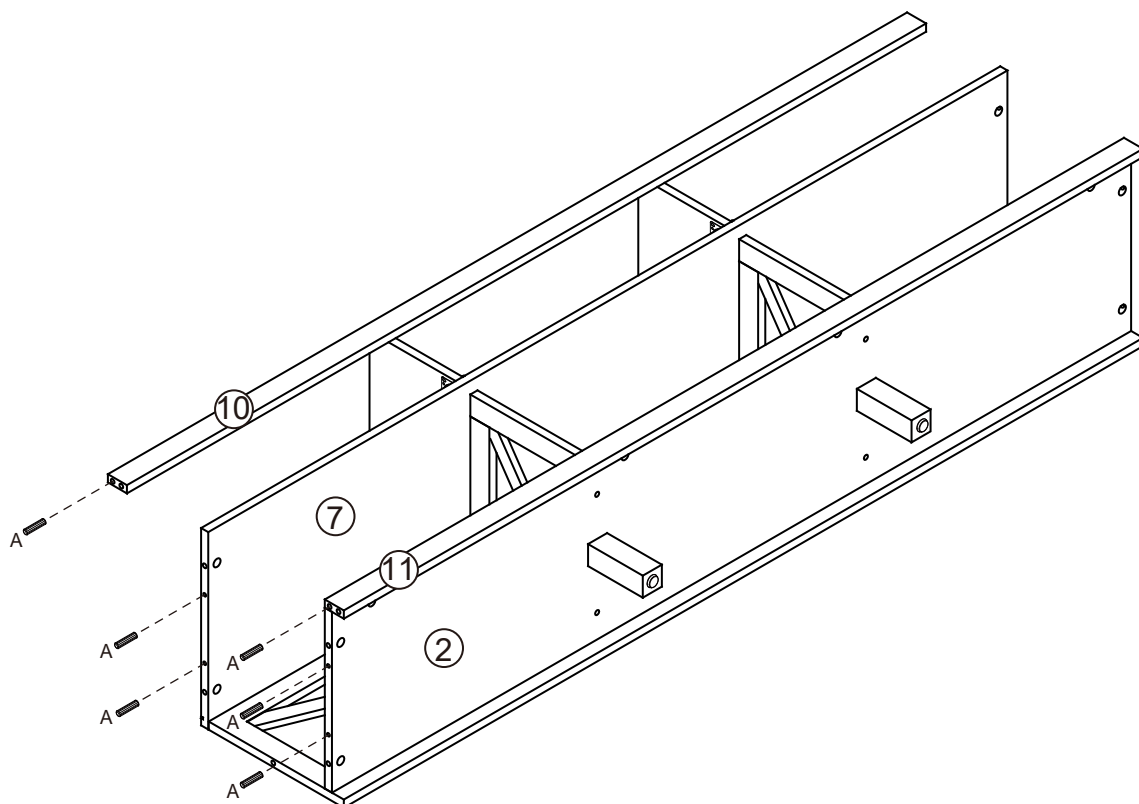


Insert 6 x Dowels (A) into Rails (10 & 11), Shelf Panel (7) and Bottom Panel (2) as shown.

Step 13:

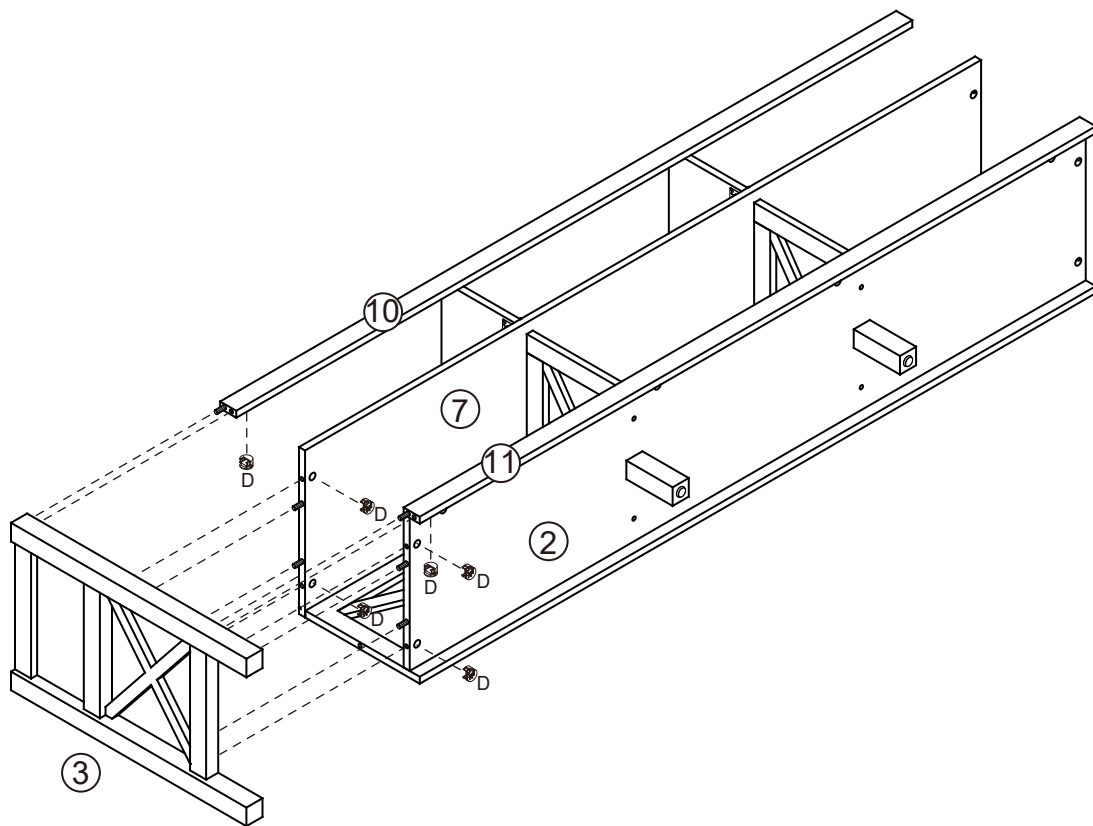


Insert 6 x Cam Nuts (D) into the Rails (10 & 11), Shelf Panel (7) and Bottom Panel (2). Rotate the cam nuts so the arrows point towards the incoming cam bolts. Attach Left Side Panel (3) to Rails (10 & 11), Shelf Panel (7) and Bottom Panel (2) by tightening all nuts with the Phillips Head Screwdriver.

Step 14:

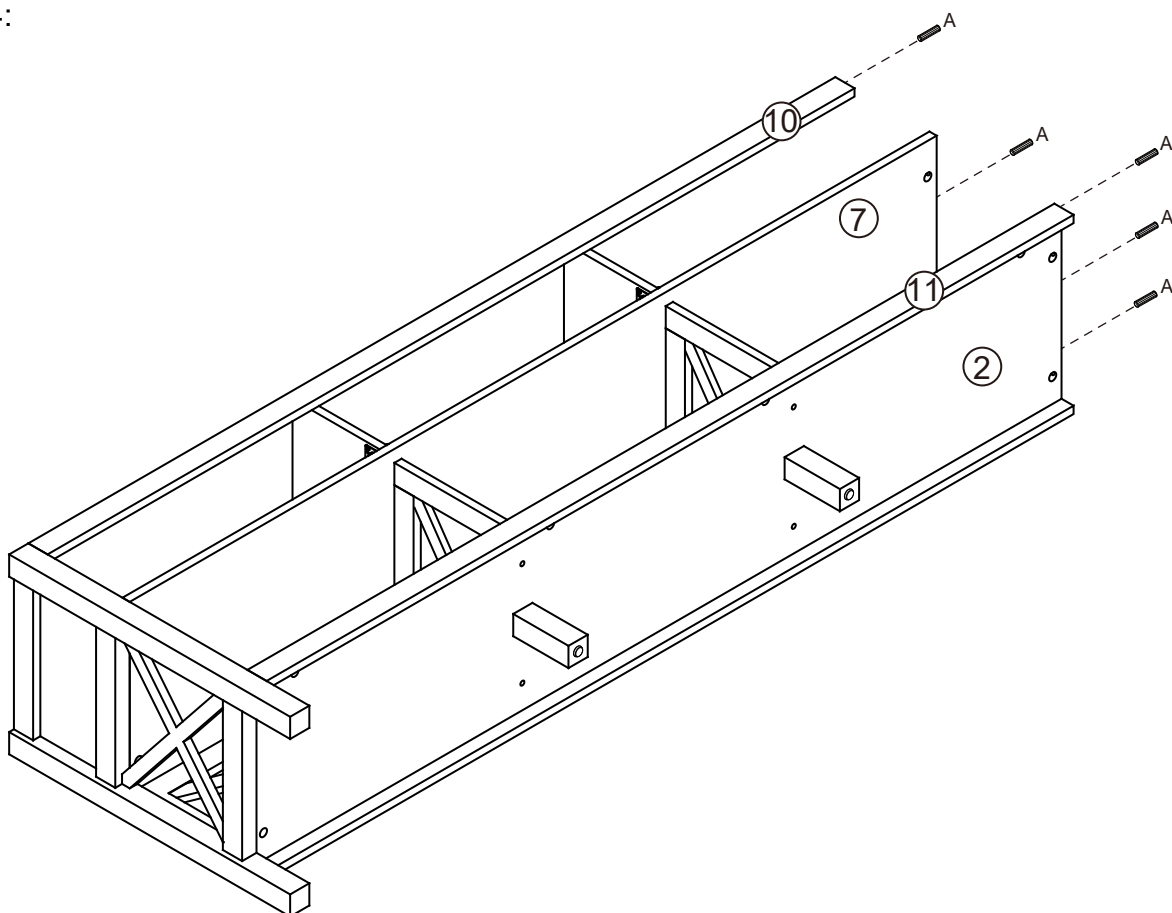


Insert 6 x Dowels (A) into Rails (10 & 11), Shelf Panel (7) and Bottom Panel (2) as shown.

Step 15:

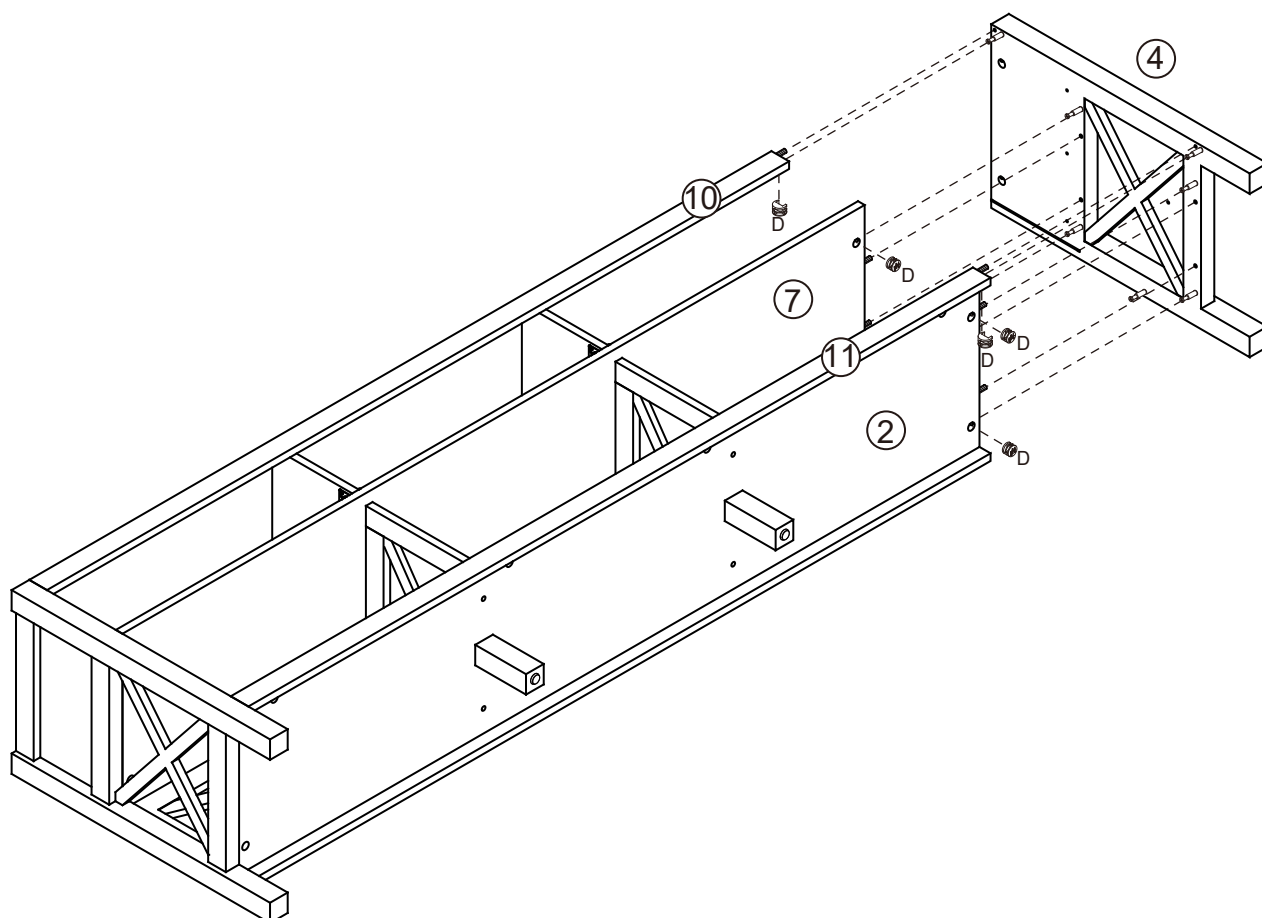


Insert 6 x Cam Nuts (D) into the Rails (10 & 11), Shelf Panel (7) and Bottom Panel (2). Rotate the cam nuts so the arrows point towards the incoming cam bolts. Attach Right Side Panel (4) to Rails (10 & 11), Shelf Panel (7) and Bottom Panel (2) by tightening all nuts with the Phillips Head Screwdriver.

Step 16:

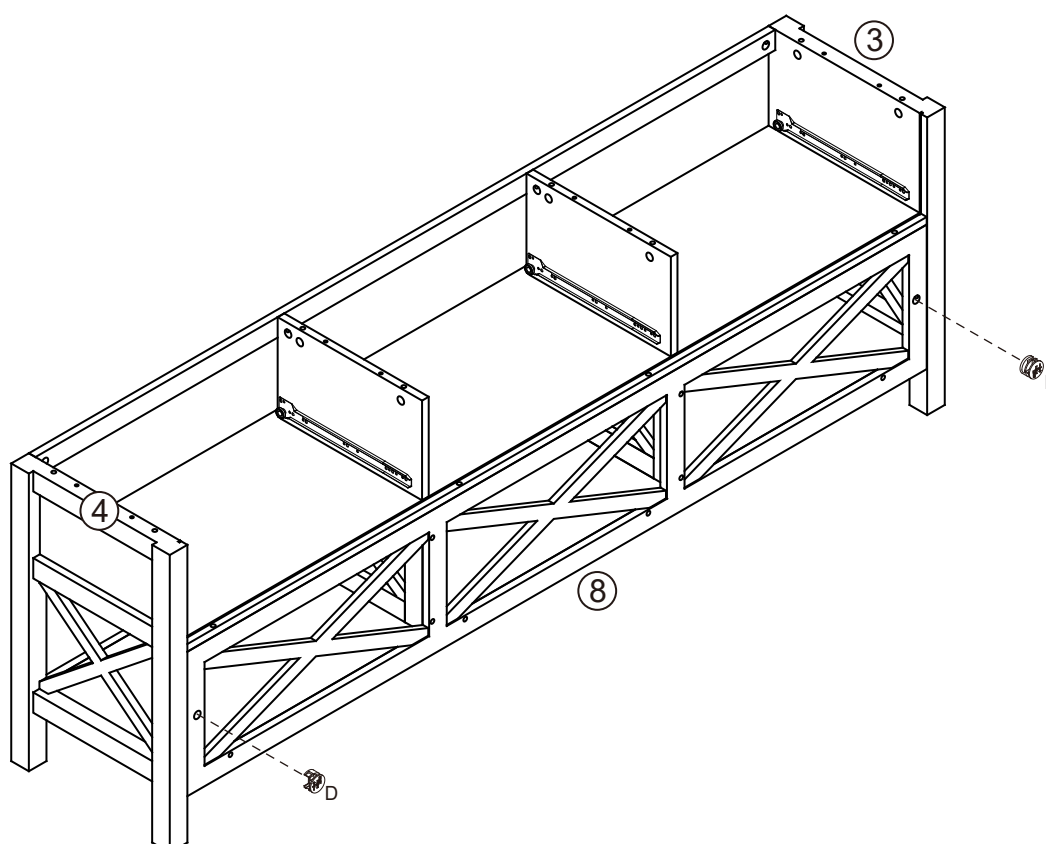


Insert 2 x Cam Nuts (D) into Back Panel (8). Rotate the cam nuts so the arrow points towards the incoming cam bolts. Attach Left & Right Sides Panel (3 & 4) to Back Panel (8) by tightening all nuts with the Phillips Head Screwdriver.

Step 17:

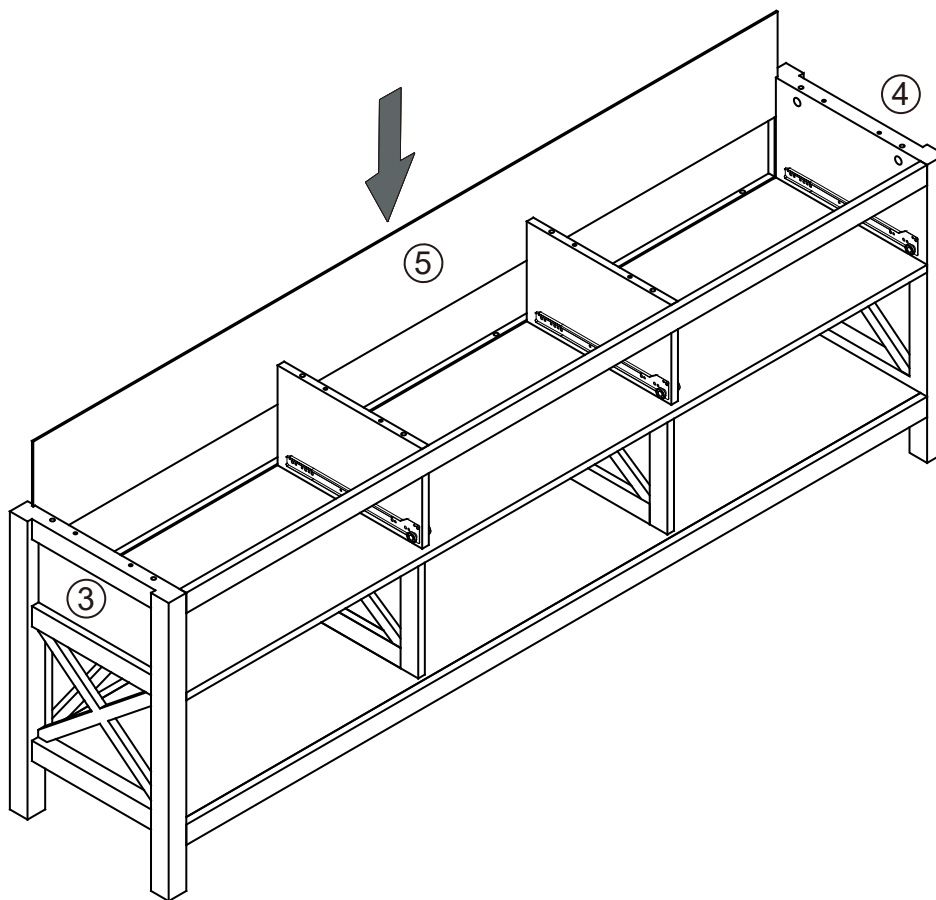


Slide Back Panel (5) into the Left & Right Side Panel (3 & 4).

Step 18:

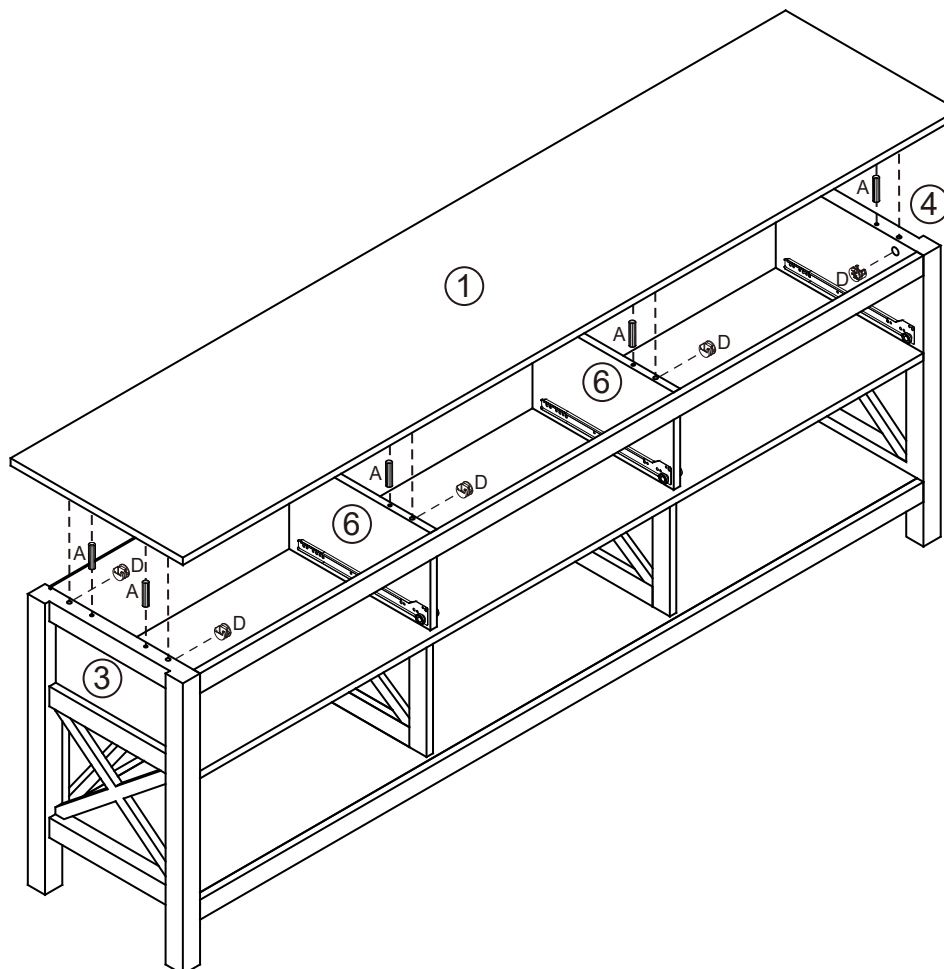

Insert 8 x Dowels (A) into the Left & Right Side Panel (3 & 4) and Divider (6). Insert 8 x Cam Nuts (D) into the Left & Right Side Panel (3 & 4) and Divider (6). Rotate the cam nuts so the arrows point towards the incoming cam bolts. Attach Top Panel (1) to Left & Right Side Panel (3 & 4) and Divider (6) by tightening all nuts with the Phillips Head Screwdriver.


Step 19:

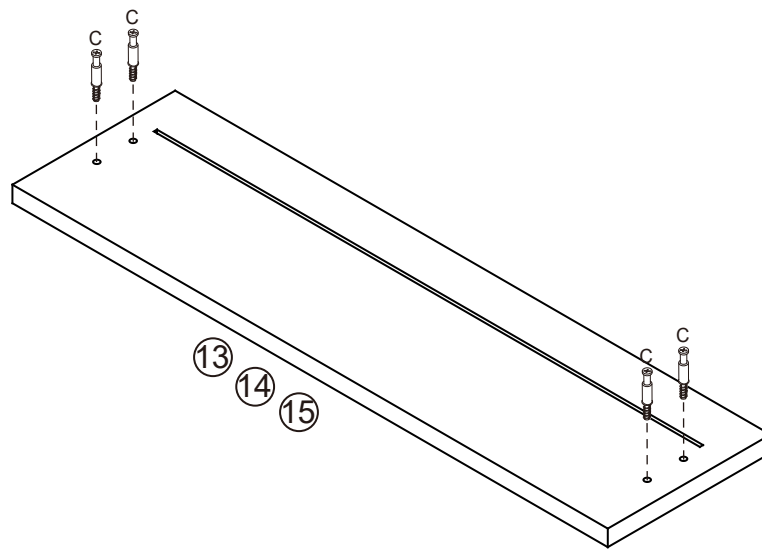

Drawer x3

Attach 12 x Cam Bolts (C) into Drawer Front (13 & 14 & 15). Tighten with a Phillips Head Screwdriver.


Step 20:

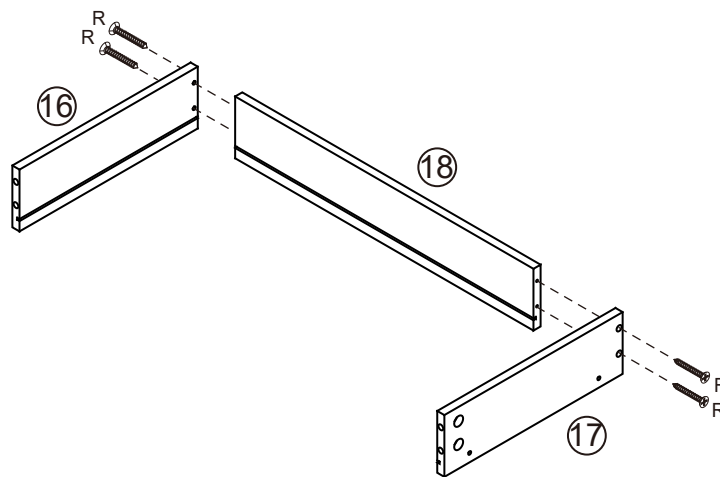

Drawer x3

Attach Left & Right Drawer Sides (16 & 17) to Drawer Back (18) with 12 x Screws (R). Make sure that the groove lines up the whole way around the drawer.


Step 21:

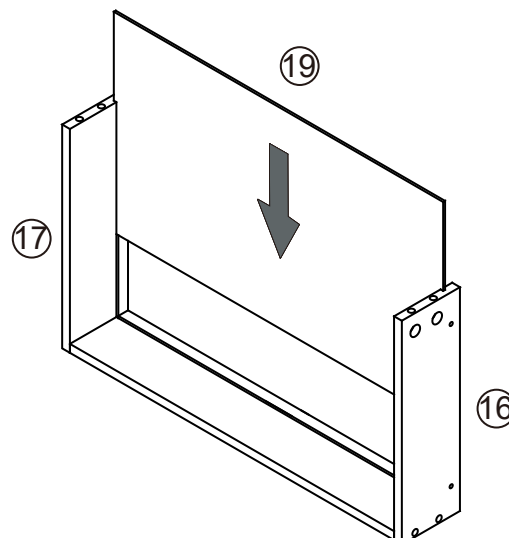

Drawer x3

Slide Drawer Base (19) into the grooves of Left & Right Drawer Sides (16 & 17).


Step 22:

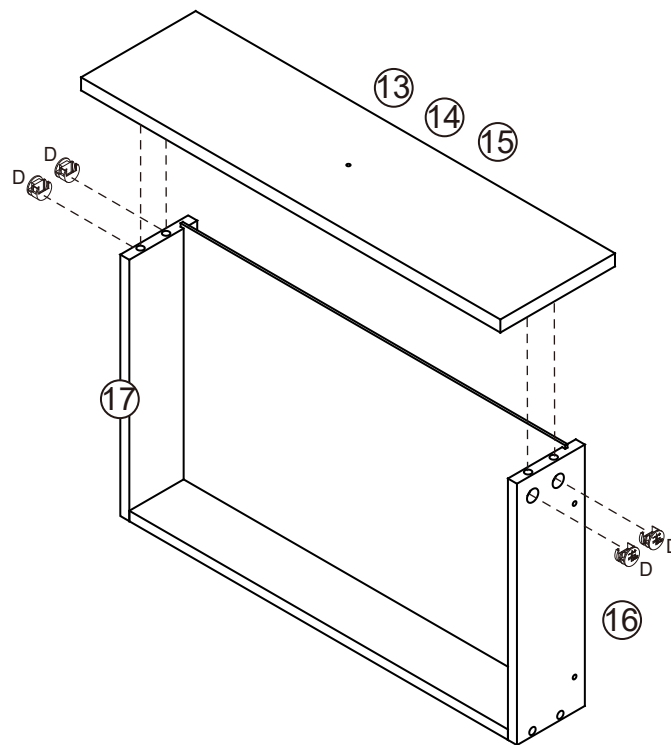

Drawer x3

Insert 12 x Cam Nuts (D) into Left & Right Drawer Sides (16 & 17) as shown. Rotate the cam nuts so the arrows point towards the incoming cam bolts. Attach Drawer Fronts (13 & 14 & 15) to Left & Right Drawer Sides (16 & 17). Make sure that the groove lines up the whole way around the drawer. Tighten with a Phillips Head Screwdriver.


Step 23:

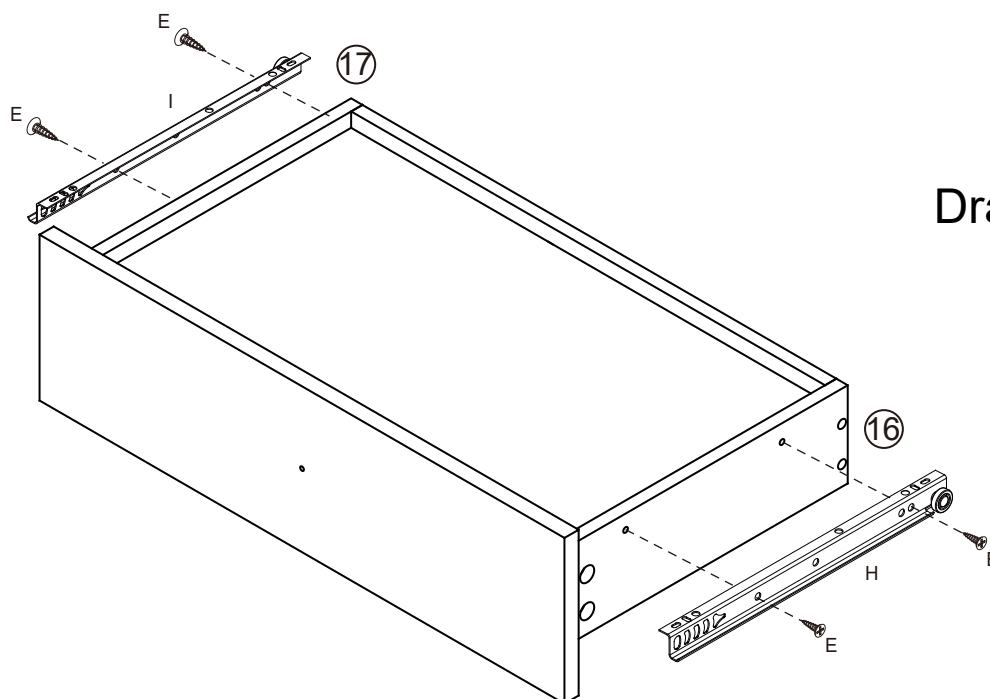

Drawer x3

Attach 3 x DL Runners (H) to the bottom of Left Drawer Side (16) and 3 x DR Runners (I) to the bottom of Right Drawer Side (17) with 12 x Small Screws (E) by tightening with the Phillips Head Screwdriver.


Step 24:

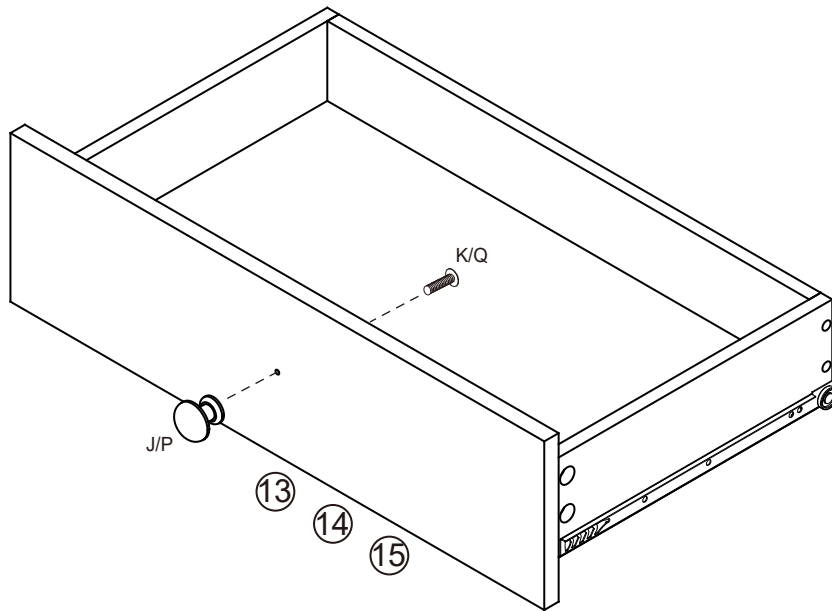

Drawer x3


Attach 3 x Handles (J / P) to Drawer Front (13 & 14 & 15) with 3 x Screws (K / Q) as shown. Tighten with the Phillips Head Screwdriver.

Step 25:

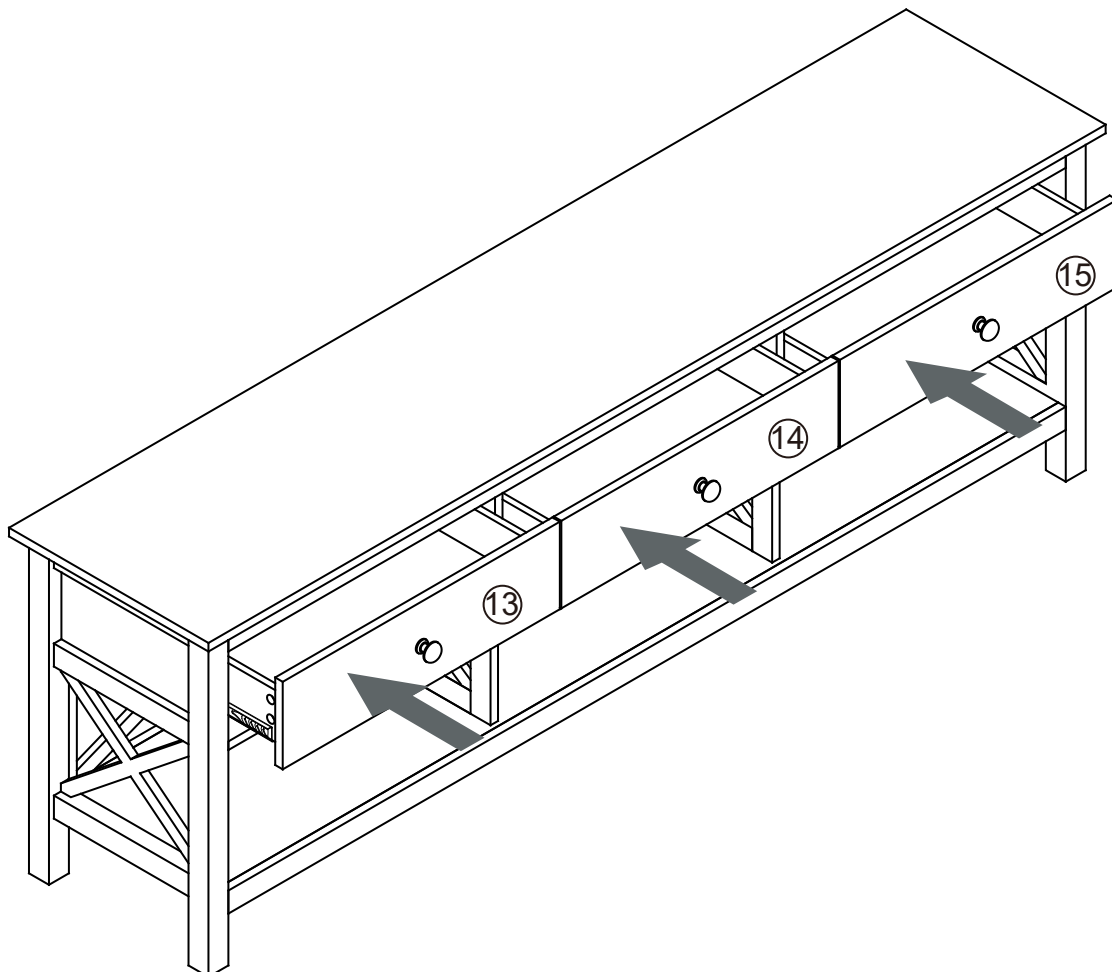


Insert the assembled drawers into the corresponding compartments as shown.

Step 26:

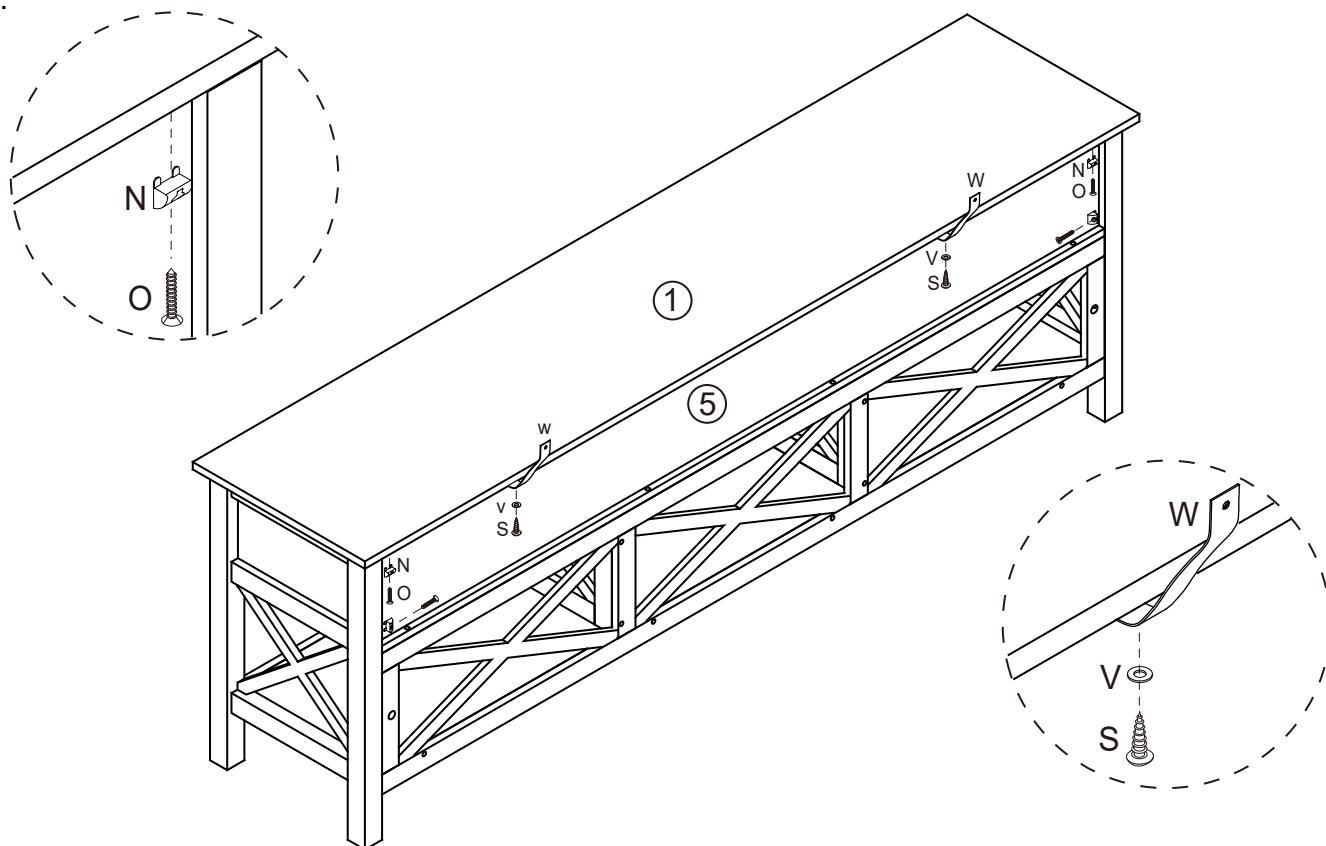

Attach 2 x safety straps (W) to the Top panel (1) as shown using 2 x washers (V) and 2 x screws (S). Tighten with the Phillips Head Screwdriver. Secure Back Panel (5) in place with 4 x Wedges (N) using 4 x Wedge Screws (O) by tightening with the Phillips Head Screwdriver.

Step 27:

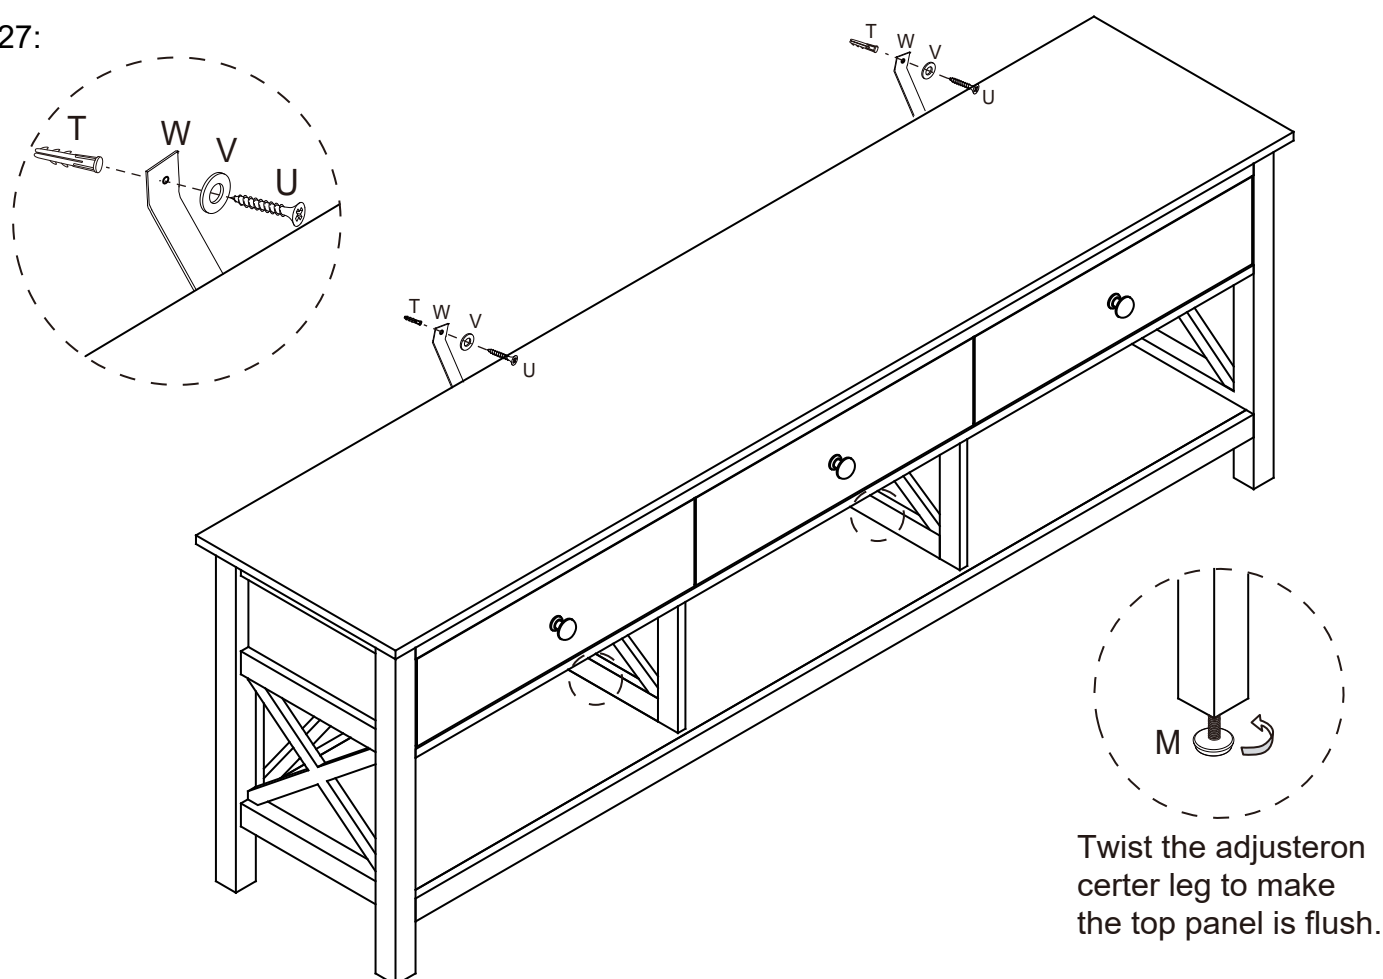

Move the unit to the final position, and attach the safety strap to the wall securely. Fasten the safety strap to your wall using appropriate fixings for your wall type. If you are unsure, please seek professional advice on how to attach this safety strap to your specific wall.



WARNING

It is STRONGLY RECOMMENDED that you ANCHOR this product.

Toppling furniture can cause serious injuries and death.

This product has been provided with an anchor strap. To prevent your furniture from tipping forward it is strongly recommended that you securely attach this product to a wall or other solid surface, using the anchor strap provided and appropriate fixings.

IMPORTANT:

Regularly check that anchors are securely maintained.

Stability of tall items may be affected by thick pile carpet or uneven floors.

CAUTION:

- For your safety when attaching the anchor fixings, please note the following:
Check for any electrical wires or plumbing inside the wall before drilling any holes (if you are unsure please seek professional advice from a qualified tradesperson)
- Walls are constructed from different materials, for example, masonry (solid brick) or plasterboard lined cavity walls (hollow). It is important that you use the appropriate wall fixings for your wall type.
- Your local hardware store will have the necessary drills and fixings and can offer advice if needed. If in doubt, engage the services of a qualified tradesperson to install and anchor the product.