

**Kingscliff Whitewash
2 Drawer Bedside Table**

Read first, enjoy forever

Assembly tips

- Assemble your product on a level surface and lay something soft underneath to protect potential floor damage.
- Don't over tighten screws. During assembly we recommend tightening to approximately 70% tightness. Only tighten hardware 100% when fully assembled.
- Keep children away from assembly area as bags and small parts can pose a choking hazard.
- Make sure you have enough space to layout parts before starting. We recommend assembling your item in its final location.
- Do not stand on or put weight on the parts as it may warp or damage product.
- We do not recommend the use of drills or power tools (unless specified) as it may damage the product or hardware. Use hand held screwdrivers only.
- It is best that two people assemble the product as some products may be too heavy for one person. Check this booklet for guidance.

Safety, care and maintenance

- To reduce the risk of injury, always secure storage furniture to walls and/or floors by using tip-over restraints.
- Never let children climb or hang on drawers, doors or shelves.
- To protect your product and your home, we recommend using coasters, placemats, rugs and other protective items.
- Screws may loosen over time. We recommend setting a reminder to tighten up every six months.
- Remove any liquid spills immediately using a clean cloth with mild detergent. Do not use bleach or abrasive cleaners. Always test any cleaning agent in an inconspicuous spot first to know if it is suitable.

Recycling

We hope that you love your product forever, but we know situations change. In the event that you wish to dispose of your product please consider some creative ways to give it a new home:

- If it's still in great shape, sell it on your favourite online marketplace!
- Give it a second life by affording it a fresh coat of paint.
- If you must dispose of it, why not donate it to your local charity or shelter for someone else to enjoy.

Please dispose of this product and packaging responsibly and recycle where possible. Scan the QR code to read more about Temple and Webster's commitment to a more sustainable future.



Important safety instructions

DANGER!

Children have died from furniture tip over.

Toppling Hazard Warning


- ALWAYS secure items with an anchor device
- For safety reasons, we recommend you follow the provided instructions
- When installed properly, the provided hardware may prevent the unit from tipping over unexpectedly.
- Never let children climb or hang on drawers, doors or shelves.
- NEVER open more than one drawer at a time
- Place heavy items down low
- For advice on suitable fastening devices, contact your local specialized dealer



Parts List

ASSEMBLY INSTRUCTIONS


Kingscliff Whitewash 2 Drawer Bedside Table FJKCBTWW

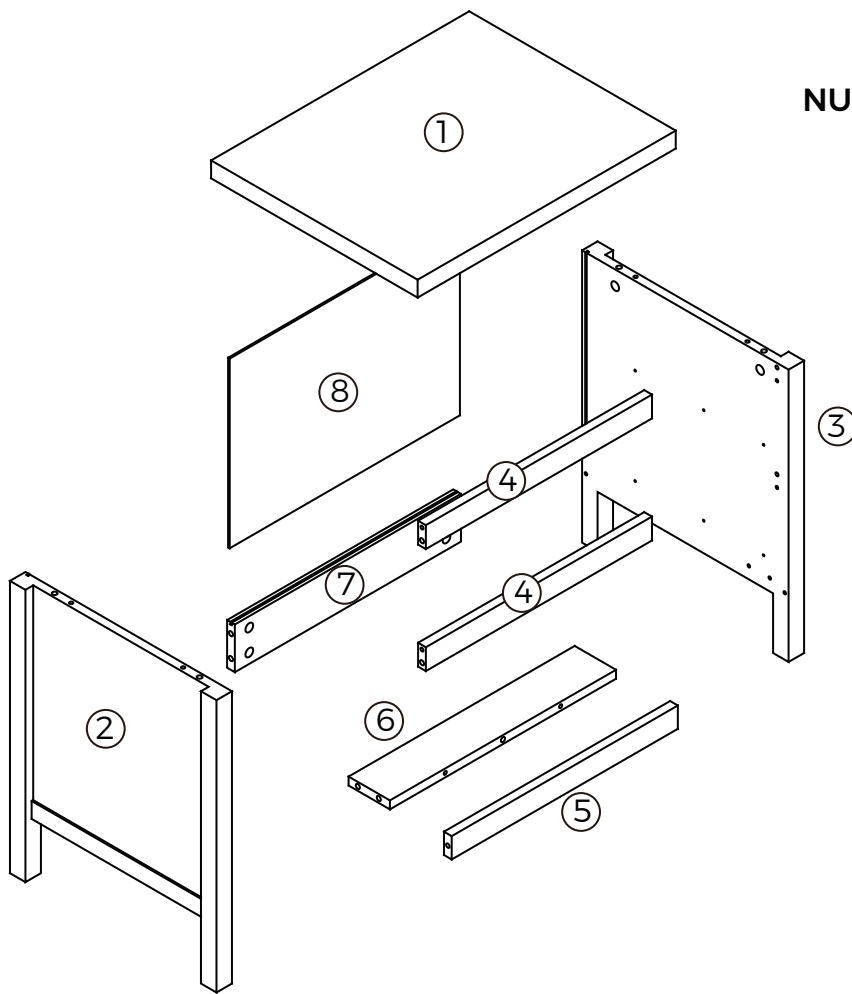







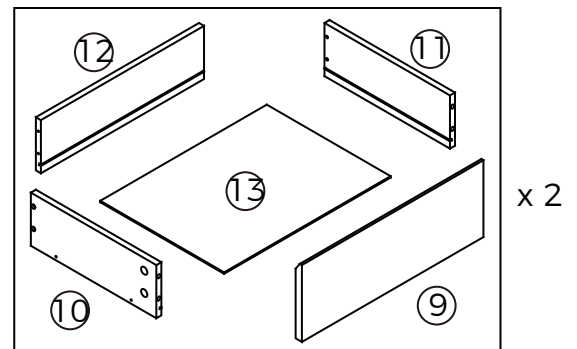









NUMBER OF PEOPLE REQUIRED FOR
ASSEMBLY:

1

TOOLS REQUIRED FOR
ASSEMBLY







Hardware

A	B	C	D	E	F	G	H
							
Dowels x12	Screws x8	Cam Bolts x25	Cam Nuts x25	Small Screws x20	CL Runner Tracks x2	CR Runner Tracks x2	DL Runners x2
I	J	K	L	M	N	O	P
							
DR Runners x2	Wedges x4	Screw x4	Safety Strap x1	Screw x1	Wall Plug x1	Wall Screw x1	Washers x2

1.

Attach 2 x CL Runner Tracks (F) To Left Side Panel [2] with 6 x Small Screws (E). Attach 2 x CR Runner Tracks (G) To Right Side Panel [3] with 6 x Small Screws (E).

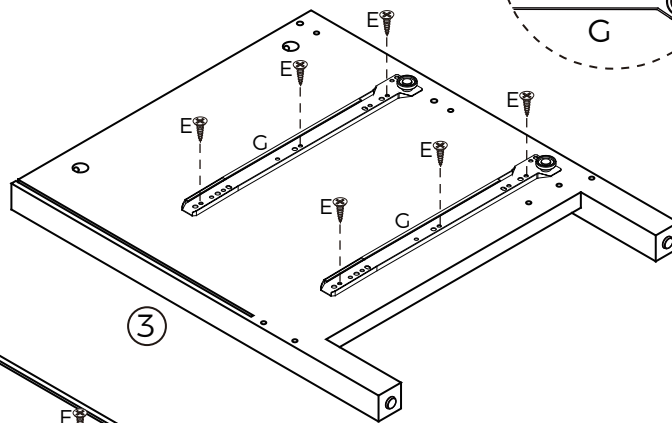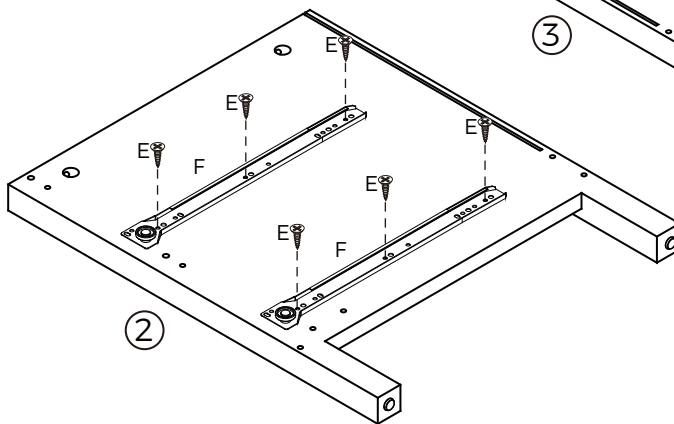


You will need



2.

Attach 12 x Cam Bolts (C) to Left & Right Side Panels [2,3].

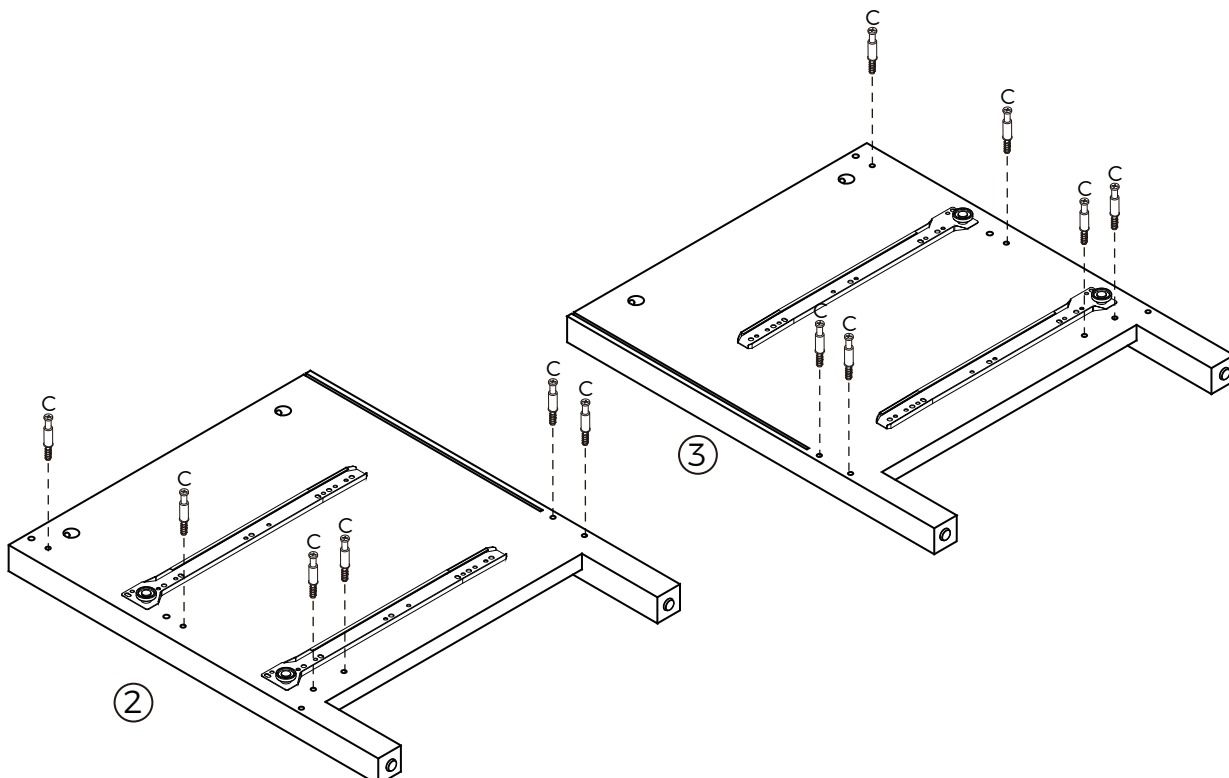

You will need




**TEMPLE &
WEBSTER**


Damaged or missing parts? Or just need help?
Contact us on service@templeandwebster.com.au

3.


Attach 1 x Cam Bolt (C) to Rail [5]. Insert 2 x Dowels (A) into Rail [6]. Insert 1 x Cam Nut (D) into the holes of Rail [6]. Rotate the cam nuts so the arrows point towards the incoming cam bolts. Push Rail [5] into place and tighten the cam nuts.

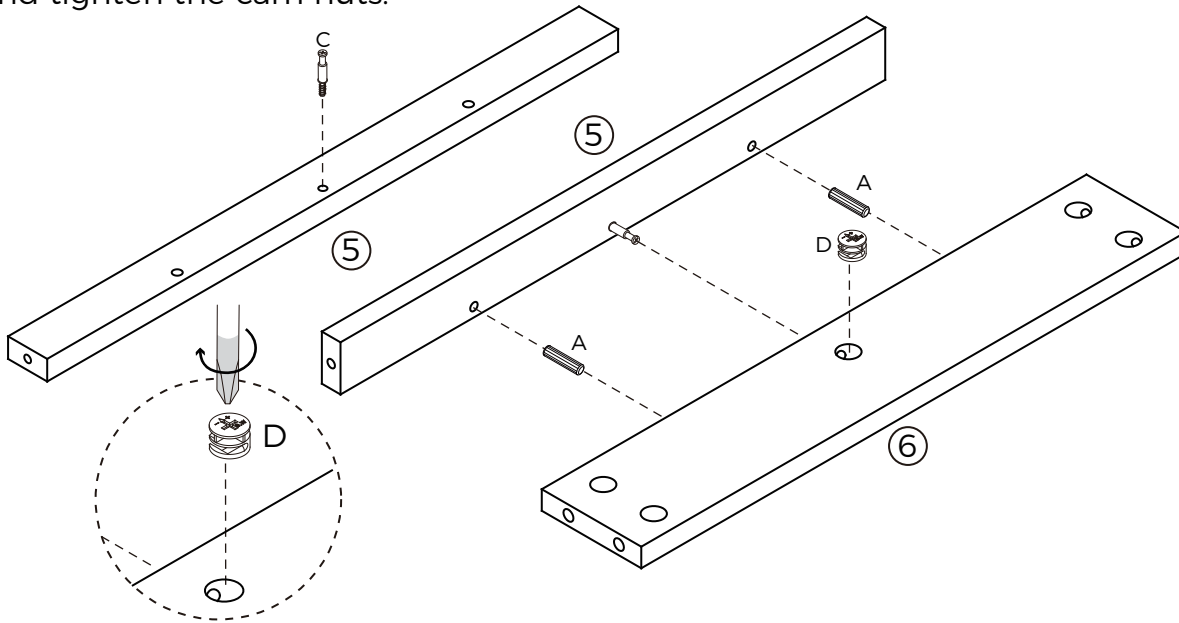

You will need



1 Cam Bolt



2 Dowels




1 Cam Nut




Phillips Head Screwdriver

4.

Insert 3 x Dowels (A) into Left Side Panel [2]. Insert 6 x Cam Nuts (D) into the holes of Rails [4, 6, 7]. Rotate the cam nuts so the arrows point towards the incoming cam bolts. Push Rails [4, 5, 6, 7] into place and tighten the cam nuts.

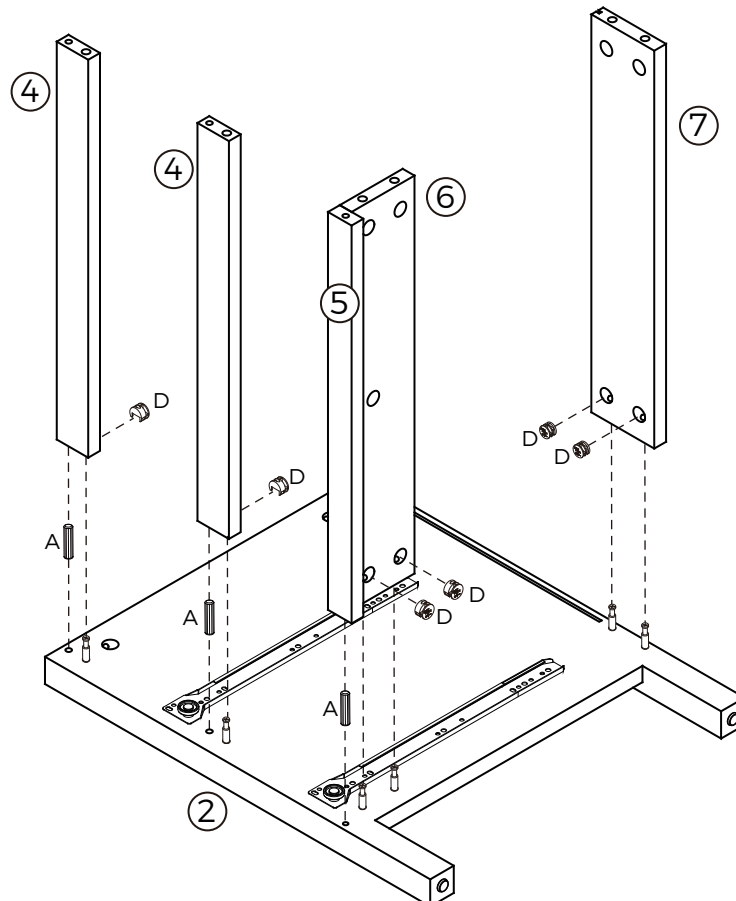

You will need



3 Dowels




6 Cam Nuts




Phillips Head Screwdriver

5.

Insert 3 x Dowels (A) into Rails [4, 5]. Insert 6 x Cam Nuts (D) into the holes of Rails [4, 6, 7]. Rotate the cam nuts so the arrows point towards the incoming cam bolts. Push Right Side Panel [3] into place and tighten the cam nuts.

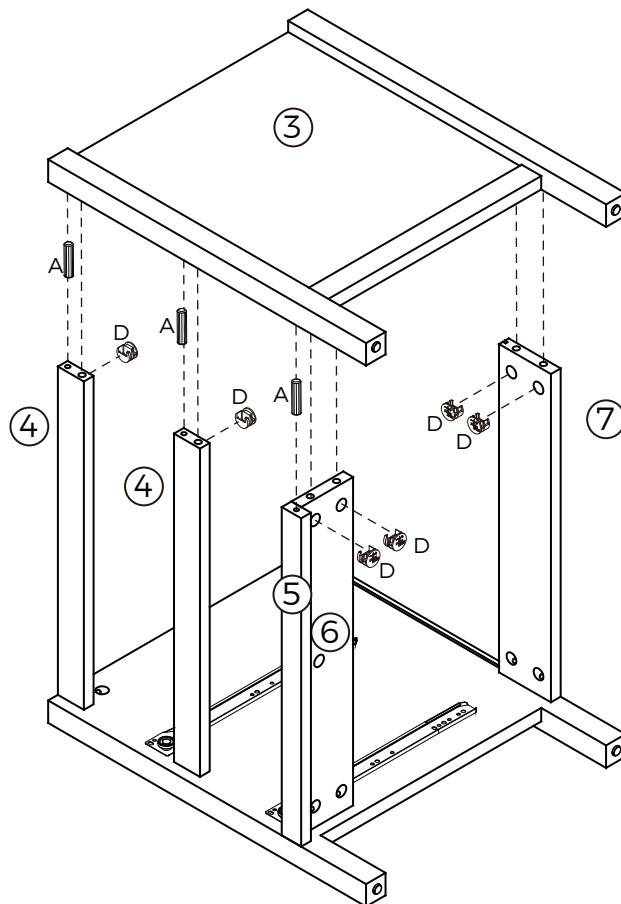

You will need



3 Dowels




6 Cam Nuts



Phillips Head
Screwdriver

6.

Slide Back Panel [8] into the grooves of Left & Right Side Panels [2 & 3].

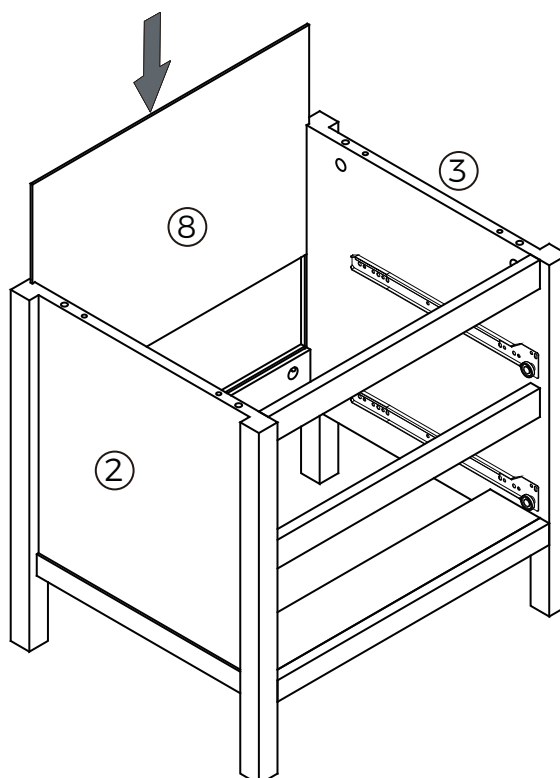


**TEMPLE &
WEBSTER**


Damaged or missing parts? Or just need help?
Contact us on service@templeandwebster.com.au

7.

Attach 4 x Cam Bolts (C) to Top Panel (1).

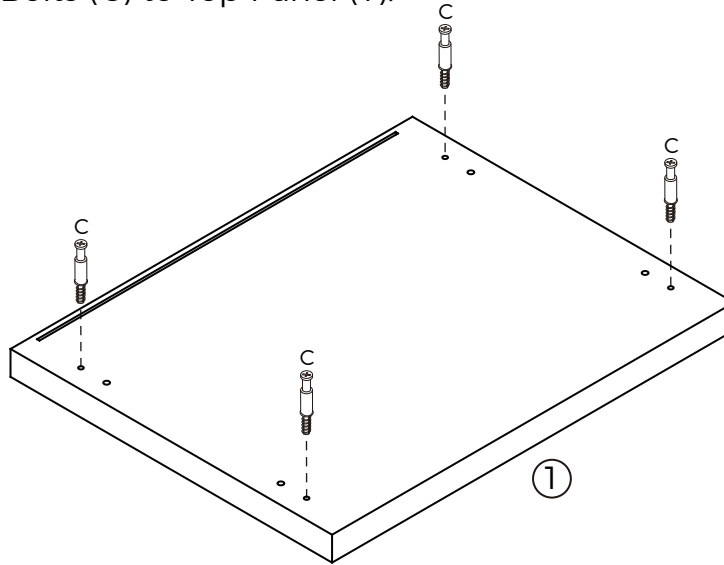

You will need




4 Cam Bolts




Phillips Head
Screwdriver

8.

Insert 4 x Dowels (A) into Left & Right Side Panels [2 & 3].
Insert 4 x Cam Nuts (D) into Left & Right Side Panels [2 & 3].
Rotate the cam nuts so the arrow points towards the incoming cam bolts.
Attach Top Panel [1] to Left & Right Side Panels [2 & 3].

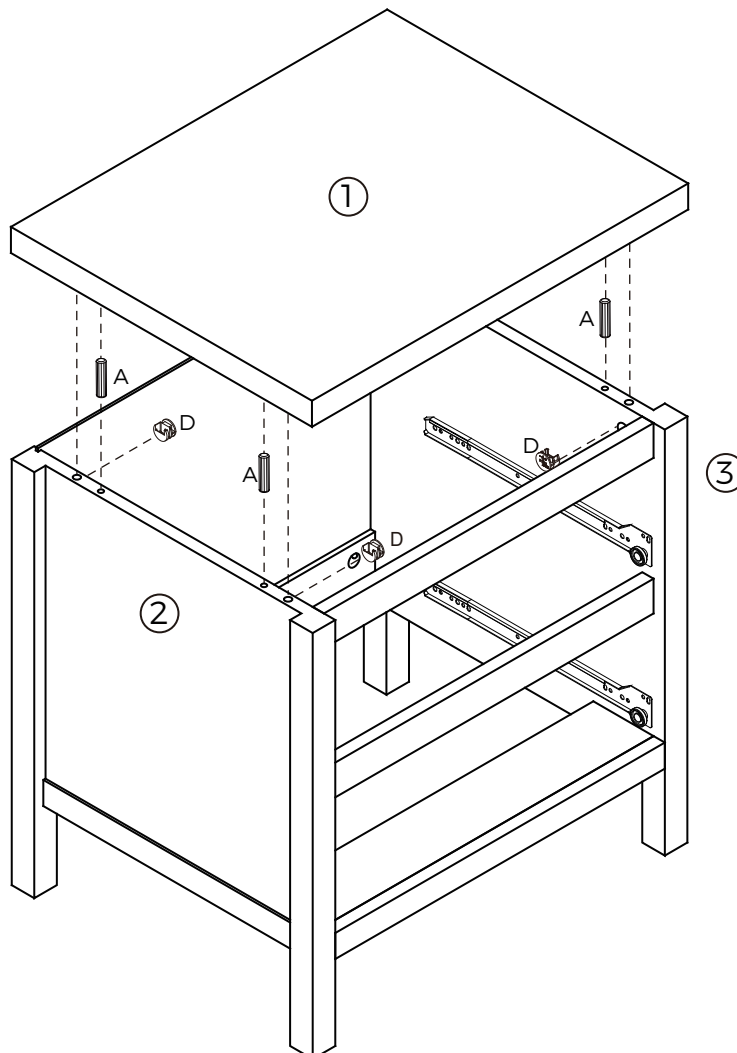

You will need



4 Dowels




4 Cam Nuts



Phillips Head
Screwdriver


9.

Attach 4 x Cam Bolts (C) to Drawer Front [9].

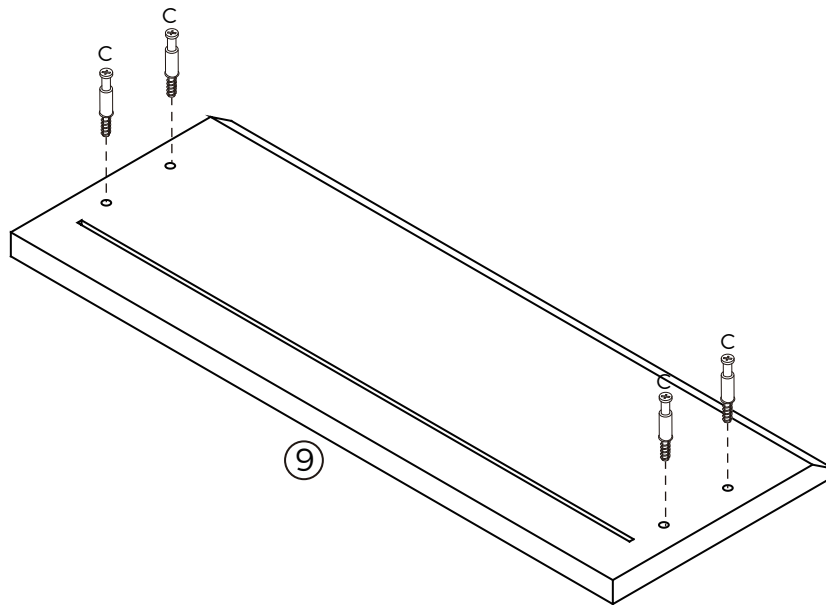

x2

You will need




8 Cam Bolts



Phillips Head
Screwdriver

10.

Attach Drawer Back [12] to Left & Right Drawer Sides [10 & 11] with 4 x Screws (B).

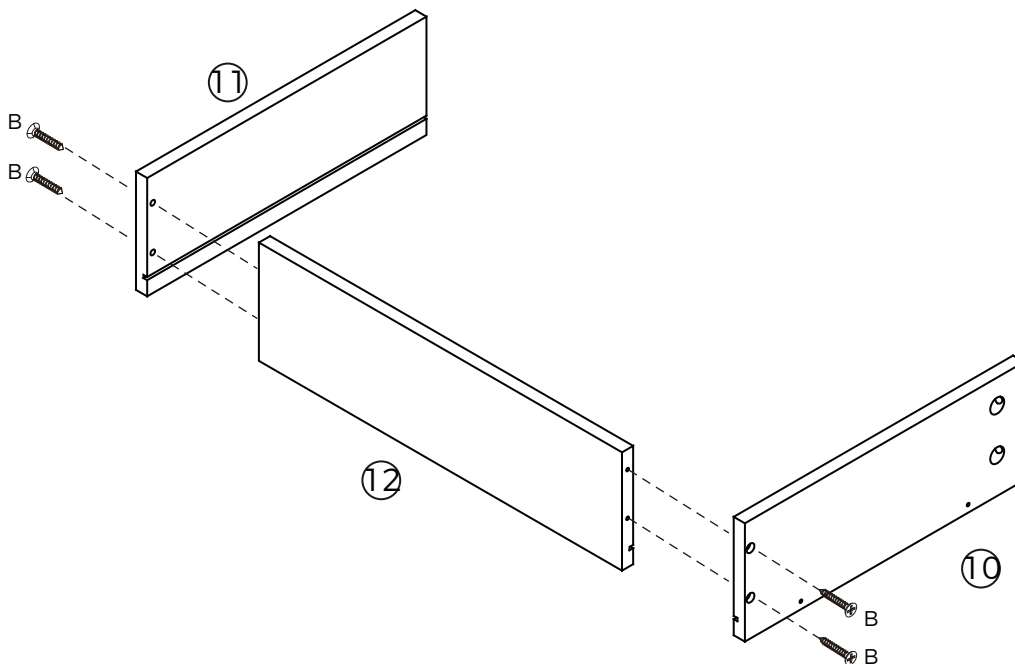

x2

You will need




8 Screws



Phillips Head
Screwdriver

11.


Slide Drawer Base [13] into the grooves of Left & Right Drawer Side [10 & 11].

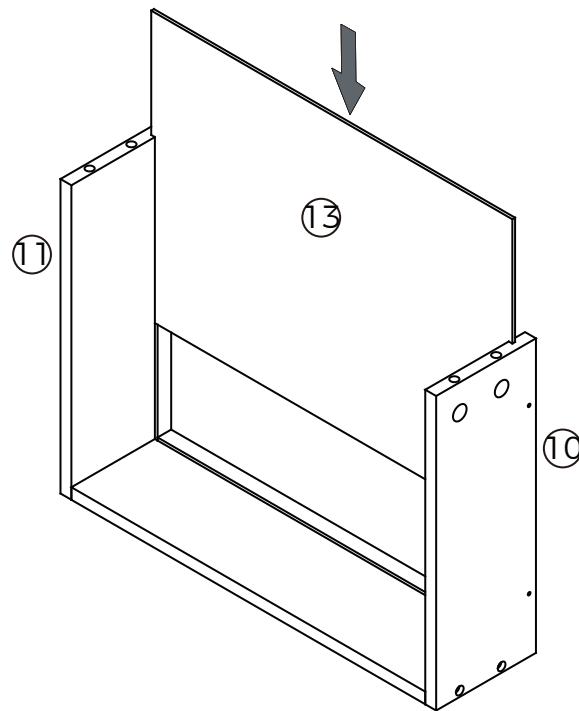

x2

12.

Insert 4 x Cam Nuts (D) into Left & Right Drawer Sides [10 & 11]. Rotate the cam nuts so the arrows point towards the incoming cam bolts. Attach Drawer Front [9] to Left & Right Drawer Sides [10 & 11]. Make sure that the groove lines up the whole way around the drawer.

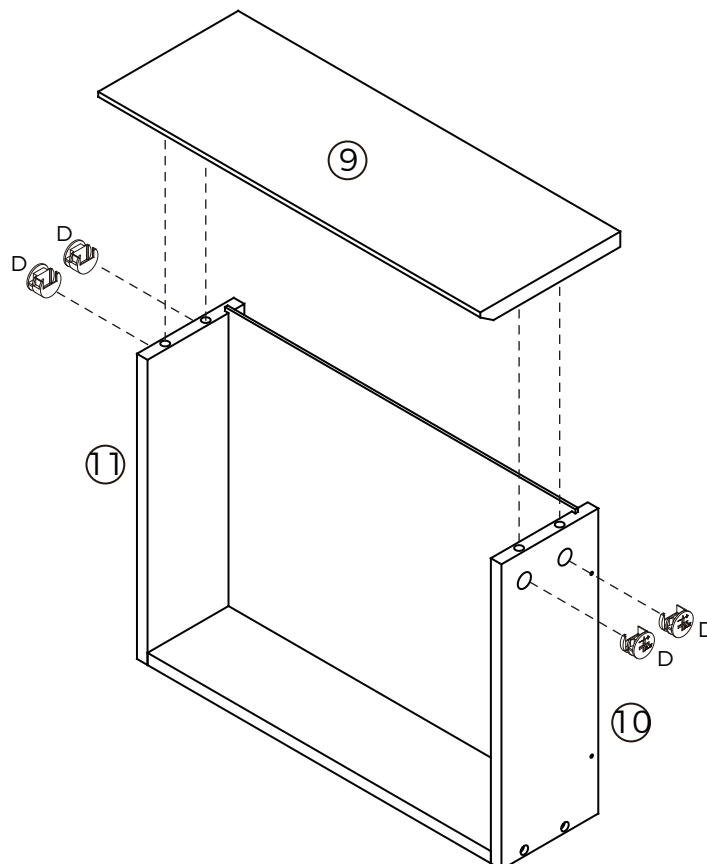

x2

You will need




8 Cam Nuts



Phillips Head
Screwdriver

13.

Attach 1 x DL Runner (H) to the bottom of Left Drawer Side [10] and 1 x DR Runner (I) to the bottom of Right Drawer Side [11] with 4 x Small Screws (E).

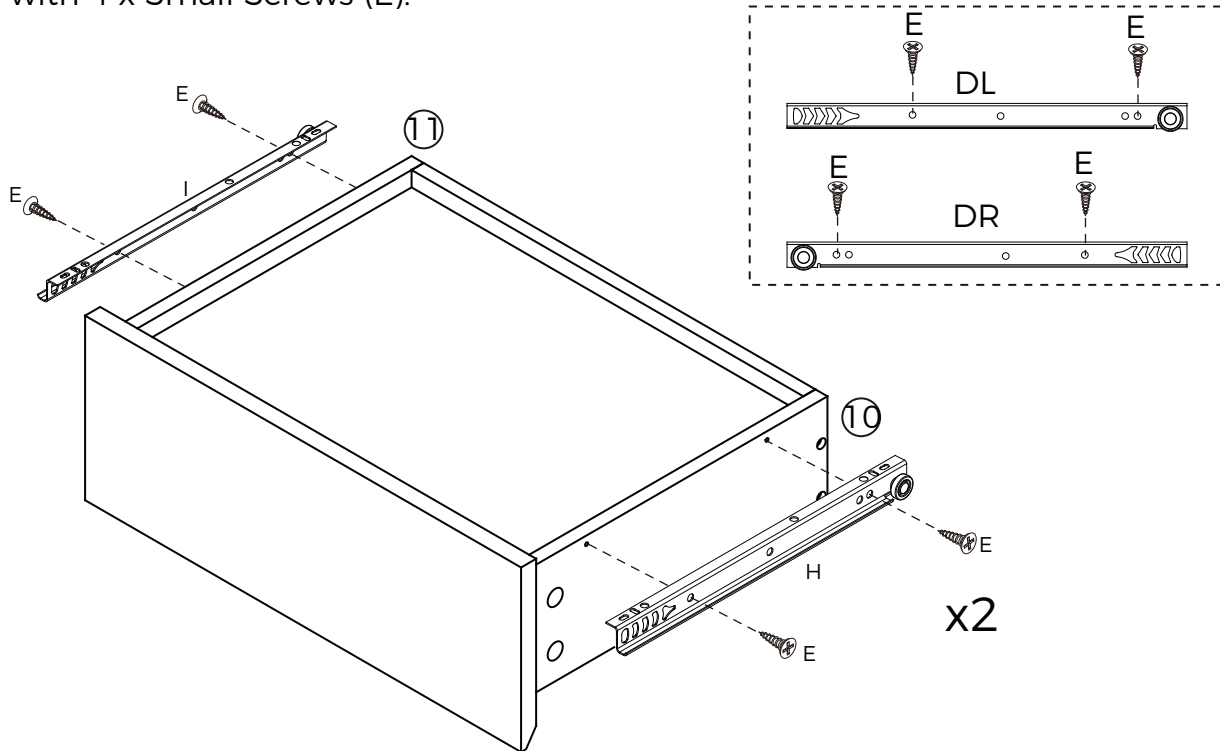

You will need



2 DL Runners



2 DR Runners




8 Small Screws



Phillips Head Screwdriver


14.

Insert the assembled drawers into the corresponding compartments.

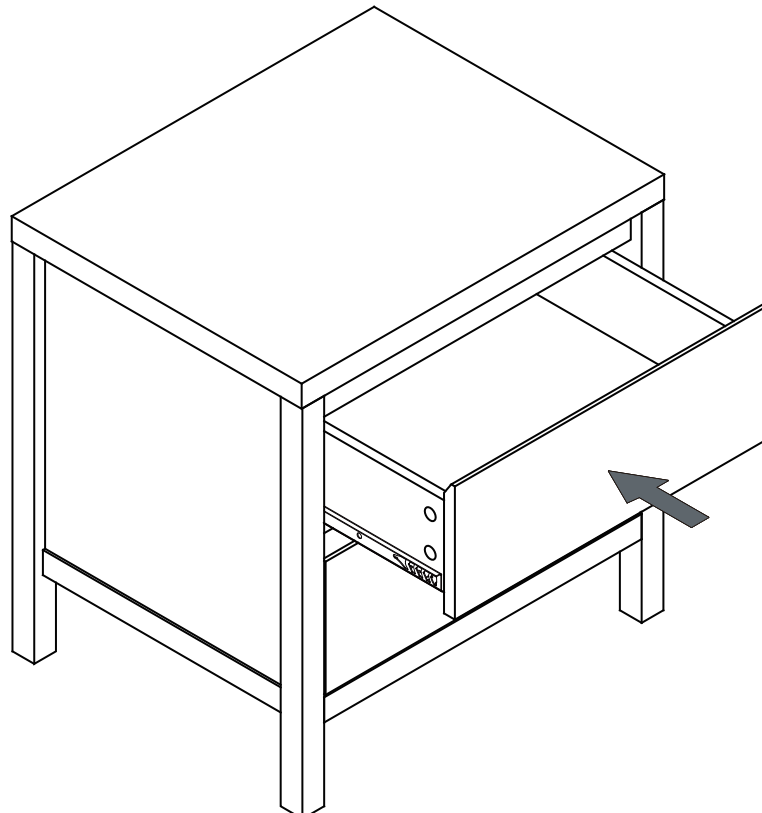

15.

Secure Back Panel [8] in place with 4 x Wedges (J) using 4 x Screws (K). Attach 1x Safety Strap (L) to the Top Panel [1] of the back side of the unit using 1x Washer (P) and 1x Screw (M).

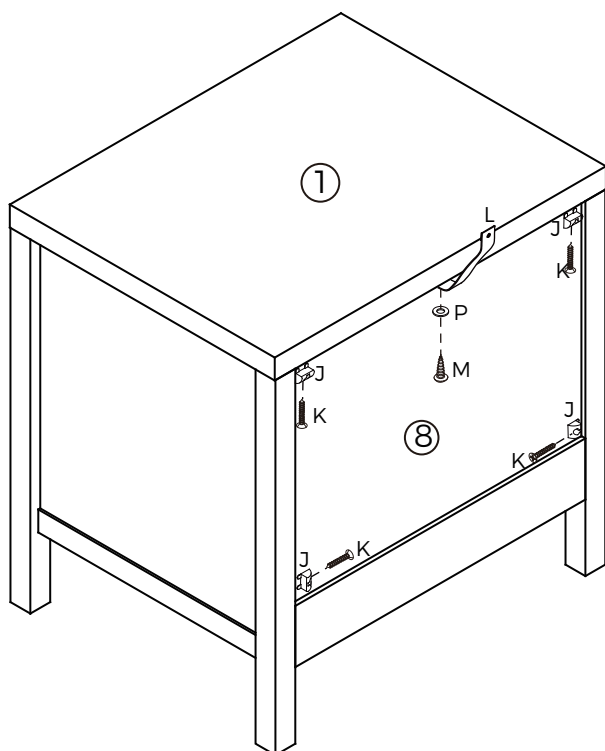

You will need



4 Wedges



4 Screws



1 Safety Strap



1 Screw





1 Washer



Phillips Head Screwdriver

16.

Move the unit to the final position. Fasten the safety strap to your wall using appropriate fixings for your wall type. If you are unsure, please seek professional advice on how to attach this safety strap to your specific wall.

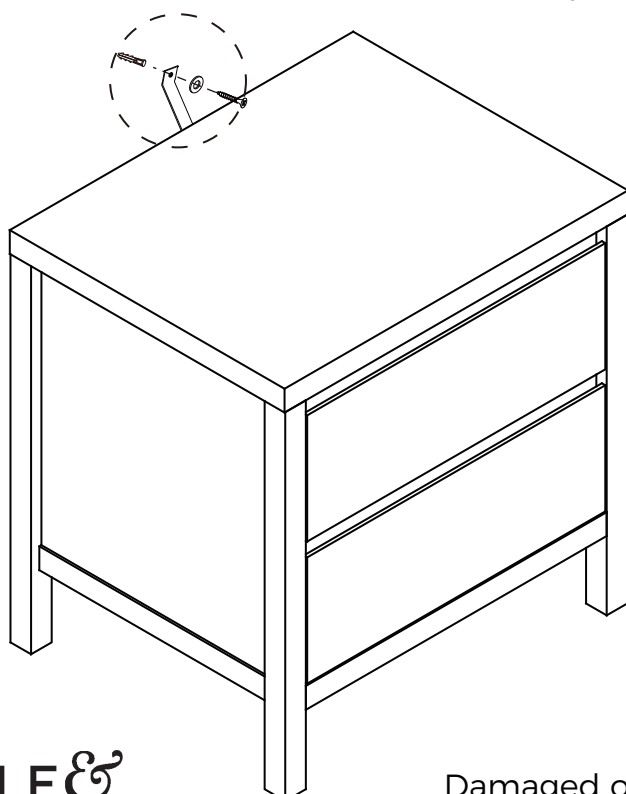

You will need



1 Wall Plug



1 Wall Screw



1 Washer



Phillips Head Screwdriver