

Noosa Bedside Table With Shelf

Read first, enjoy forever

Assembly tips

- Assemble your product on a level surface and lay something soft underneath to protect potential floor damage.
- Don't over tighten screws. During assembly we recommend tightening to approximately 70% tightness. Only tighten hardware 100% when fully assembled.
- Keep children away from assembly area as bags and small parts can pose a choking hazard.
- Make sure you have enough space to layout parts before starting. We recommend assembling your item in its final location.
- Do not stand on or put weight on the parts as it may warp or damage product.
- We do not recommend the use of drills or power tools (unless specified) as it may damage the product or hardware. Use hand held screwdrivers only.
- It is best that two people assemble the product as some products may be too heavy for one person. Check this booklet for guidance.

Safety, care and maintenance

- To reduce the risk of injury, always secure storage furniture to walls and/or floors by using tip-over restraints.
- Never let children climb or hang on drawers, doors or shelves.
- To protect your product and your home, we recommend using coasters, placemats, rugs and other protective items.
- Screws may loosen over time. We recommend setting a reminder to tighten up every six months.
- Remove any liquid spills immediately using a clean cloth with mild detergent. Do not use bleach or abrasive cleaners. Always test any cleaning agent in an inconspicuous spot first to know if it is suitable.

Recycling

We hope that you love your product forever, but we know situations change. In the event that you wish to dispose of your product please consider some creative ways to give it a new home:

- If it's still in great shape, sell it on your favourite online marketplace!
- Give it a second life by affording it a fresh coat of paint.
- If you must dispose of it, why not donate it to your local charity or shelter for someone else to enjoy.

Please dispose of this product and packaging responsibly and recycle where possible. Scan the QR code to read more about Temple and Webster's commitment to a more sustainable future.



Important safety instructions

DANGER!

Children have died from furniture tip over.

Toppling Hazard Warning

- ALWAYS secure items with an anchor device
- For safety reasons, we recommend you follow the provided instructions
- When installed properly, the provided hardware may prevent the unit from tipping over unexpectedly.
- Never let children climb or hang on drawers, doors or shelves.
- NEVER open more than one drawer at a time
- Place heavy items down low
- For advice on suitable fastening devices, contact your local specialized dealer




Parts List

ASSEMBLY INSTRUCTIONS


Noosa Bedside Table With Shelf

FJHBSDWH

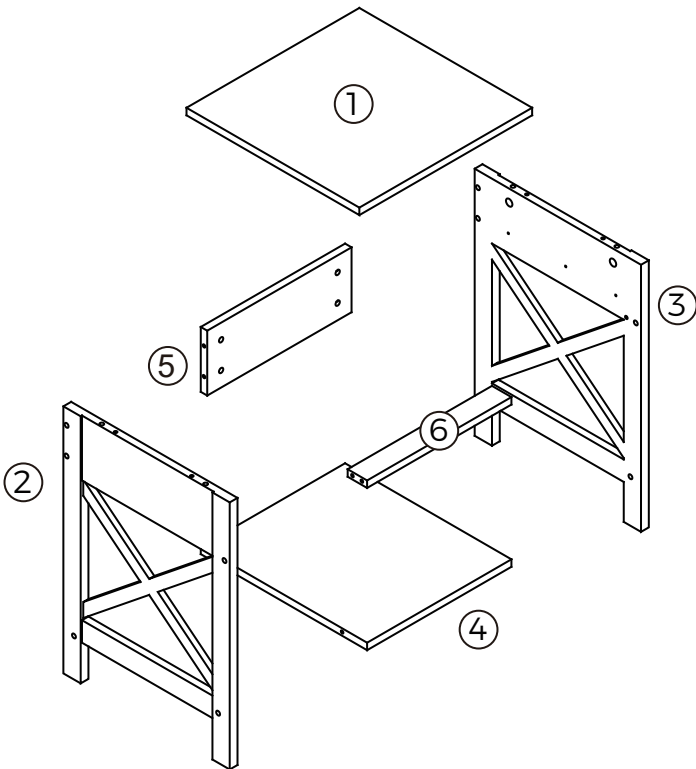





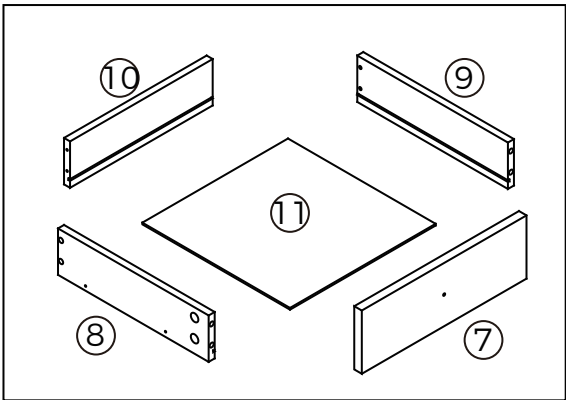















NUMBER OF PEOPLE REQUIRED FOR ASSEMBLY:
1

TOOLS REQUIRED FOR ASSEMBLY




Hardware

A	B	C	D	E	F	G	H
							
Dowels x6	Screws x4	Cam Bolts x8	Cam Nuts x8	Small Screws x10	CL Runner Track x1	CR Runner Track x1	DL Runner x1
I	J	K	L	M	N	O	P
							
DR Runner x1	Handle x1	Handle Bolts x2	Stickers x10	Bolts x10	Nuts x10	Safety Strap x1	Screw x1
Q	R	S	T				
							
Wall Plug x1	Wall Screw x1	Washers x2	Handle x1				

1.

Attach 1 x CL & CR Runner Track (F,G) to Left & Right Side Panels [2 & 3] with 6 x Small Screws (E).

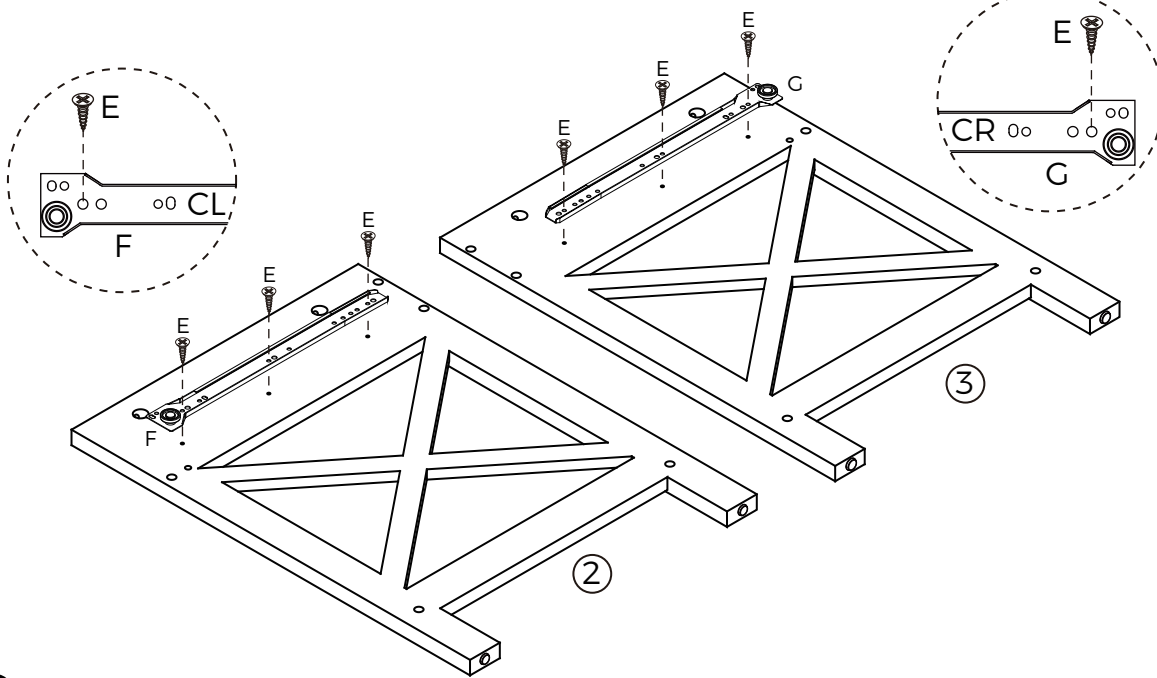

You will need

1 CL Runner Track


1 CR Runner Track

6 Small Screws

Phillips Head Screwdriver

2.

Insert 1 x Dowel (A) into Rail [6]. Push 5 x Bolts (M) through Left Side Panel [2] and insert 5 x Nuts (N) into Shelf Panel [4], Rail [6] and Back Panel [5]. Rotate the nuts so the opening point towards the incoming bolts. Attach Shelf Panel [4], Rail [6] and Back Panel [5] to Left Side Panel [2] by tightening all nuts with the Phillips Head Screwdriver.

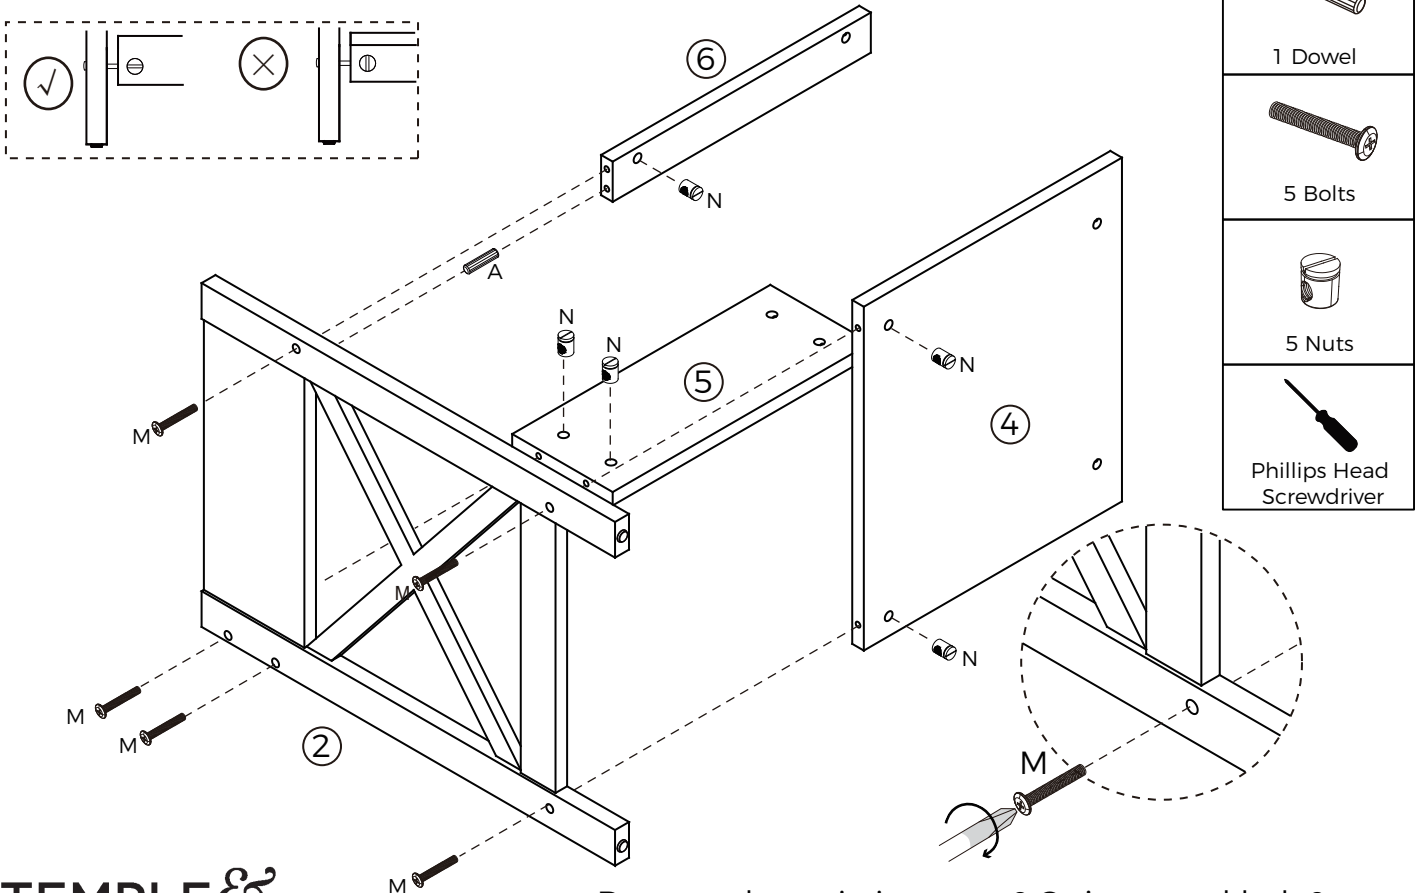

You will need

1 Dowel


5 Bolts

5 Nuts


Phillips Head Screwdriver

3.

Insert 1 x Dowel (A) into Rail [6]. Push 5 x Bolts (M) through Right Side Panel [3] and insert 5 x Nuts (N) into Shelf Panel [4], Rail [6] and Back Panel [5]. Rotate the nuts so the opening point towards the incoming bolts. Attach Right Side Panel [3] to Shelf Panel [4], Rail [6] and Back Panel [5] by tightening all nuts with the Phillips Head Screwdriver.

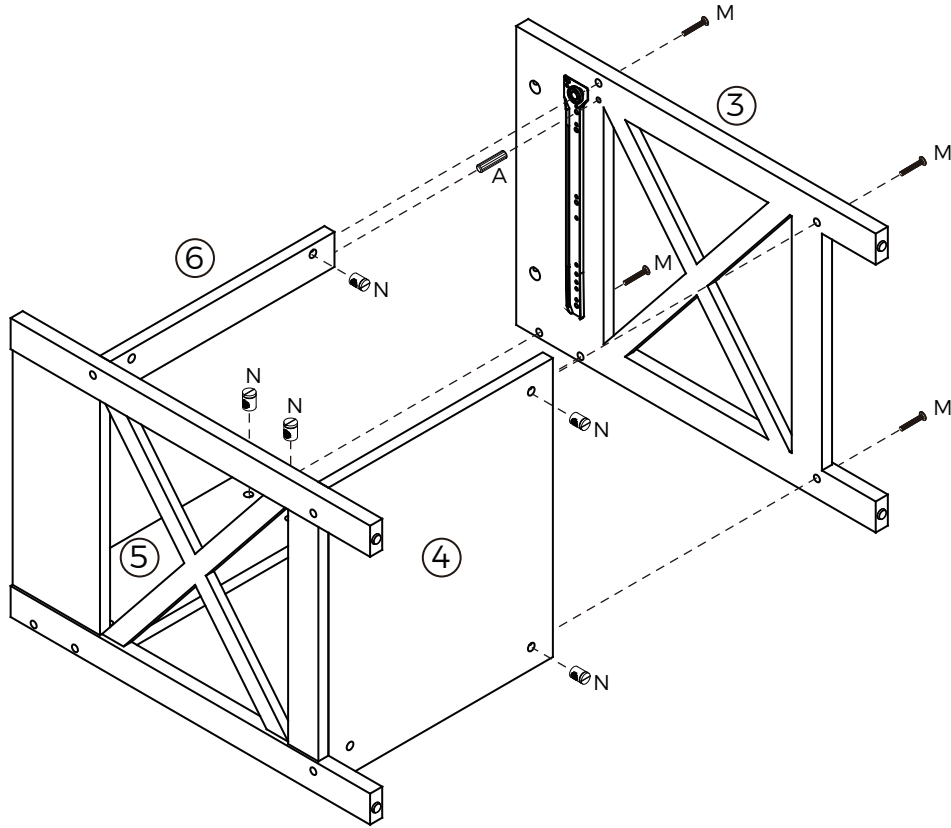

You will need



1 Dowel





5 Bolts



5 Nuts




Phillips Head Screwdriver




Ensure slot in nut is facing incoming bolt.

4.

Attach 4 x Cam Bolts (C) to Top Panel [1].

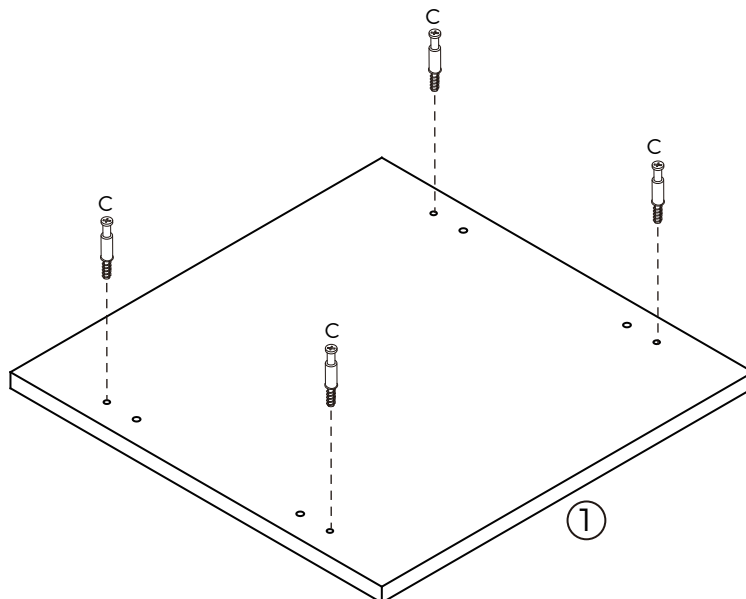

You will need




4 Cam Bolts




Phillips Head Screwdriver

5.

Insert 4 x Cam Nuts (D) and 4 x Dowels (A) into the holes of Side Panels [2, 3]. Rotate the cam nuts so the arrows point towards the incoming cam bolts. Attach Top Panel [1] into place and tighten the cam nuts.

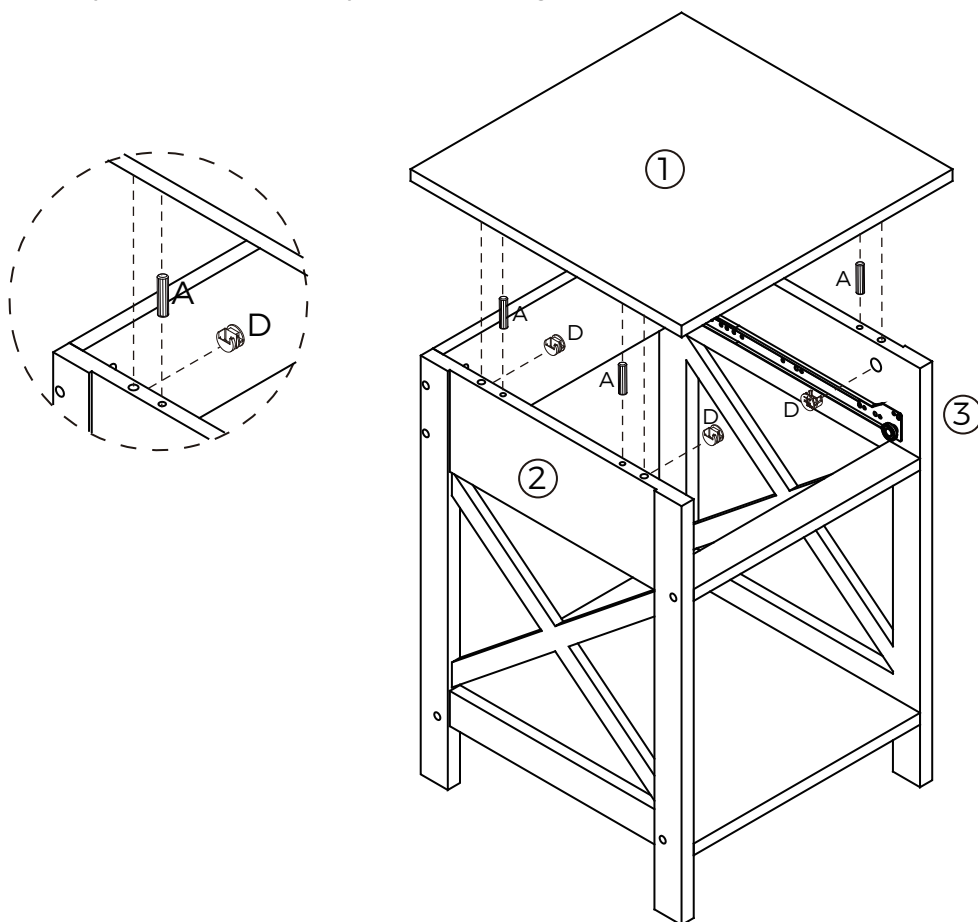

You will need



4 Dowels




4 Cam Nuts



Phillips Head
Screwdriver

6.

Attach 4 x Cam Bolts (C) to Drawer Front [7].

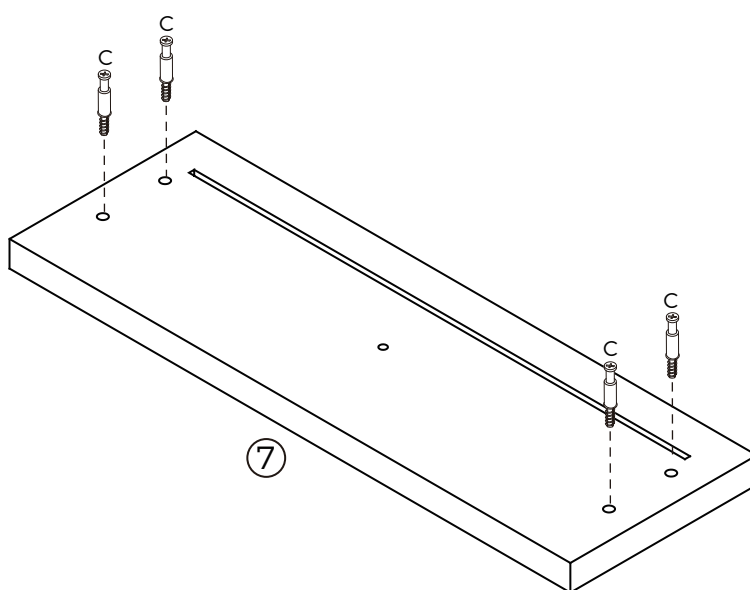

You will need




4 Cam Bolts



Phillips Head
Screwdriver

7.

Attach Drawer Back [10] to Left & Right Drawer Sides [8 & 9] with 4 x Screws (B).

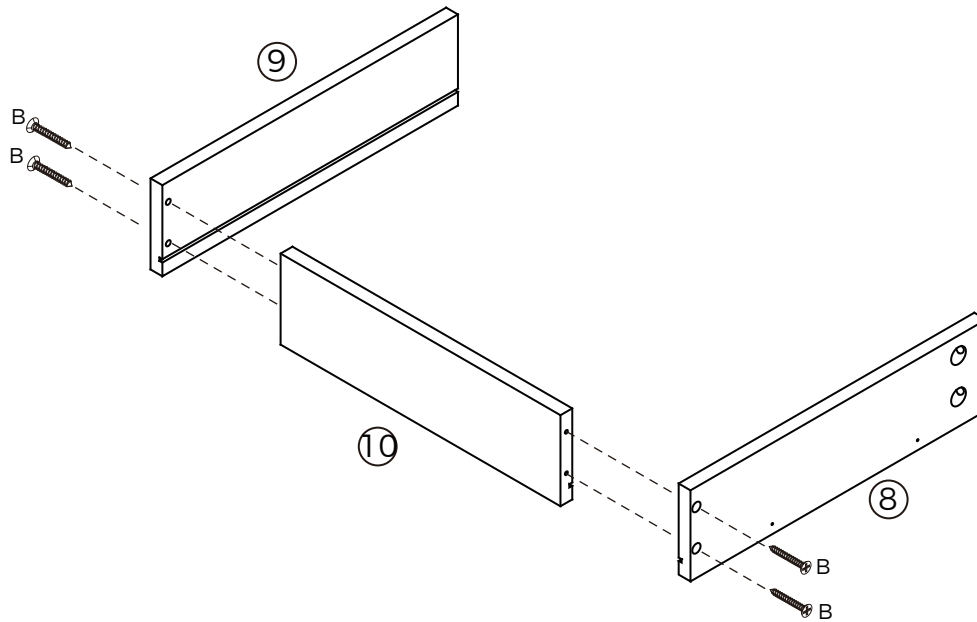

You will need




4 Screws



Phillips Head
Screwdriver

8.

Slide Drawer Base [11] into the grooves of Left & Right Drawer Sides [8 & 9].

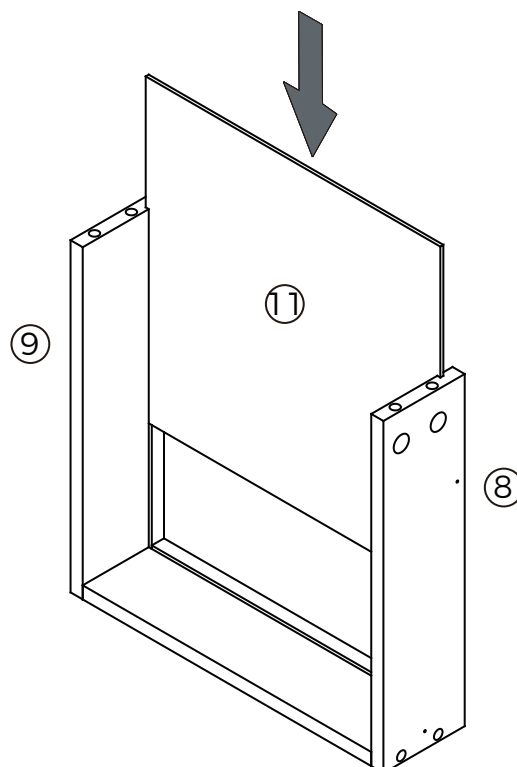


**TEMPLE &
WEBSTER**

Damaged or missing parts? Or just need help?
Contact us on service@templeandwebster.com.au

9.

Insert 4 x Cam Nuts (D) into Left & Right Drawer Sides [8 & 9]. Rotate the cam nuts so the arrows point towards the incoming cam bolts. Attach Drawer Front [7] to Left & Right Drawer Sides [8 & 9]. Make sure that the groove lines up the whole way around the drawer.

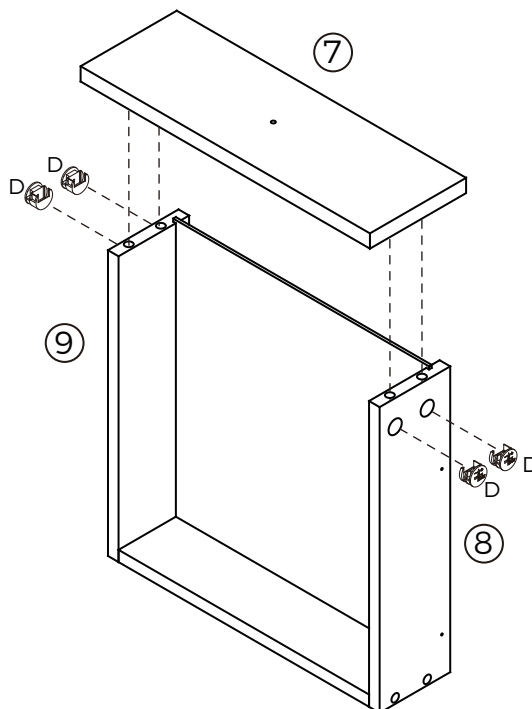

You will need




4 Cam Nuts



Phillips Head Screwdriver

10.

Attach 1 x DL Runner (H) to the bottom of Left Drawer Side [8] and 1 x DR Runner (I) to the bottom of Right Drawer Side [9] with 4 x Small Screws (E).

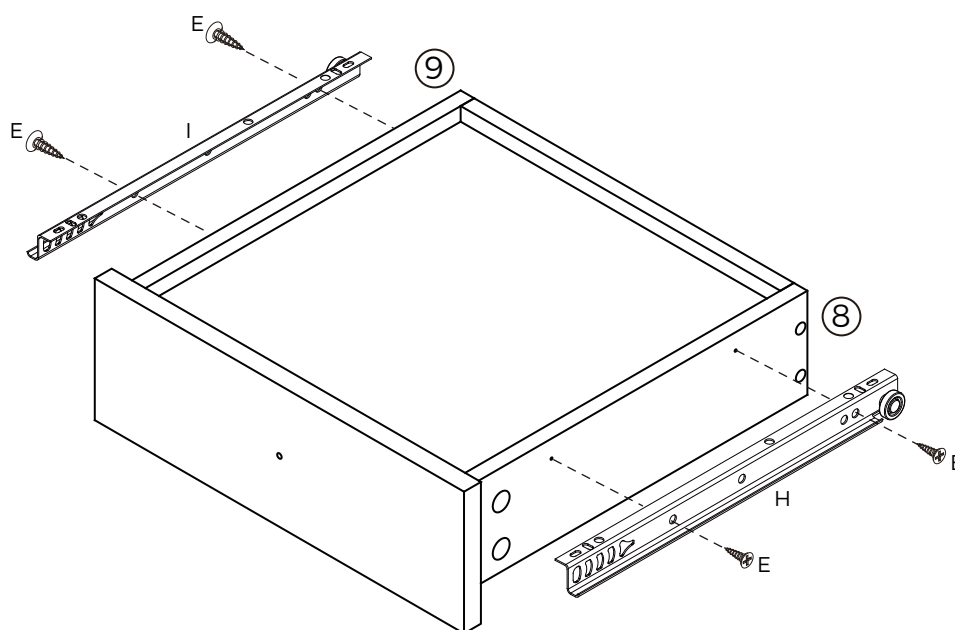

You will need



1 DL Runner



1 DR Runner




4 Small Screws



Phillips Head Screwdriver

11.

Attach 1 x Handle (J) to Drawer Front [7] with 1 x Handle Bolt (K) or 1 x Handle (T) to Drawer Front [7] with 1 x Handle Bolt (K).

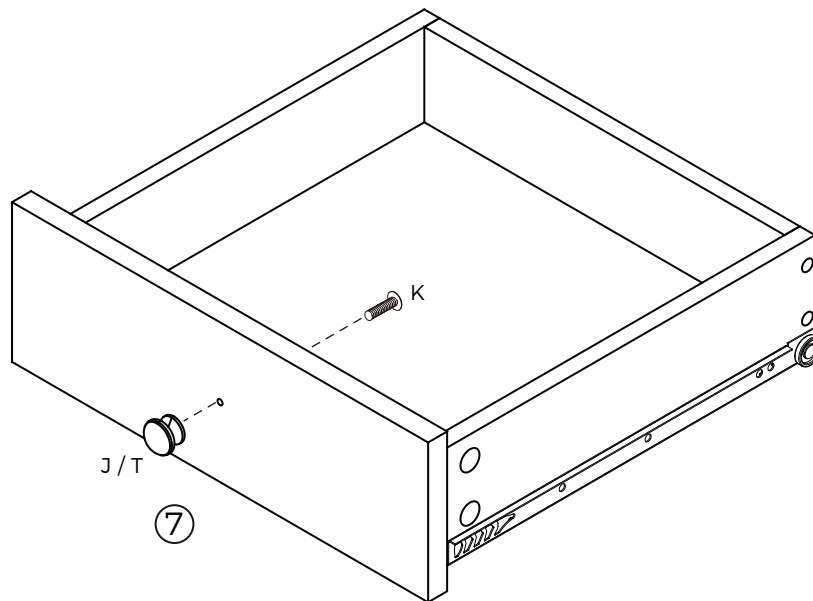

You will need



1 Handle



2 Handle Bolts




1 Handle



Phillips Head
Screwdriver


12.

Insert the assembled drawer into the corresponding compartments.

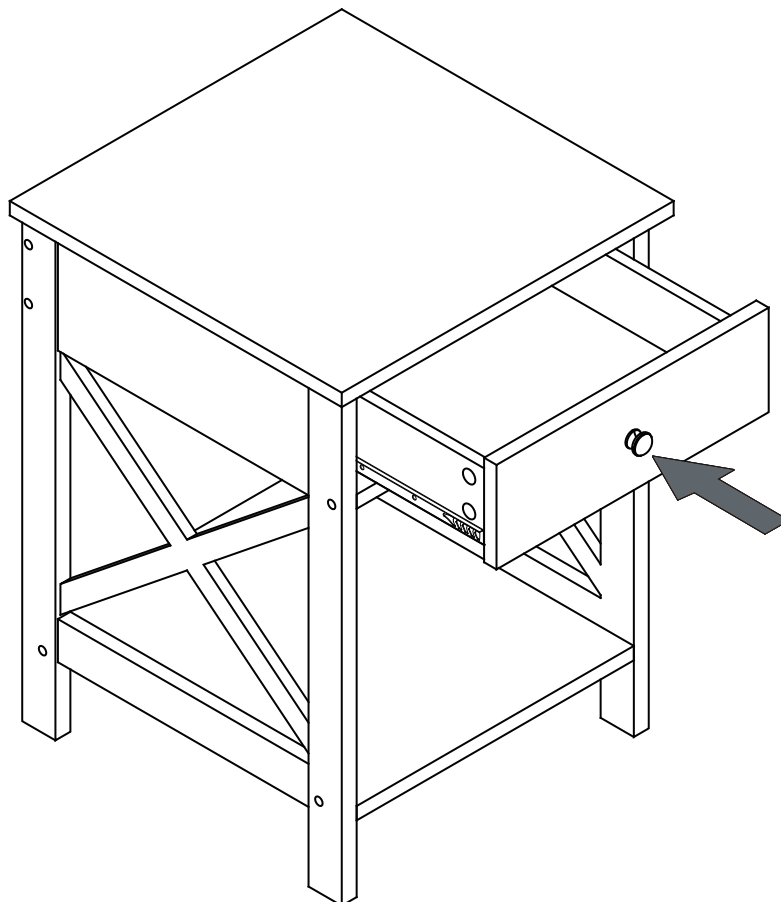

13.

Attach 1 x Safety Strap (O) to the Back Panel [5] using 1 x Washer (S) and 1 x Screw (P).

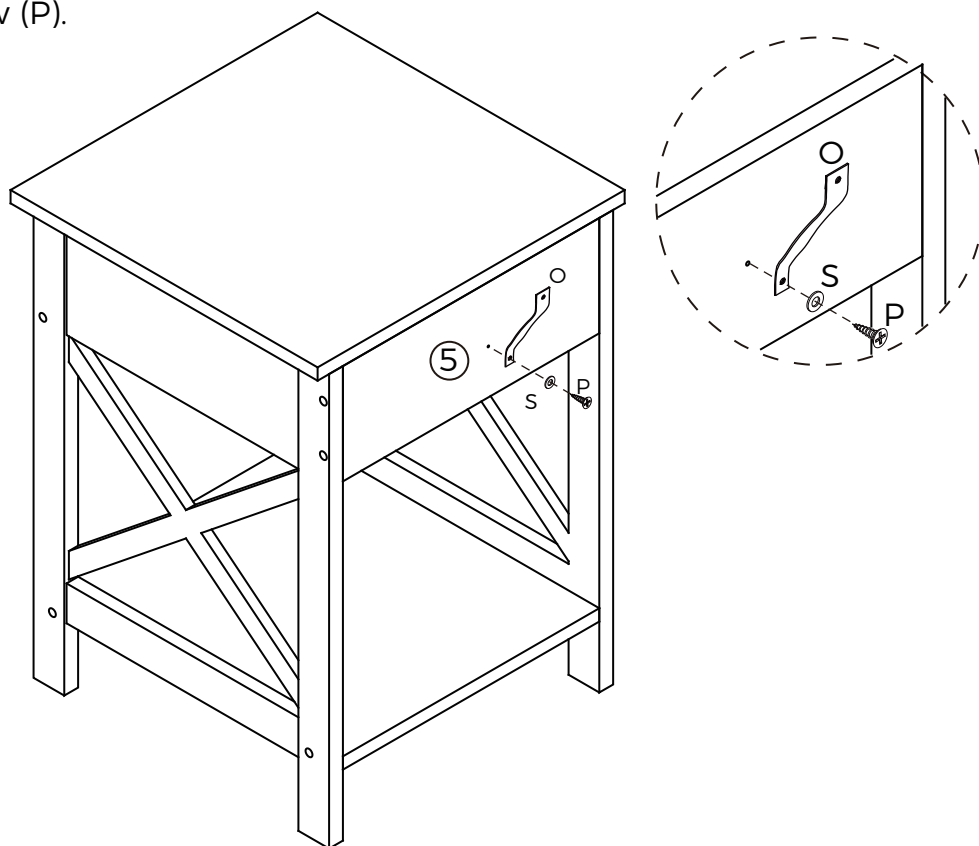

You will need



1 Safety Strap



1 Screw




1 Washer



Phillips Head
Screwdriver

14.

Attach 10 x Hole Stickers (L) to Side Panels [2 & 3].

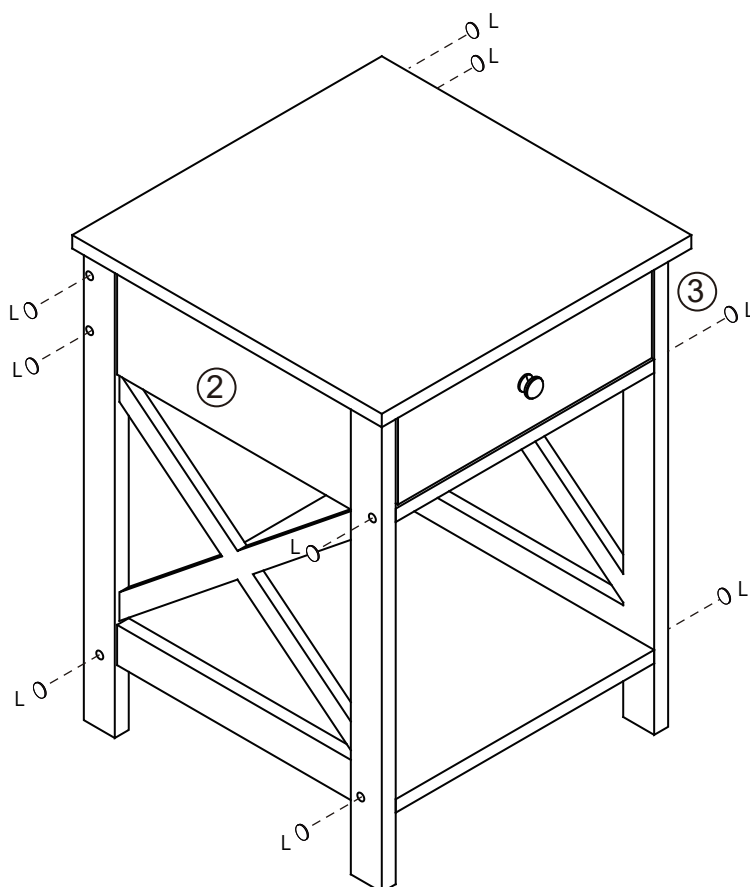


You will need



10 Stickers

15.

Move the unit to the final position. Fasten the safety strap to your wall using appropriate fixings for your wall type. If you are unsure, please seek professional advice on how to attach this safety strap to your specific wall.

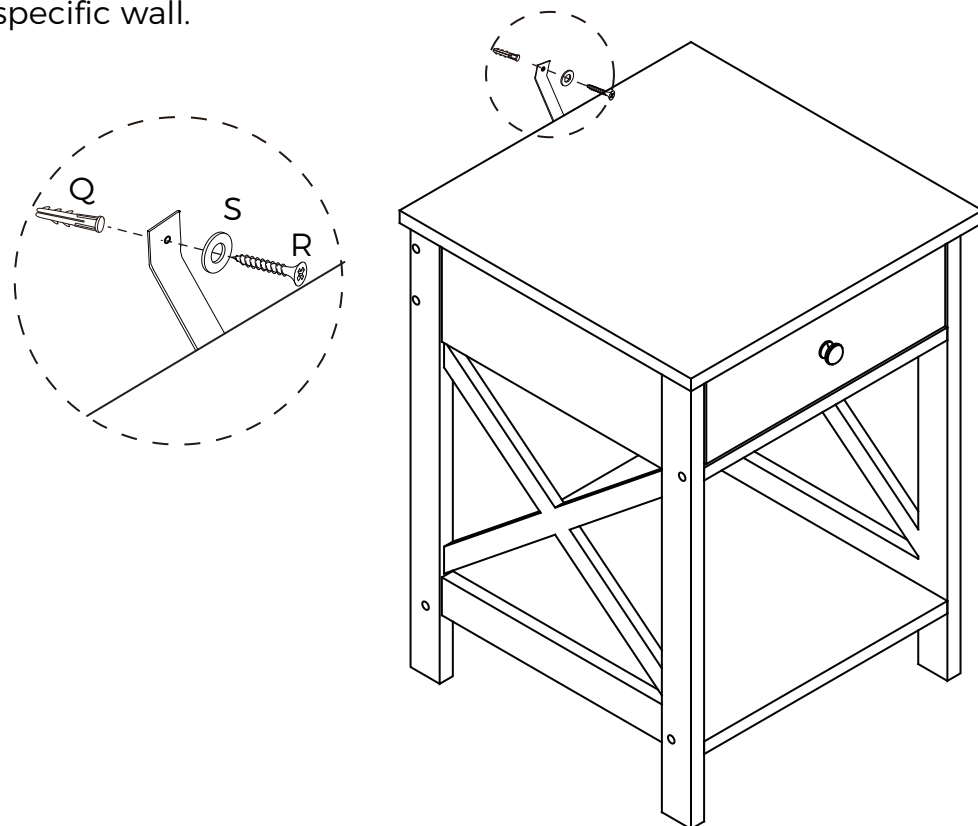

You will need



1 Wall Plug



1 Wall Screw



1 Washer



Phillips Head
Screwdriver

16.

