


WHISPER DC 48"




WHISPER | DC 48"

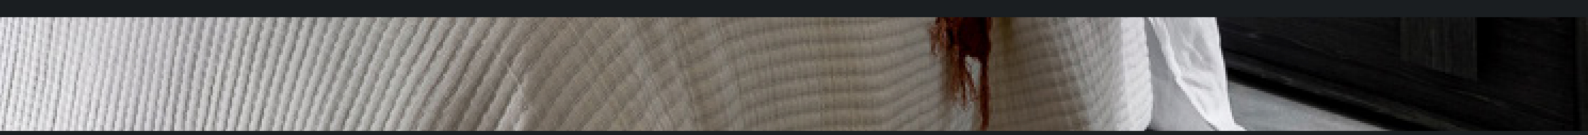

4 YEAR MOTOR WARRANTY
1 YEAR IN HOME
3 YEAR MOTOR REPLACEMENT*
*Upon Product Registration


NO LIGHT

C3000/101D	-	48" (122cm) -	White
C3000/123D	-	48" (122cm) -	White/Light Oak
C3000/202D	-	48" (122cm) -	Black

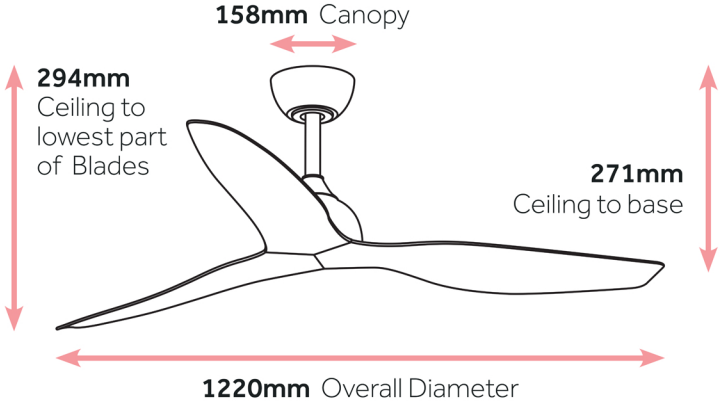

DIMMABLE CCT LED LIGHT

C3001/101D	-	48" (122cm) White	-	CCT LED
C3001/123D	-	48" (122cm) White/Light Oak		CCT LED
C3001/202D	-	48" (122cm) Black	-	CCT LED

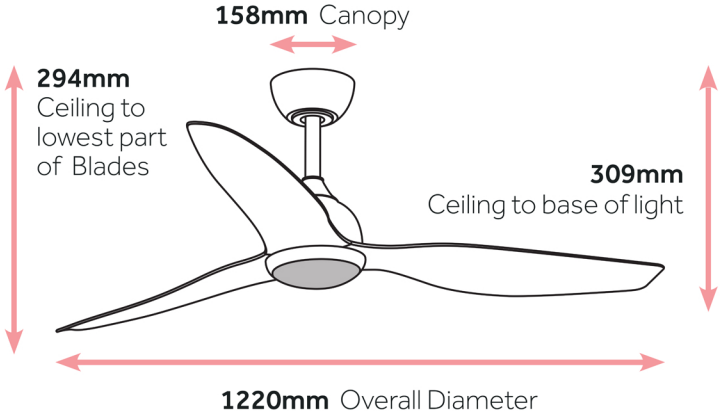

NOTE: Dimensions based on 127mm Down-Rod.
For 254mm Down-Rod, blade to drop is 434mm.

SPECIFICATIONS:

- Suitable for indoor / outdoor undercover use
- Suitable for ceilings up to 15°
- Reversible for winter use
- Includes remote control - 6 selectable speeds
- Energy saving DC motor
- High quality lightweight ABS plastic blades
- Quiet operation
- 1Hr/2Hr/4Hr Timer settings
- Blade Pitch 12°
- Available with/without dimmable CRI 90 CCT LED light

PERFORMANCE DATA:

Speed	Power (Watts)	RPM	Airflow
1 - Low	1.7	60	2,832 m³/hr
2	2.4	87	3,663 m³/hr
3	4.6	121	5,794 m³/hr
4	7.9	152	6,839 m³/hr
5	13.7	181	7,908 m³/hr
6 - High	30	235	9,054 m³/hr

CCT LED LIGHT DATA:

Color rendering index: - CRI90

Colour Temp	Power (Watts)	Max Lumen's
3000k	20	2102 lm
4000k	20	1959 lm
6000k	20	1956 lm

ACCESSORIES

REPLACEABLE CCT LED LIGHT:

User replaceable LED light module, available to purchase if required or if you just want to have a spare!

CLSP13-FM009
Replaceable CCT LED

EXTENSION RODS:

Additional Extension Rods, available to purchase if required, so you can get the extra depth you need!

All Extension Rods compatible with CCT LED Light, or No Light models.

K702M/106A	-	60cm White
K702M/206A	-	60cm Black
K702M/109A	-	90cm White
K702M/209A	-	90cm Black
K702M/115A	-	150cm White
K702M/215A	-	150cm Black